

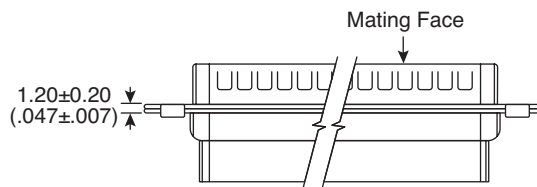



# D-Sub Connector Crimp Housing Male

156-1410-E, 156-1416-E, 156-1426-E

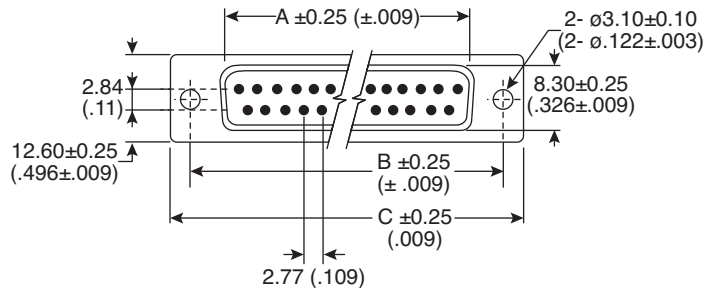

D-Sub Connector Crimp Housing Male



Dimensions: mm (in.)

## MATERIAL SPECIFICATIONS

<b>Front Insulator:</b>	P.B.T. Black
<b>Back Insulator:</b>	PA66 Black
<b>Contact:</b>	Brass, t=0.20mm, Gold flashed
<b>Shell:</b>	Cold rolled steel, t=0.40mm Tin/Nickel/Zinc plated

## ELECTRICAL SPECIFICATIONS

<b>Current Rating:</b>	1 A Max.
<b>Dielectric Withstanding Voltage:</b>	500 VAC for 1 minute
<b>Contact Resistance:</b>	30 mΩ Max.
<b>Insulation Resistance:</b>	1000 MΩ Min at DC 500V
<b>Temperature Range:</b>	-55°C~+105°C
RoHS Compliant	

Mouser Stock No.	No. of Contacts	Dimensions: mm		
		A	B	C
156-1410-E	9	16.92	25.00	30.80
156-1416-E	15	25.25	33.32	39.20
156-1426-E	25	38.96	47.04	53.05

Date Last Revised: 9-11-07

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

KC-301178

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

156-1410-E, 156-1416-E, 156-1426-E