


Non-Insulated Ring Connectors

159-1217, 159-1219, 159-1220, 159-1221



Non-Insulated Ring Connectors

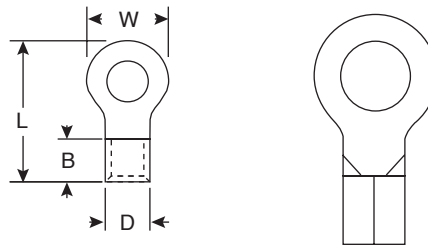

| SPECIFICATIONS | |
|---------------------------|------------------------------|
| Wire Range: | 12-10 AWG |
| Maximum Electric Current: | 48 amps |
| Terminal Material: | Copper, .039" (1.0mm) thick |
| Seam: | Brazed |
| Terminals: | Non-insulated |

| Mouser Stock No. | Stud Size | Dimensions: In. | | | |
|------------------|-----------|-----------------|-------|------|------|
| | | W | L | B | D |
| 159-1217 | #8 | .374 | .780 | .268 | .220 |
| 159-1219 | 1/4 | .472 | 1.016 | .268 | .220 |
| 159-1220 | 5/18 | .591 | 1.102 | .268 | .220 |
| 159-1221 | 5/18 | .591 | 1.102 | .268 | .220 |

Date Last Revised: 6-24-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300033

159-1217, 159-1219, 159-1220, 159-1221