


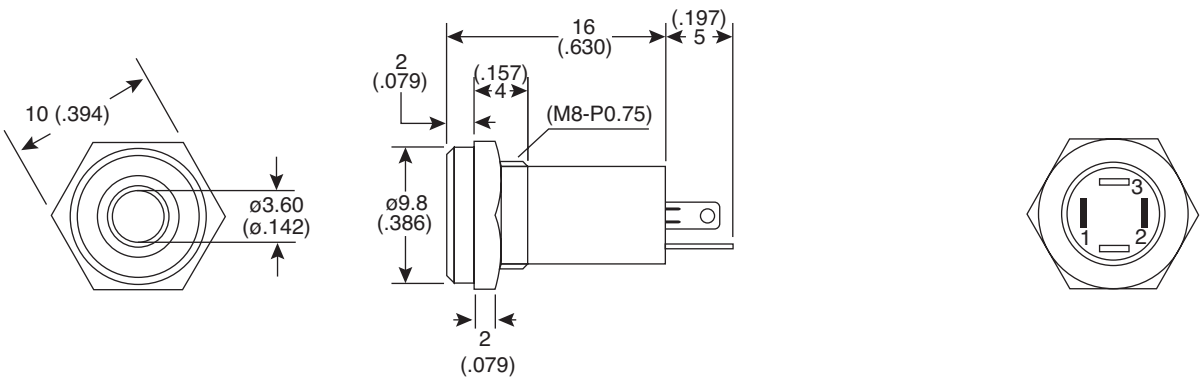



3.5mm Mono

161-1640-EX



3.5mm Mono



DIMENSIONS mm (in.)
(except where noted)

| SPECIFICATIONS | |
|--------------------------------|--------------------------|
| Dielectric strength: | 500V AC for one minute |
| Contact resistance: | 50mΩ max |
| Insulation resistance: | 100MΩ min. at 500V DC |
| Body material: | Polyamide66 (PA66 Nylon) |
| Mating cycles life min: | 5,000 |
| Insertion force: | 30 - 30N |
| Extraction force: | 30 - -30N |
| RoHS Compliant by Exemption | |

| Mating Plugs |
|---|
| 17PP047-EX, 171-3200-EX, 171-3201-EX, 171-3302-EX |

Date Last Revised: 1-30-15

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-300852

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

161-1640-EX