

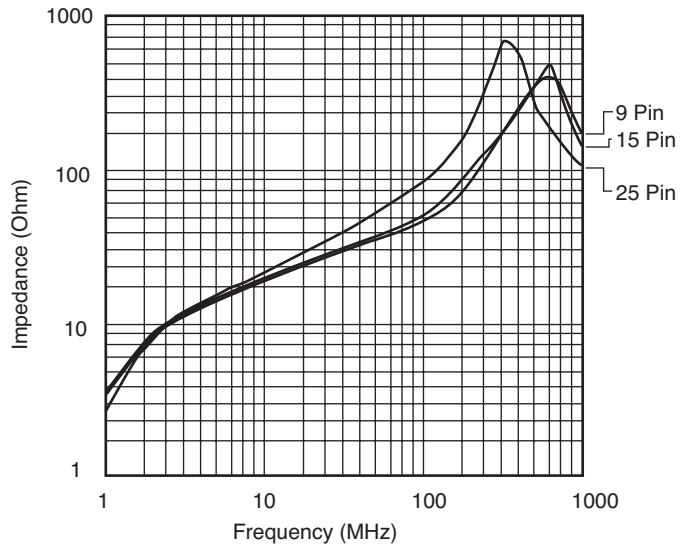



# D-Subminiature Connectors

152-3609, 152-3615, 152-3625

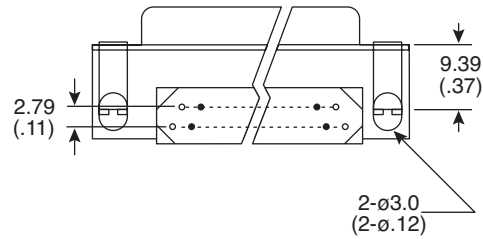

D-Subminiature Connectors

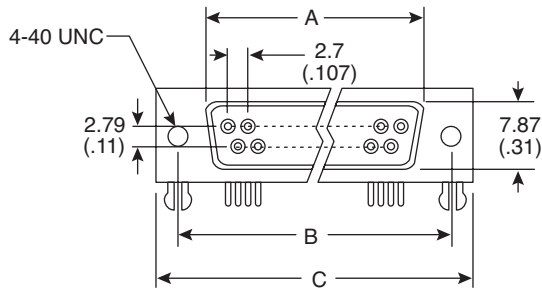

Dimensions: mm (IN.)

## SPECIFICATIONS

<b>Insulation resistance:</b>	5,000MΩ min. @ 500VDC
<b>Contact resistance:</b>	20mΩ max. @ 100mADC
<b>Current rating:</b>	1A
<b>Withstand voltage:</b>	1,000VAC for 1 minute
<b>Operating temperature:</b>	-55°C~ + 105°C
<b>Contact:</b>	Brass
<b>Housing:</b>	PBT & 30% glass fiber
<b>Type:</b>	Filtered, right angle, female
<b>Plating:</b>	Gold plated

Mouser Stock No.	No. of Contacts	Dimensions		
		A	B	C
152-3609	9	.64	.98	1.2
152-3615	15	.97	1.3	1.5
152-3625	25	1.5	1.8	2.1

152-3609, 152-3615, 152-3625

Date Last Revised: 10-18-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC- 300259