


High Density D-Sub PCB Right Angle Female

156-3215-E, 156-4215-E



High Density D-Sub PCB Right Angle Female

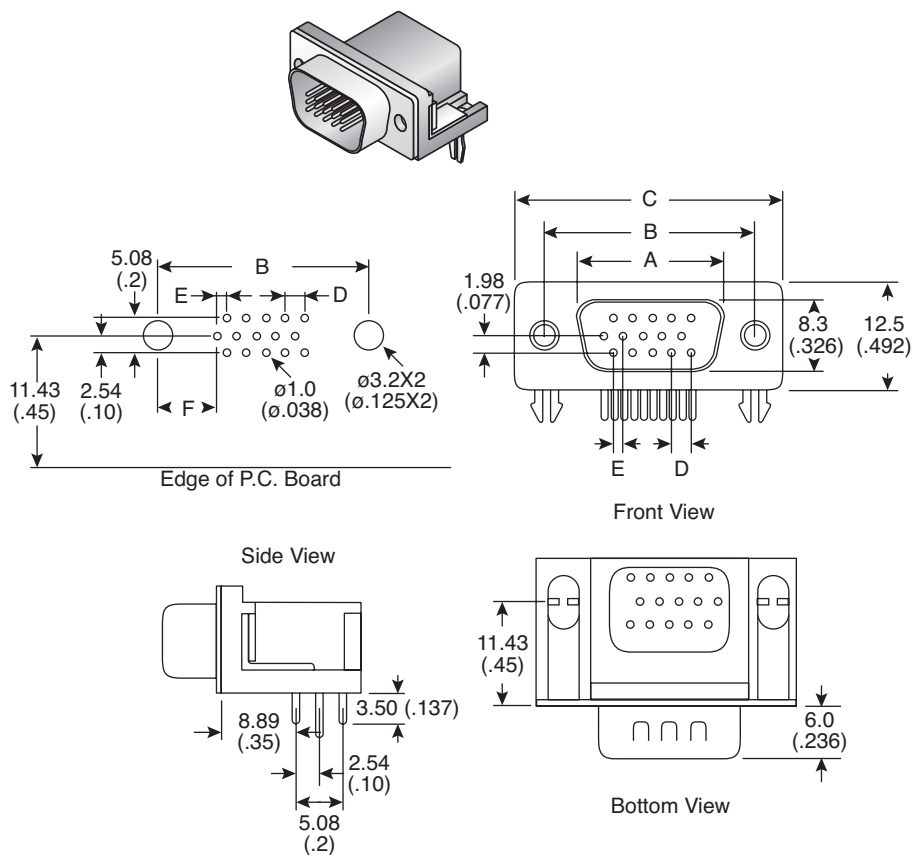

Dimensions: mm (in.)

Part No.	Size	A	B	C	D	E	F
156-3215-E	15mm	16.92	25.00	30.80	2.29	1.14	7.04
156-4215-E	26mm	25.25	33.30	39.20	2.29	1.14	6.88

MECHANICAL SPECIFICATIONS

Insulator	Thermal Plastic
Contacts	Copper Alloy
Shell	Steel
Rivet, Boardlock	Copper Alloy
Contact Plating	Underplate: 50µ" Nickel
	Contact Area: 1µ"~30µ" Selective Gold
	Solder Tails Area:
	100µ" Tin/Lead(Brighten Lead) or
	100µ" Tin/Lead(Brighten Tin/Matte Tin)

ELECTRICAL SPECIFICATIONS

Operation Voltage	250 VAC Max.
Current Rating	3 Amps Max
Contact Resistance	15 mΩ Min @ 500 VDC
Dielectric Withstanding Voltage	1000 VAC / Minute
Operating Temperature	-55°C to +105°C
RoHS Compliant	

Date Last Revised: 04-06-12

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC- 301180

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

156-3215-E, 156-4215-E