



High Density D-Sub PCB Right Angle Female




156-3315-E

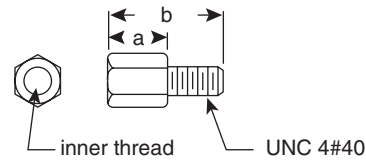

High Density D-Sub PCB Right Angle Female

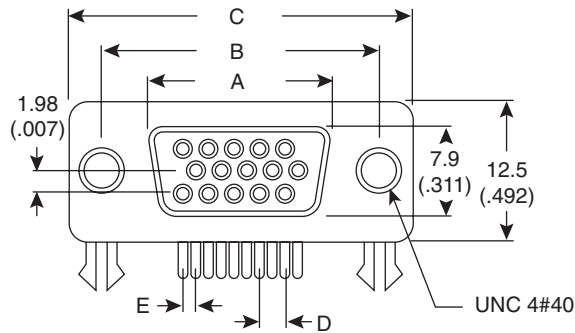

Parts no.	DIM a	DIM b	Inner thread
B	4.8	11.8	4/40
D	5.8	12.0	4/40
F	4.6	11.8	M3
W	4.5	11.8	M2.6
Y	5.6	12.0	M2.6

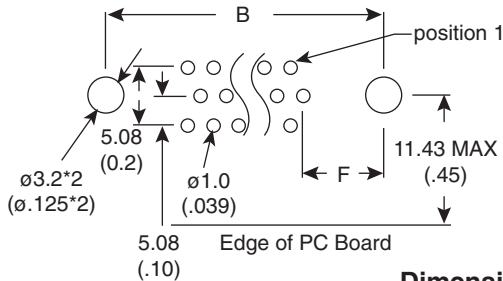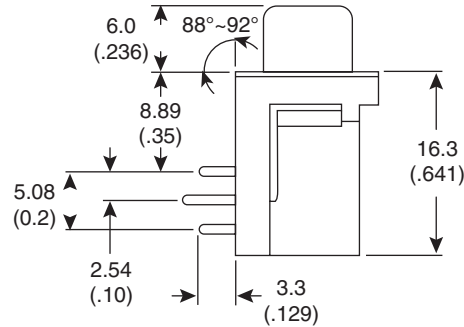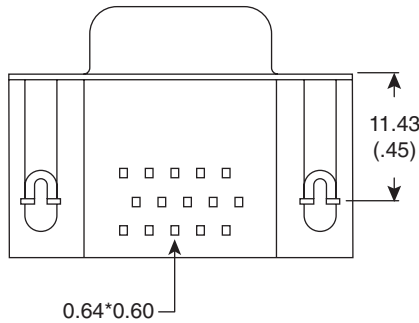

Dimensions: mm (In.)

MECHANICAL SPECIFICATIONS	
Insulator	Thermal Plastic
Contacts	Copper Alloy
Shell	Shell
Rivet Boardlock	Copper Alloy
Contact Plating	
Underplate	Underplate: 50µ" Nickel
Contact Area	1µ"~30µ"
Solder Tails Area	100µ" Tin/Lead (Brighten Tin) or 100µ" (Brighten Tin/Matte Tin)

ELECTRICAL SPECIFICATIONS	
Voltage Rating	250 VAC Max.
Current Rating	3 Amp
Contact Resistance	15mΩ Max.
Insulation Resistance	3000MΩ min @ 500VDC
Dielectric Withstanding Voltage	1000VAC/Minute
Operating Temperature	-55°C to 105°C

Contacts	A	B	C	D	E	F
15F	16.30	25.00	30.8	2.29	1.14	7.04

Date Last Revised: 6-29-12

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-301179

156-3315-E