

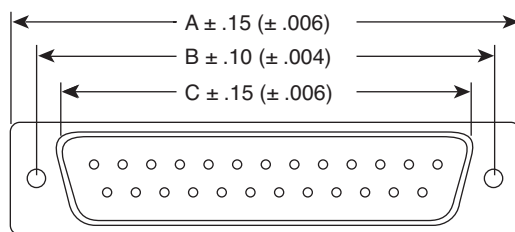


Mini-Size Gender Changer

157-0300, 157-0304, 157-0308

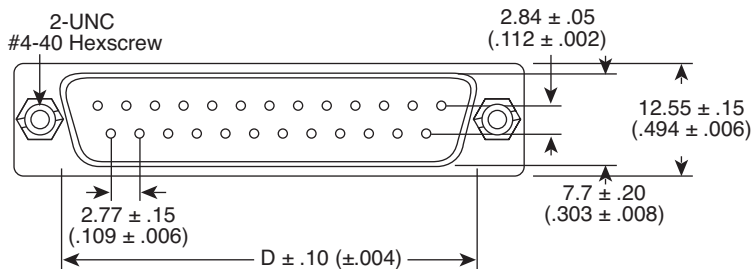

Mini-Size Gender Changer

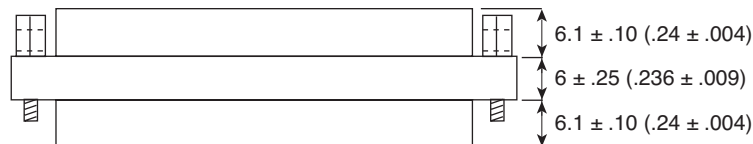

DIMENSIONS: mm

| MOUSER STOCK NO. | Number of Contacts | Dimensions: mm (in.) | | | |
|------------------|--------------------|----------------------|--------------|--------------|--------------|
| | | A | B | C | D |
| 157-0300 | 9 | 30.8 (1.21) | 25.0 (.984) | 16.92 (.666) | 16.92 (.666) |
| 157-0304 | 15 | 39.2 (1.54) | 33.3 (1.31) | 25.25 (.994) | 25.25 (.994) |
| 157-0308 | 25 | 53.05 (2.09) | 47.04 (1.85) | 38.96 (1.53) | 38.96 (1.53) |

| SPECIFICATIONS | |
|-----------------------|----------------------------|
| Type: | Male/Male |
| Insulator: | PBT glass fiber reinforced |
| Contact: | Brass |
| Contact Plating: | Gold over nickel |
| Shell: | Tin plated |
| Screw: | UNC #4-10 hexscrew |
| Current Rating: | 3A |
| Dielectric Strength: | 1000VAC for 1 minute |
| Insulator Resistance: | 1000MΩ min. @500VDC |
| Temperature: | -55°C ~ +105°C |

Date Last Revised: 08-25-11

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-300688

157-0300, 157-0304, 157-0308