


PCB Modular Jacks



154-UL6441, 154-UL6641, 154-UL6661, 154-UL6881

PCB Modular Jacks

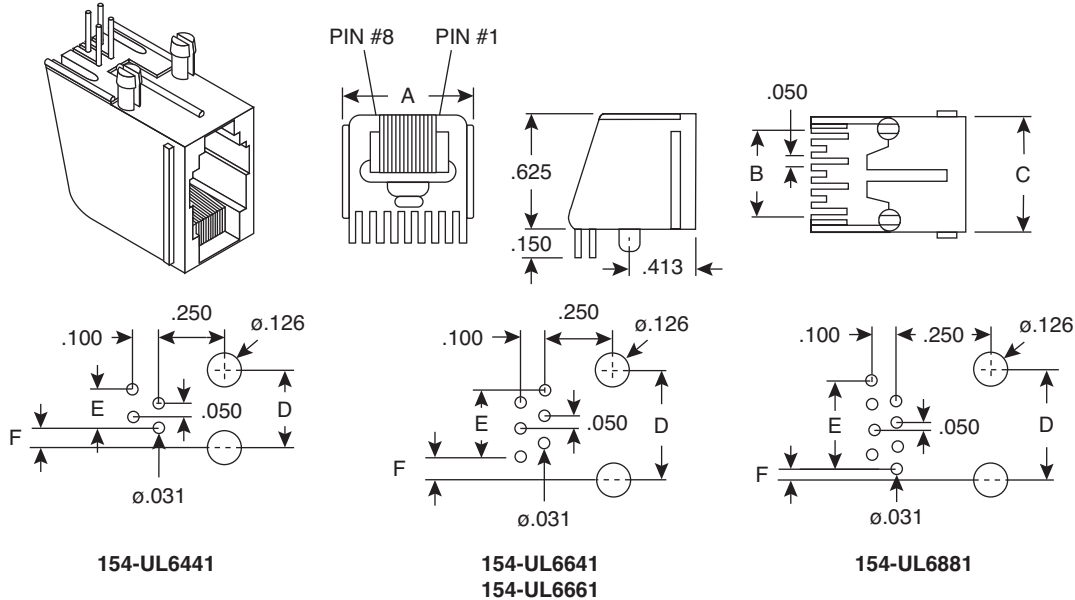

Dimensions: In.

| MOUSERSTOCK NO. | Dimensions (In) | | | | | |
|-----------------|-----------------|------|------|------|------|------|
| | A | B | C | D | E | F |
| 154-UL6441 | .540 | .150 | .440 | .300 | .150 | .075 |
| 154-UL6641 | .620 | .250 | .520 | .400 | .250 | .075 |
| 154-UL6661 | .620 | .250 | .520 | .400 | .250 | .075 |
| 154-UL6881 | .700 | .350 | .600 | .450 | .350 | .050 |

| SPECIFICATIONS | |
|------------------------|--|
| Type: | Flanged PCB Modular |
| Housing: | 25% Glass Filled Nylon |
| Contact: | 50μ Gold Over Nickel Plated, .014" Phosphor Bronze |
| Current Rating: | 1.5A |
| Voltage Rating: | 150V max. |
| Breakdown Voltage: | 500VAC for 1 Minute |
| Insulation Resistance: | 10MΩ |

Date Last Revised: 6/26/12

Available from Mouser Electronics
 1-800-346-6873
 www.mouser.com

KC-300616

154-UL6441, 154-UL6641, 154-UL6661, 154-UL6881