


PCB Modular Jack

154-UL6882



PCB Modular Jack

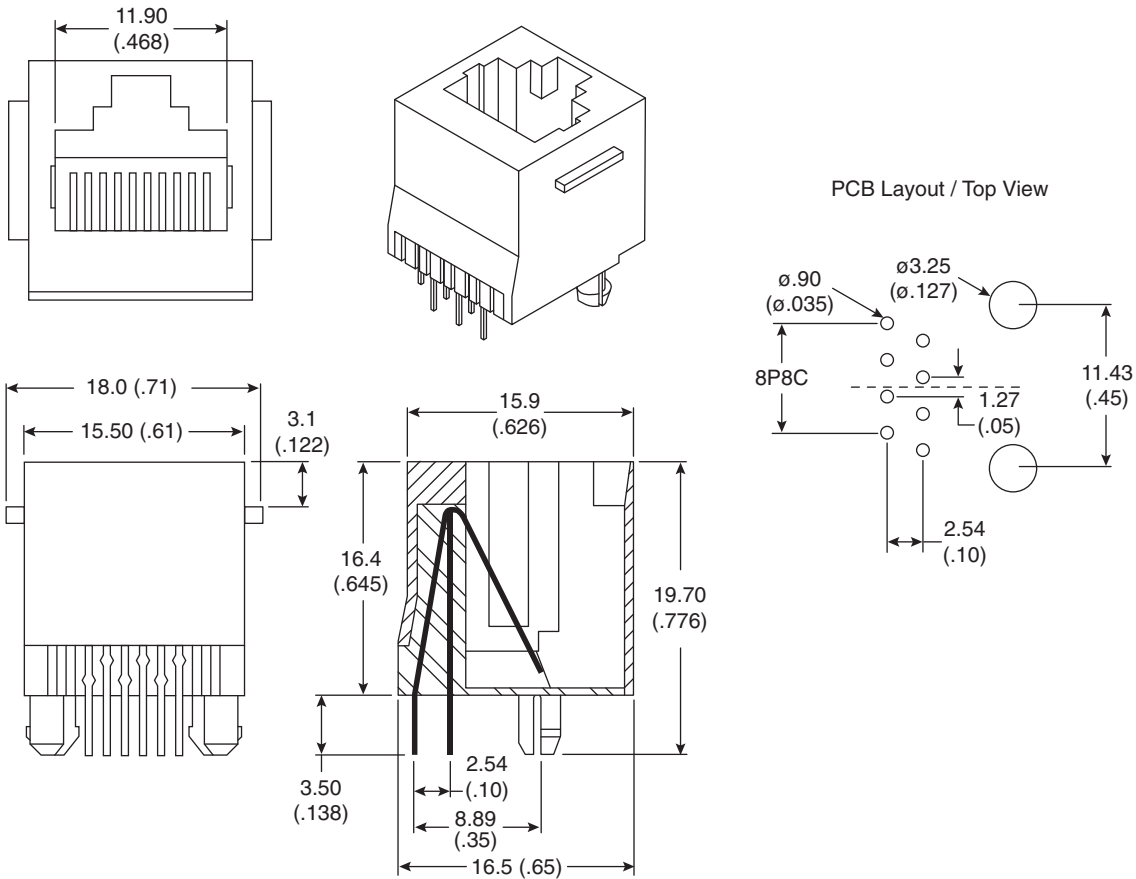

Dimensions: mm (in.)

SPECIFICATIONS	
Type:	8P8C modular with PCB leads
Rating:	125V, 1.5A
Dielectric withstand voltage:	1000VAC 60Hz
Contact resistance:	30m Ω max.
Insulation resistance:	500M Ω min.
Insertion force:	900g
Housing:	15% glass filled PBT, Black
Contacts:	0.35mm thickness phosphor bronze, gold plated over nickel on contact area, tin plated over nickel on solder area.
Temperature:	-40~80°C
Durability:	500 cycles min.

Date Last Revised: 6/1/10

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-300625

154-UL6882