


PLCC Socket

151-1534



PLCC Socket

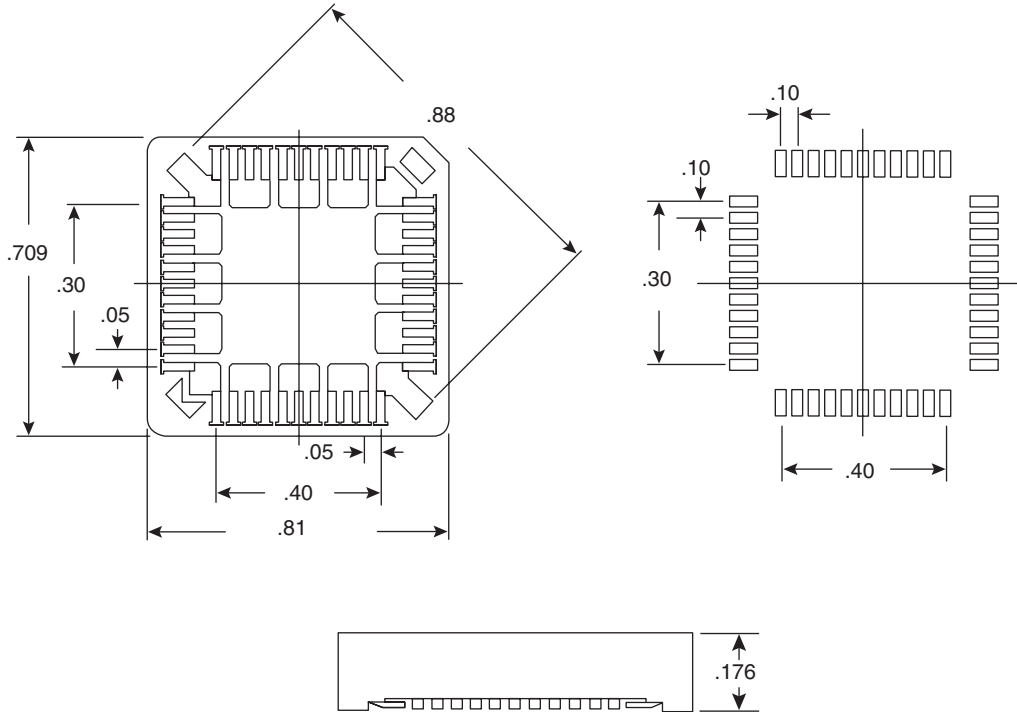

DIMENSIONS: in.

SPECIFICATIONS

| | |
|-------------------------------|----------------------|
| Type: | PLCC 32 Pin, SMT |
| Contact Resistance: | 30mΩ max. @ 100mA DC |
| Insulation Resistance: | 1000MΩ min. @ 500VDC |
| Current Rating: | 1A |
| Voltage Rating: | 500VAC for 1 Minute |
| Operating Temperature: | -65°C ~ +125°C |

MATERIALS

| | |
|------------------|----------------------------|
| Contacts: | Tin Plated Phosphor Bronze |
| Housing: | PPS & 40% Glass Fiber |

Date Last Revised: 8-14-12

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-300749

151-1534