






Terminal Blocks

158-P02ESK508V2-E, 158-P02ESK508V3-E



Terminal Blocks

158-P02ESK508V2-E, 158-P02ESK508V3-E

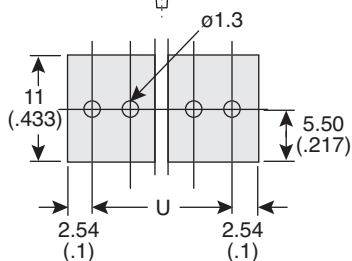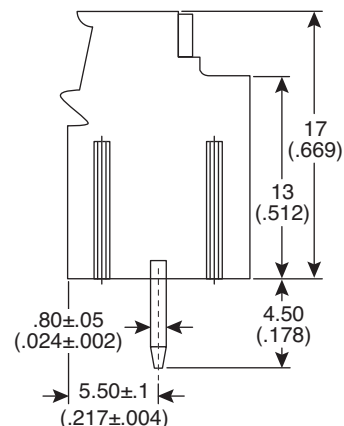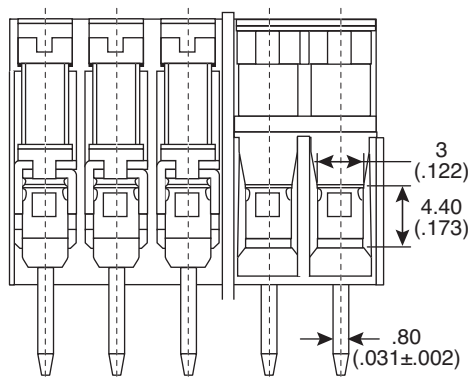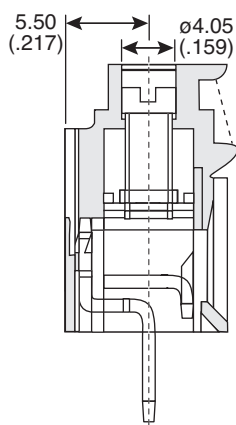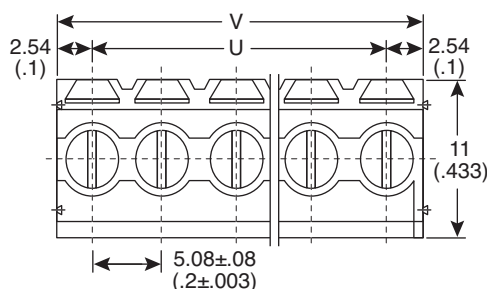

PCB Layout

Dimensions: mm (in.)

P	02P	03P
U	5.08	10.16
V	10.16	15.24

MATERIAL SPECIFICATIONS

Solder pin:	Copper, Tin plated
Screw:	Steel, Zinc plated
Wire cage:	Steel, Zinc plated
Housing:	PA66, Green
RoHS Compliant	

ELECTRICAL SPECIFICATIONS

Rating:	300V 23A
Pitch:	5.08 mm
Insulation withstand voltage:	2000V/Min.
Insulation resistance:	500MΩ or more at DC500V
Temperature range:	-40°C~+105°C
Screw torque value:	8kgf-cm (Max)
Electric wire:	AWG 26~12

Date Last Revised: 02-03-10

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC- 301119

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.