


**CORE DIMENSIONS:**

A	25.91 [1.020]	+	0.46 [.018]
B	13.06 [.514]	+	0.25 [.010]
C	28.58 [1.125]	+	0.64 [.025]
D	12.95 [.510]	+	0.18 [.007]

IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	130 Ω	280 Ω	440 Ω
Minimum	- Ω	224 Ω	- Ω

Z vs. FREQUENCY  
(REF. ONLY)

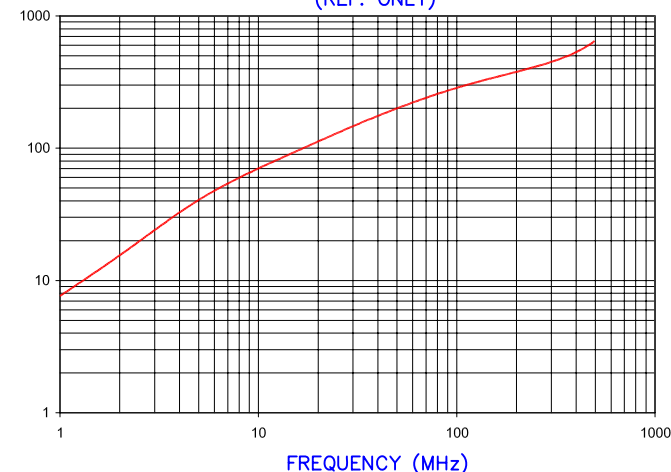


AGILENT E4991A Impedance/Material Analyzer  
HP 16092A-Test Fixture, REF 3158

**UNCONTROLLED DOCUMENT**

**NOTES:**

1. ASSEMBLED PART #: 28A2024-0A2
2. CASE COLOR: BLACK.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

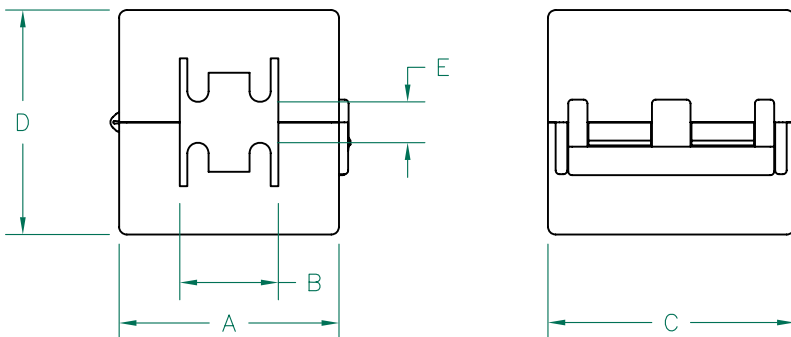

**CASE DIMENSIONS:**

A	29.00 [1.142]	+	REF.
B	13.00 [.512]	+	REF.
C	32.50 [1.280]	+	REF.
D	29.62 [1.166]	+	REF.
E	5.64 [.222]	+	REF.

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird TECHNOLOGIES®		
F	UPDATED NOTE 3	09/15/10	JUN					
E	UPDATE COMPANY LOGO ADD NOTES 3&4	01/27/09	JRK					
D	UPDATE 100 MHz MINIMUM VALUE CORRECT CASE DIM "B" TOLERANCE SYMBOL	06/07/07	TMB					
C	UPDATE COMPANY LOGO	04/18/07	TMB					
B	UPDATE "D" DIM ON CASE REVISE NOTES	08/24/06	TMB					
A	ORIGINAL DRAFT	06/29/04	JRK					
REV	DESCRIPTION	DATE	INT					
				PROJECT/PART NUMBER: <b>28A2024-0A2</b>		REV: <b>F</b>	PART TYPE: <b>FERRITE SNAP ON</b>	DRAWN BY: <b>JRK</b>
				DATE: 06/29/04		SCALE: NTS	MATERIAL: <b>NIzn FERRITE</b>	
				CAD # 28A2024-0A2-F		TOOL # -		