

MACOM

UHF Hybrid Junction 5 MHz-1 GHz

H-1-4


- Broad Frequency Range
- 0°-180° Hybrid with High Isolation

C-33

Guaranteed Specifications *

(From -55°C to +85°C)

Frequency Range	5 MHz-1 GHz
Isolation (A-B Ports)	50 dB Min 300 MHz-1 GHz 40 dB Min



Operating Characteristics


Dimensions in () are in mm.

Impedance	50 Ohms Nominal A & B Ports C & D Ports
Input Power	7 Watts Max Linear with Frequency (~45° @ 300 MHz)
Phase Shift (A to C or D)	Linear with Frequency (~45° @ 300 MHz)

Environmental
See Appendix for MIL-STD-883 screening option.

*All specifications apply with 50 ohm source and load impedance.
This product contains elements protected by United States Patent Number 3,311,650.

Functional Diagram





Ordering Information

Model No.	Package
H-1-4 BNC	Connectorized
H-1-4 N	Connectorized
H-1-4 SMA	Connectorized

Typical Performance

See Appendix for complete physical dimensions.

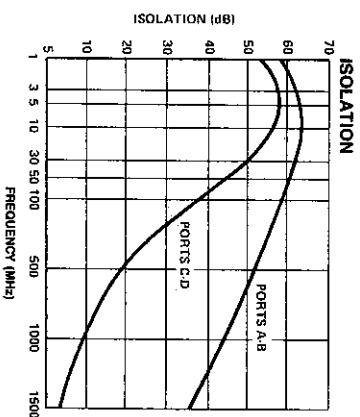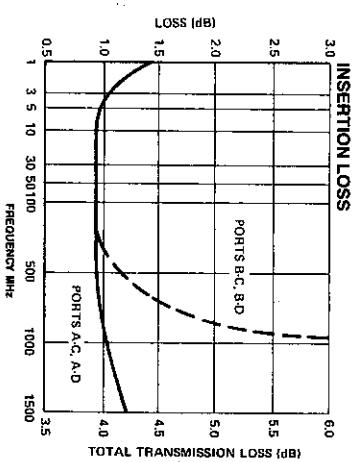

Specifications Subject to Change Without Notice.

MA-COM Inc. ■ 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Telephone: 800-366-2266

2-248

MA
HY
21

0°
3C
LC
Gu
Fro
Fret
Inse
Less

Isola

Ampl
VSW

Phas

Op
Imp
Inpu

Envl
See

All s
This p
Fu

OR

Mac
H-9
H-9

Spec
M/A