



### FEATURES

- Low Cost
- Multiple Package Styles
- Internal Input and Output
- Filtering
- Non-Conductive Case
- High Output Power Density:  
10 Watts/Inch<sup>3</sup>
- Extended Temperature Range:  
-25°C to +85°C
- Efficiency to 79%
- RoHS Compliant

The HPR1XXC Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XXC Series with high frequency isolation amplifiers.

Reduced parts count and high efficiency add to the reliability of the HPR1XXC Series. The high efficiency of the HPR1XXC Series means less internal power dissipation, as low as 190mW.

With reduced heat dissipation the HPR1XXC Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XXC Series means the series is able to offer greater than 10 W/inch<sup>3</sup> of output power density. Operation down to no load will not impact the reliability of the series, although a  $\geq 1$ mA minimum load is needed to realize published specifications.

The HPR1XXC Series provides the user a low cost converter without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

**As of October 2016, ONLY the following part numbers will be available: HPR100C; HPR105C; HPR107C; HPR116C; HPR117C; HPR118C**

**SPECIFICATIONS** All specifications are typical at  $T_A = +25^\circ\text{C}$  nominal input voltage unless otherwise specified.

### PRODUCT SELECTION CHART

	Model	Nominal Input Voltage	Rated Output Voltage	Rated Output Current	Input Current		Reflected Ripple Current	Efficiency	Recommended Alternatives
					No Load	Rated Load			
					mA				
Available	HPR100C	5	5	150	20	216	10	69	NMR100C / MER1S0505SC
Discontinued	HPR101C	5	12	62	20	212	5	70	NMR101C / MER1S0512SC
Discontinued	HPR102C	5	15	50	20	212	5	71	NMR102C / MER1S0515SC
Discontinued	HPR103C	5	$\pm 5$	$\pm 75$	20	218	5	68	NMA0505SC / MEA1D0505SC
Discontinued	HPR104C	5	$\pm 12$	$\pm 30$	20	212	5	68	NMA0512SC / MEA1D0512SC
Available	HPR105C	5	$\pm 15$	$\pm 25$	20	200	5	75	NMA0515SC / MEA1D0515SC
Discontinued	HPR106C	12	5	150	10	90	5	69	NMR106C / MER1S1205SC
Available	HPR107C	12	12	62	10	81	5	77	NMR107C / MER1S1212SC
Discontinued	HPR110C	12	$\pm 12$	$\pm 30$	10	81	5	74	NMA1212SC / MEA1D1212SC
Discontinued	HPR111C	12	$\pm 15$	$\pm 25$	10	81	5	77	NMA1215SC / MEA1D1215SC
Discontinued	HPR112C	15	5	150	8	72	5	69	MER1S1505SC
Discontinued	HPR113C	15	12	62	8	72	5	69	MER1S1512SC
Available	HPR116C	15	$\pm 12$	$\pm 30$	8	63	5	76	MEA1D1512SC
Available	HPR117C	15	$\pm 15$	$\pm 25$	8	63	5	79	MEA1D1515SC
Available	HPR118C	24	5	150	8	48	15	65	MER1S2405SC
Discontinued	HPR120C	24	15	50	8	45	15	76	MER1S2415SC
Discontinued	HPR122C	24	$\pm 12$	$\pm 30$	8	45	15	67	MEA1D2412SC
Discontinued	HPR123C	24	$\pm 15$	$\pm 25$	8	45	15	69	MEA1D2415SC
Discontinued	HPR108C	12	15	50	10	81	5	77	NMR108C / MER1S1215SC
Discontinued	HPR109C	12	$\pm 5$	$\pm 75$	10	88	5	71	NMA1205SC / MEA1D1205SC
Discontinued	HPR114C	15	15	50	8	72	5	69	MER1S1515SC
Discontinued	HPR115C	15	$\pm 5$	$\pm 75$	8	72	5	69	MEA1D1505SC
Discontinued	HPR119C	24	12	62	8	48	15	65	MER1S2412SC
Discontinued	HPR121C	24	$\pm 5$	$\pm 75$	8	45	15	69	MEA1D2405SC



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

### SPECIFICATIONS, ALL MODELS

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	<b>INPUT</b>					
	Voltage Range		4.5	5	5.5	VDC
			10.8	12	13.2	VDC
			13.5	15	16.5	VDC
		21.6	24	26.4	VDC	
	Voltage Rise Time See Typical Performance Curves & Application Notes: "Capacitive Loading Effects on Start-Up of DC/DC Converters"					
OUTPUT	<b>OUTPUT</b>					
	Rated Power				750	mW
	Voltage Setpoint Accuracy	Rated Load, Nominal $V_{IN}$			$\pm 5$	%
	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
		BW = 10Hz to 2MHz		30	40	mVrms
	Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5V$		4.75	7	VDC
		1mA to Rated Current, $V_{OUT} = 12V$		11.40	15	VDC
		1mA to Rated Current, $V_{OUT} = 15V$		14.25	18	VDC
	Temperature Coefficient			.01	.05	%/°C
	<b>REGULATION</b>					
Load Regulation (All other modes)	Rated Load to 1mA Load		3		%	
<b>GENERAL</b>						
<b>ISOLATION</b>						
Rated Voltage			750		VDC	
Test Voltage	60 Hz, 10 Seconds		750		Vrms	
Resistance			10		GΩ	
Capacitance				25	100	pF
Leakage Current	$V_{ISO} = 240VAC, 60Hz$			2	8.5	μArms
Switching Frequency				170		kHz
Frequency Change	Over Line and Load			24		%
Package Weight					3	g
MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method					
Ground Benign	$T_A = +25^\circ\text{C}$		7.9			MHr
Fixed Ground	$T_A = +35^\circ\text{C}$		1.9			MHr
Naval Sheltered	$T_A = +35^\circ\text{C}$		1.2			MHr
Airborne Uninhabited Fighter	$T_A = +35^\circ\text{C}$		300			kHr
<b>TEMPERATURE</b>						
Specification			-25	+25	+85	°C
Operation			-40		+100	°C
Storage			-40		+110	°C

### SOLDERING INFORMATION









The HPR1XXC devices are intended for wave soldering or manual soldering.

**They are not intended to be subject to surface mount processes under any circumstances.**




The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of  $260^\circ\text{C}$  for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed  $175^\circ\text{C}$ . Care should be taken to control manual soldering limits identical to that of wave soldering.

**TYPICAL PERFORMANCE CURVES**

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage and nominal load.

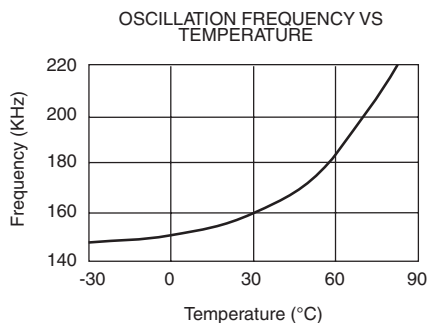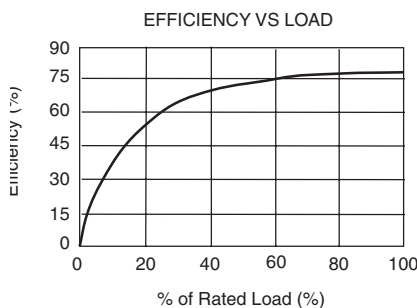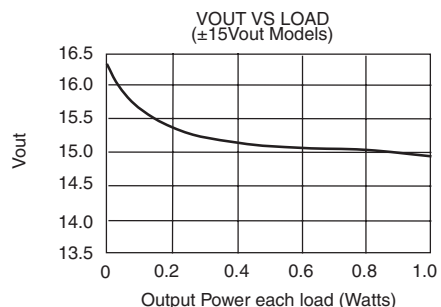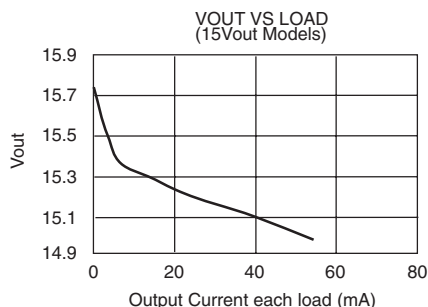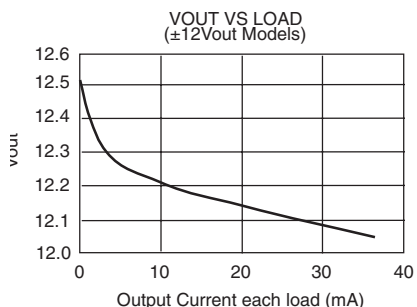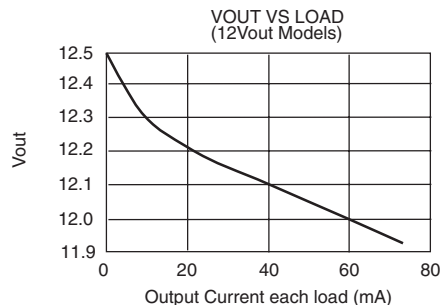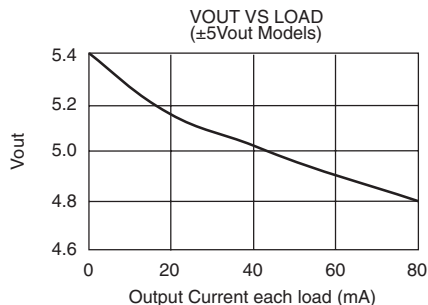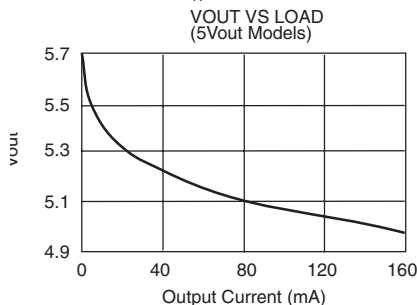

**SAFE OPERATING AREA**

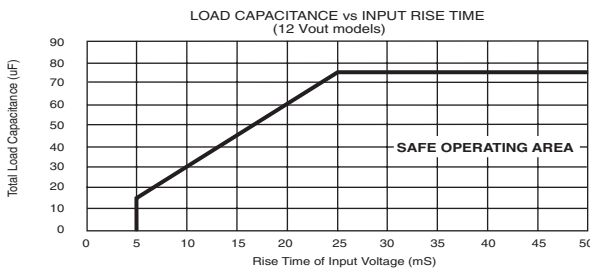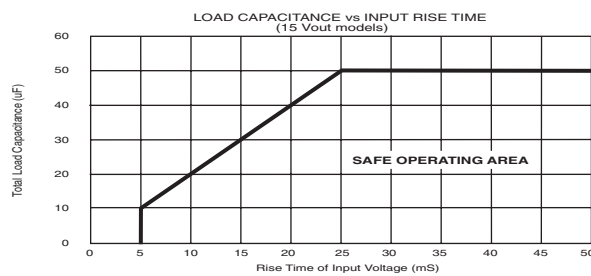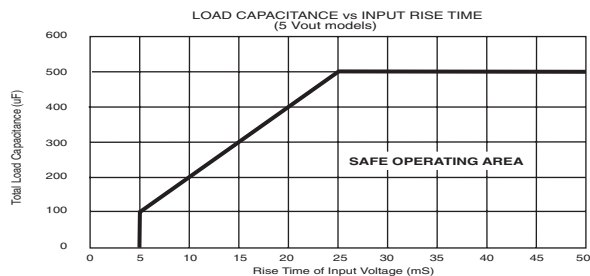

**NOTES:**

- 1.) When operated within the SAFE OPERATING AREA as defined by the above curves, the output voltage of HPR1XXC devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

