

## Advantages of a Full Featured 700 Series Relay

Since the launch of the 700 series relays in 2000, this product line has continuously evolved both functionally and visually. The 700 series product line has the perfect mix of historical Magnecraft relay quality combined with a dynamic arsenal of options. When mated with the Magnecraft sockets and accessories, these RoHs compliant relays provide a complete modular system that will meet all your plug-in relay requirements in a package that is both visually appealing and functionally outstanding.

- Offers a “one stop solution” for your power management system.
- Several Contact configurations and materials to meet your individual needs.
- Plug-In switching capabilities from 10 mA to 20 Amps.
- Several Feature Code and Operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.



### Removable Lock-Down Door

When Activated, Locks Push Button and Contacts in the Powered Position.

### Color-Coded Push Button


Allows Manual Operation of Relay.  
AC Coils Red or DC Coils Blue.

### Finger Grip Cover

Easy Removal of Relay from Socket.

### Gold Flashed Contacts

Prevents Premature Oxidation and Increases Shelf-life.



### Contact Viewing Window

Shows Position of Contacts.

### Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.



### Slim Design

Minimizes Space on DIN Rail.

### Module Compatible


Allows for Optional Protection or LED Modules to be Used With Sockets.



### 2-Way Side or DIN Rail Mounting System

Retrofits Existing Panel Mounting and 35mm DIN Rail.

# The Complete System Solution!

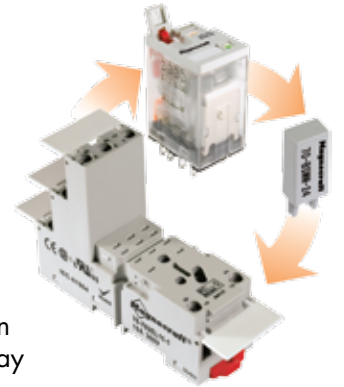

**Flag Indicator**  
Shows Relay Status in Manual or Powered Condition.



**Bi-Polar LED Status Lamp**  
Shows Coil "ON" or "OFF" Status.

**I.D. Tag/Write-On Plastic Label**  
Used for Identification of Relays in Multi-Relay Circuits.

**Mating Hold-Down Clip Available**  
Safely Secures Relay to Socket.



**Finger-Safe**  
Protects Operators from Live Circuits.

**I.D. Tag/Write-On Plastic Label**  
Used to Match Wire Identification Tags with Socket Connections.

**Internal Coil Bus Jumper System**  
Allows Connection to Adjacent Sockets Without Additional Wiring.



## Advantages of a Plain Cover 700 Series Relay

The Plain Cover Super Series relays support budget minded applications with premium performance. Maintaining the same ratings and internal components as the Full Feature Series; the Plain Cover Series perform as well as premium relays while maintaining low costs by offering several option configurations.

- Offers a “one stop solution” for your power management system.
- Several Contact configurations and materials to meet your individual needs.
- Plug-In switching capabilities from 10 mA to 20 Amps.
- Several Feature Code and Operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.



**Contact Viewing Window**  
Shows Position of Contacts.

**Gold Flashed Contacts**  
Prevents Premature Oxidation and Increases Shelf-life.

**Isolated Input and Output Terminals**  
Separates Control Circuits from Load Circuits.



**Slim Design**  
Minimizes Space on DIN Rail.

**Module Compatible**  
Allows for Optional Protection or LED Modules to be Used With Sockets.



**2-Way Side or DIN Rail Mounting System**  
Retrofits Existing Panel Mounting and 35mm DIN Rail.

**Finger Grip Cover**  
Easy Removal of Relay from Socket.

# The Complete System Solution!

**Flag Indicator**  
Shows Relay Status in Manual or Powered Condition.




**Optional Bi-Polar LED Status Lamp**  
Shows Coil "ON" or "OFF" Status.

**I.D. Tag/Write-On Plastic Label**  
Used for Identification of Relays in Multi-Relay Circuits.


**Mating Hold-Down Clip Available**  
Safely Secures Relay to Socket.



**Finger-Safe**  
Protects Operators from Live Circuits.

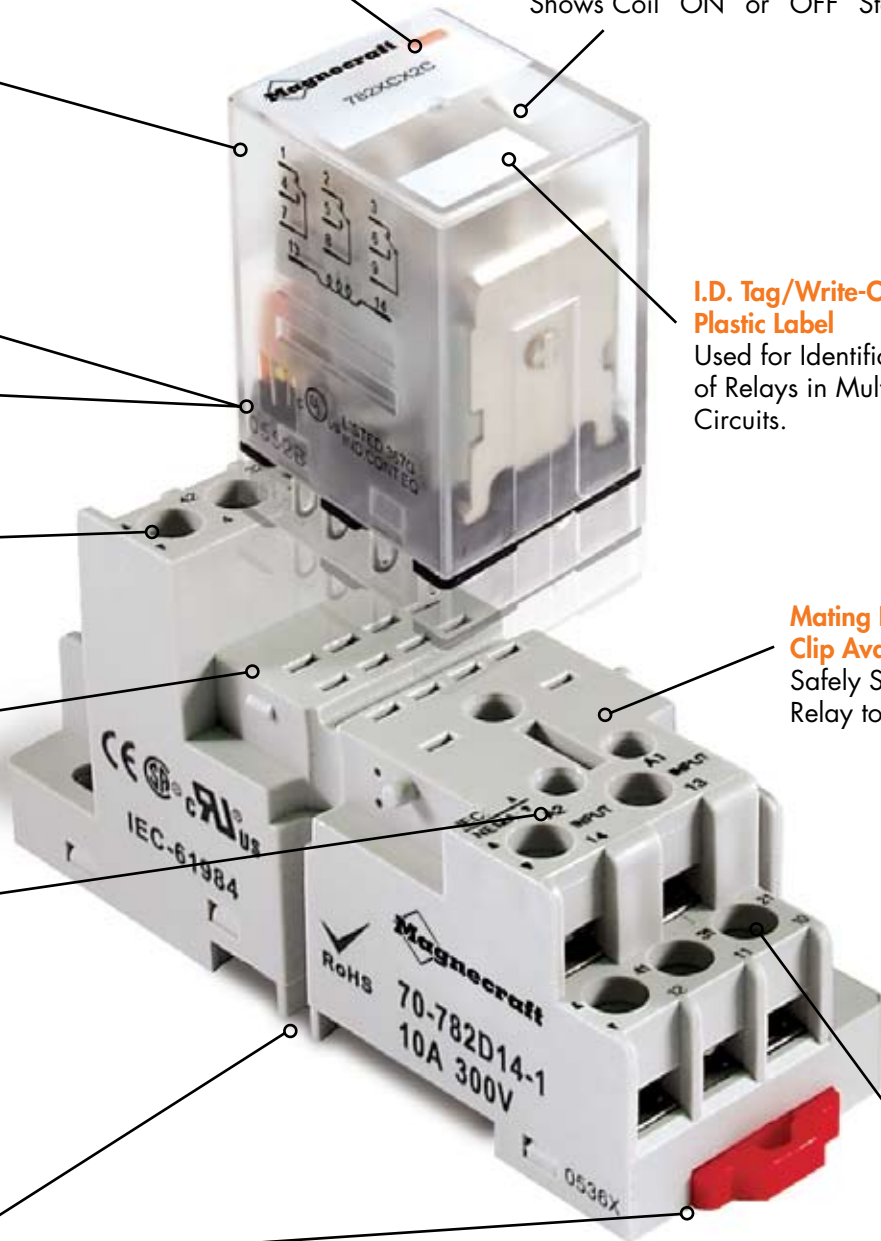

# 782 Ice Cube Relays/3PDT, 3-10 Amp Rating (DC & AC)

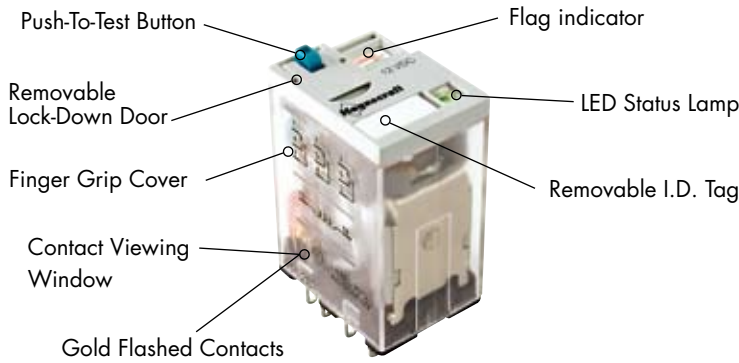


## General Specifications

(UL 508)

782XCX2


Contact Characteristics		Units	Standard
Number and type of Contacts			3PDT
Contact materials			Silver Alloy
Thermal (Carrying) Current		A	10
Maximum Switching Voltage		V	300
Switching Current @ Voltage	~	Resistive	10A @ 120V 50/60Hz
	~	Resistive	8A @ 277V 50/60Hz
	~	Resistive	8A @ 28V
	~	HP	1/3 @ 120VAC
	~	HP	1 @ 277 VAC
Minimum Switching Requirement		Pilot Duty	B300
		mA	100 @ 5VDC (.5W)
Coil Characteristics			
Voltage Range		~	V
		~	V
Operating Range	% of Nominal	~	85% to 110%
		~	80% to 110%
Average consumption		~	VA
Drop-out voltage threshold		~	W
		~	15%
		~	10%
Performance Characteristics			
Electrical Life (UL508)	Operations @ Rated Current	(Resistive)	200,000
Mechanical Life	Unpowered		10,000,000
Operating time (response time)			ms
Dielectric strength	Between coil and contact	~	V(rms)
	Between poles	~	V(rms)
	Between contacts	~	V(rms)
			1500
			1500
			1500
Environment			
Product certifications	Standard version		UL, CSA, CE
Ambient air temperature around the device	Storage		°C
	Operation		°C
Vibration resistance	Operational		g-n
Shock resistance			g-n
Degree of protection			IP 40
Weight		grams	36

### 782XCX2




**Wiring Diagram**  
Bottom View

### Full Featured Dimensions

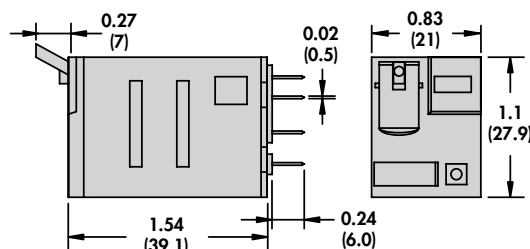

### Plain Cover Dimensions

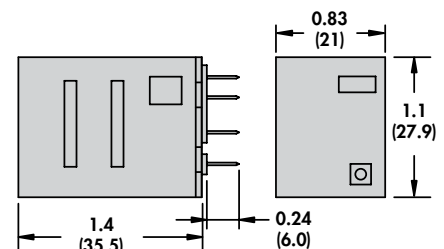





Full Featured

**NEW**  
**NEW**  
**NEW**  
**NEW**  
**NEW**



Plain Cover

**Standard Part Numbers**

**BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED**

Nominal Voltage	Coil Resistance	3PDT Part Number (Full Feature) 10 Amp	3PDT Part Number (Plain Cover) 10 Amp
AC Operated			
6 VAC 50/60 Hz	9.6 Ohms	<b>782XCX2M4L-6A</b>	<b>782XCX2C-6A</b>
12 VAC 50/60 Hz	46 Ohms	<b>782XCX2M4L-12A</b>	<b>782XCX2C-12A</b>
24 VAC 50/60 Hz	180 Ohms	<b>782XCX2M4L-24A</b>	<b>782XCX2C-24A</b>
120 VAC 50/60 Hz	4430 Ohms	<b>782XCX2M4L-120A</b>	<b>782XCX2C-120A</b>
220-230 VAC 50/60 Hz	15000 Ohms	<b>782XCX2M4L-220/230A</b>	<b>782XCX2C-220/230A</b>
240 VAC 50/60 Hz	15720 Ohms	<b>782XCX2M4L-240A</b>	<b>782XCX2C-240A</b>
DC Operated			
6 VDC	40 Ohms	<b>782XCX2M4L-6D</b>	<b>782XCX2C-6D</b>
12 VDC	160 Ohms	<b>782XCX2M4L-12D</b>	<b>782XCX2C-12D</b>
24 VDC	650 Ohms	<b>782XCX2M4L-24D</b>	<b>782XCX2C-24D</b>
48 VDC	2600 Ohms	<b>782XCX2M4L-48D</b>	<b>782XCX2C-48D</b>
110-125 VDC	11000 Ohms	<b>782XCX2M4L-110/125D</b>	<b>782XCX2C-110/125D</b>

**Custom Relay Part Number Builder**

Series	Contact Config.	Contact Code	Cover Options	Terminal Style	Feature Options	Coil Voltage
782	XCX	2	C	T	M4L-	240A
782	XCX = 3PDT	10 Amp Silver Alloy = 2	Full Feature = No Code Plain Cover = C	Plug In = No Code PC terminal = T	Side Push Button = M Locking Push Button = M4 Bi-Polar LED = L	VAC = 6 - 240A VDC = 6 - 125D

**Relay Adapters**



**16-782PC-1**  
Metal Hold-Down Clip  
Section 3, p.8-11

**16-782C1**  
Section 3, p.14-16



**16-782C**  
Section 3, p.14-16

