



### ■ Features :

- 3 stage charging
- AC 115/230VAC selected by switch
- Built-in passive PFC function compliance to EN61000-3-2 Class A (option)
- Protection: Short circuit / Reverse polarity / Over voltage / Over temperature
- Cooling by free air convection
- Charger for lead-acid batteries
- 2 color LED loading indicator
- Low cost, High reliability
- 3 years warranty




|   |                        |   |
|---|------------------------|---|
| PB - 300 <span style="border: 1px solid black; padding: 2px;">P</span> - 12 |                        |   |
| P: With Passive PFC   | N: Without Passive PFC | <b>12:14.4V</b><br><b>24:28.8V</b><br><b>48:57.6V</b> |

### SPECIFICATION

| MODEL                                | PB-300 <span style="border: 1px solid black; padding: 2px;"> </span> -12   | PB-300 <span style="border: 1px solid black; padding: 2px;"> </span> -24                                    | PB-300 <span style="border: 1px solid black; padding: 2px;"> </span> -48 |                             |
|--------------------------------------|--|---|--|-----------------------------|
| OUTPUT                               | BOOST CHARGE VOLTAGE   | 14.4V   | 28.8V  | 57.6V                       |
|                                      | FLOAT CHARGE VOLTAGE   | 13.6V   | 27.2V  | 54.4V                       |
|                                      | VOLTAGE ADJUSTABLE RANGE   | 13 ~ 14.7V  | 26 ~ 28.8V   | 52 ~ 58.6V                  |
|                                      | RECOMMENDED BATTERY CAPACITY (AMP HOURS) <small>Note 5</small>   | 60 ~ 200Ah  | 30 ~ 100Ah   | 15 ~ 50Ah                   |
|                                      | BATTERY TYPE   | Open & Sealed Lead Acid   |  |                             |
|                                      | MAX. OUTPUT CURRENT (Typ.) <small>Note 7</small>   | 20.85A  | 10.5A  | 5.3A                        |
|                                      | CONTINUOUS OUTPUT CURRENT (Typ.) <small>Note 6</small>   | 12.5A   | 6.25A  | 3.2A                        |
| INPUT                                | VOLTAGE RANGE  | 90 ~ 132VAC / 180 ~ 264VAC selected by switch   |  | 127 ~ 187VDC / 254 ~ 370VDC |
|                                      | FREQUENCY RANGE  | 47 ~ 63Hz   |  |                             |
|                                      | POWER FACTOR (Typ.)  | >0.65 (with P type) at 230VAC   |  |                             |
|                                      | EFFICIENCY (Typ.)  | 85%   | 86%  | 88%                         |
|                                      | AC CURRENT (Typ.)  | 6A/115VAC   | 3A/230VAC  |                             |
|                                      | INRUSH CURRENT (Typ.)  | COLD START 60A  |  |                             |
|                                      | LEAKAGE CURRENT  | <3.5mA / 240VAC   |  |                             |
| PROTECTION                           | SHORT CIRCUIT  | O/P Built in fuse (FS100) to protect short circuit condition, shut down o/p voltage and can not re-power on |  |                             |
|                                      | REVERSE POLARITY   | By internal fuse  |  |                             |
|                                      | OVER VOLTAGE   | 16 ~ 18V  | 31 ~ 35V   | 59 ~ 64V                    |
|                                      | OVER TEMPERATURE   | Protection type : Shut down o/p voltage, re-power on to recover   |  |                             |
| FUNCTION                             | REMOTE CONTROL (CN5)   | Open: Normal work    Short: Stop Charging   |  |                             |
| ENVIRONMENT                          | WORKING TEMP.  | -10 ~ +50°C (Refer to "Derating Curve")   |  |                             |
|                                      | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |  |                             |
|                                      | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C , 10 ~ 95% RH   |  |                             |
|                                      | TEMP. COEFFICIENT  | ±0.05%/°C (0 ~ 45°C )   |  |                             |
|                                      | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes  |  |                             |
| SAFETY & EMC <small>(Note 4)</small> | SAFETY STANDARDS   | IEC60335-2-29 CB approved by TUV(except for 48V), UL60950-1 approved  |  |                             |
|                                      | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC   | I/P-FG:2KVAC   | O/P-FG:0.5KVAC              |
|                                      | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |  |                             |
|                                      | EMC EMISSION   | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3 (only P type)                                       |  |                             |
|                                      | EMC IMMUNITY   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, light industry level, criteria A                           |  |                             |
| OTHERS                               | MTBF   | 115.8Khrs min.    MIL-HDBK-217F (25°C )   |  |                             |
|                                      | DIMENSION  | 253*135*48.5mm(L*W*H)   |  |                             |
|                                      | PACKING  | 1.45Kg; 6pcs/9.7Kg/0.95CUFT   |  |                             |
| NOTE                                 | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> <li>5. This is Mean Well's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.</li> <li>6. Test condition is at 25°C, charging current will change under different temperature.</li> <li>7. Maximum charging current will be in the range of 90~110% rated output current.</li> </ol> |   |  |                             |

**Mechanical Specification**

Case No.801B Unit:mm

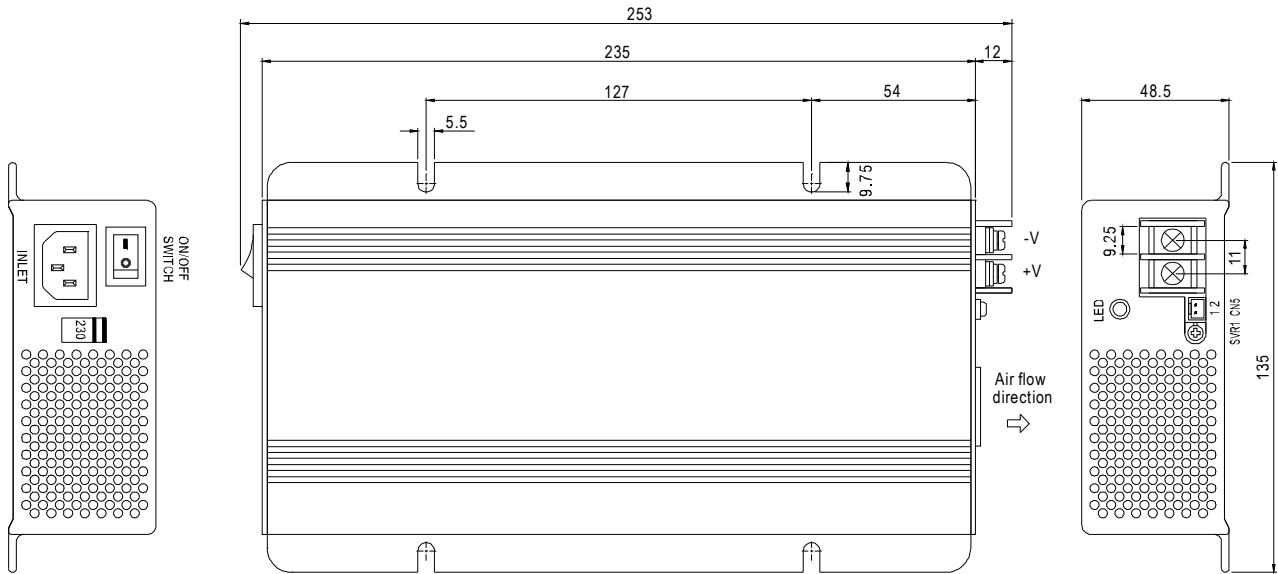


Remote Control(CN5) : JST B2B-XH or equivalent


| Assignment                  | Mating Housing        | Terminal                        |
|-----------------------------|-----------------------|---------------------------------|
| PIN1,2 Open: Normal work    | JST XHP or equivalent | JST SXH-001T-P0.6 or equivalent |
| PIN1,2 Short: Stop Charging |                       |                                 |

**Block Diagram**

fosc : 70KHz

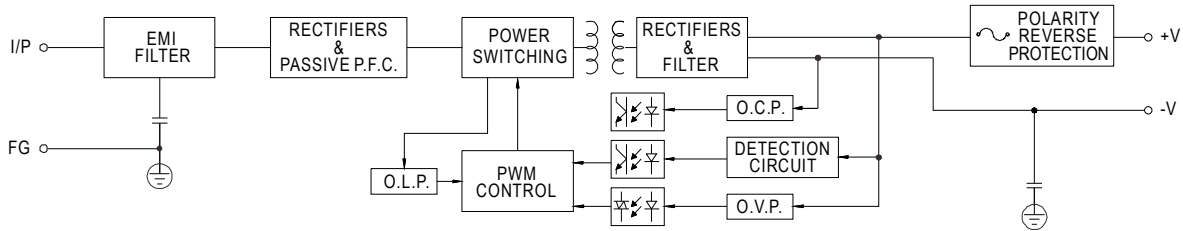

**Charging Curve**

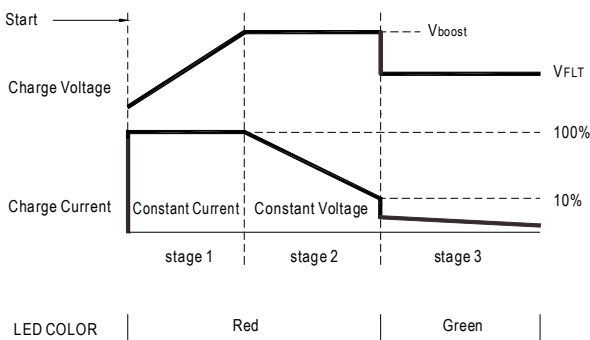

| State  | PB-300-12 | PB-300-24 | PB-300-48 |
|--------|-----------|-----------|-----------|
| Vboost | 14.4V     | 28.8V     | 57.6V     |
| VFLT   | 13.6V     | 27.2V     | 54.4V     |

**Output Load VS Temperature**

