




■ Features :

- True sine wave output (THD<3%)
- High surge power up to 6000W
- High efficiency up to 92%
- Power ON-OFF switch
- Standby saving mode can be selectable
- Front panel indicator for operation status
- Thermostatically controlled cooling fan
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input polarity reverse / Overload / AC circuit breaker
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- Optional monitoring software and connection cable (MW order No.: DS-TN-1500)
- 3 years warranty



**SPECIFICATION**

| MODEL                    | TS-3000-112   | TS-3000-124 | TS-3000-148   | TS-3000-212 | TS-3000-224  | TS-3000-248   |            |            |
|--------------------------|---|-------------|---|-------------|--|---|------------|------------|
| OUTPUT                   | RATED POWER (Typ.)  |             | 3000W   |             |  |   |            |            |
|                          | MAXIMUM OUTPUT POWER (Typ.)   |             | 3450W for 180 sec. / 4500W for 10 sec. / surge power 6000W for 30 cycles  |             |  |   |            |            |
|                          | AC VOLTAGE  |             | Factory setting set at 110VAC<br>100 / 110 / 115 / 120VAC selectable by setting button S.W                                    |             | Factory setting set at 230VAC<br>200 / 220 / 230 / 240VAC selectable by setting button S.W |   |            |            |
|                          | FREQUENCY   |             | 60 ± 0.1Hz 50/60Hz selectable by setting button S.W   |             | 50 ± 0.1Hz 50/60Hz selectable by setting button S.W  |   |            |            |
|                          | WAVEFORM <small>Note.7</small>  |             | True sine wave (THD<3%)   |             |  |   |            |            |
|                          | AC REGULATION (Typ.)  |             | ± 3%  |             |  |   |            |            |
|                          | SAVING MODE (Typ.)  |             | Default disabled. Load ≤ 5W will be changed to standby mode   |             |  |   |            |            |
|                          | FRONT PANEL INDICATOR   |             | Battery voltage level, output load level, saving mode, fault and operation status   |             |  |   |            |            |
| INPUT                    | BAT. VOLTAGE  |             | 12V   | 24V         | 48V  | 12V   | 24V        | 48V        |
|                          | VOLTAGE RANGE (Typ.) <small>Note.3,6</small>  |             | 10.5 ~ 15VDC  | 21 ~ 30VDC  | 42 ~ 60VDC   | 10.5 ~ 15VDC  | 21 ~ 30VDC | 42 ~ 60VDC |
|                          | DC CURRENT (Typ.) <small>Note.4</small>   |             | 300A  | 150A        | 75A  | 300A  | 150A       | 75A        |
|                          | NO LOAD DISSIPATION (Typ.)  |             | ≤ 10W @ standby saving mode   |             |  |   |            |            |
|                          | OFF MODE CURRENT DRAW (Typ.)  |             | ≤ 1mA   |             |  |   |            |            |
|                          | EFFICIENCY (Typ.) <small>Note.1</small>   |             | 88%   | 90%         | 91%  | 89%   | 91%        | 92%        |
| BATTERY INPUT PROTECTION | FUSE  |             | 40A*12  | 40A*6       | 20A*6  | 40A*12  | 40A*6      | 20A*6      |
|                          | BAT. LOW ALARM <small>Note.6</small>  |             | 11.3V   | 22.5V       | 45V  | 11.3V   | 22.5V      | 45V        |
|                          | BAT. LOW SHUTDOWN <small>Note.6</small>   |             | 10.5V   | 21V         | 42V  | 10.5V   | 21V        | 42V        |
|                          | REVERSE POLARITY  |             | By internal fuse open   |             |  |   |            |            |
| OUTPUT PROTECTION        | OVER TEMPERATURE  |             | 90°C ± 5°C  | 85°C ± 5°C  | 85°C ± 5°C   | 80°C ± 5°C  | 75°C ± 5°C | 75°C ± 5°C |
|                          | OUTPUT SHORT  |             | Protection type : Shut down o/p voltage, re-power on to recover   |             |  |   |            |            |
|                          | OVER LOAD (Typ.)  |             | 105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.<br>Protection type : Shut down o/p voltage, re-power on to recover |             |  |   |            |            |
|                          | CIRCUIT BREAKER   |             | AC output receptacle:15A  |             |  |   |            |            |
|                          | GFCI PROTECTION   |             | Optional (Only type F)  |             |  | None  |            |            |
| ENVIRONMENT              | WORKING TEMP. <small>Note.2</small>   |             | 0 ~ +40°C @ 100% load ; 60°C @ 50% load   |             |  |   |            |            |
|                          | WORKING HUMIDITY  |             | 20% ~ 90% RH non-condensing   |             |  |   |            |            |
|                          | STORAGE TEMP., HUMIDITY   |             | -30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH   |             |  |   |            |            |
|                          | VIBRATION   |             | 10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes  |             |  |   |            |            |
| SAFETY & EMC             | SAFETY STANDARDS  |             | UL458 (only for Type G)   |             | None   |   |            |            |
|                          | LVD   |             | None  |             |  | EN60950-1   |            |            |
|                          | WITHSTAND VOLTAGE   |             | Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC  |             |  |   |            |            |
|                          | ISOLATION RESISTANCE  |             | Bat I/P - AC O/P, Bat I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25°C / 70% RH   |             |  |   |            |            |
|                          | EMC EMISSION  |             | Compliance to FCC class A   |             |  | Compliance to EN55022 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark |            |            |
| EMC IMMUNITY             |   | None        |   |             | Compliance to EN61000-4-2,3,4,5,6,8,11   |   |            |            |
| OTHERS                   | CONTROL WIRING  |             | RJ11 -RS232 (Option)  |             |  |   |            |            |
|                          | DIMENSION   |             | 466.8*283.5*100mm (L*W*H)   |             |  |   |            |            |
|                          | PACKING   |             | 12.9Kg; 1pcs/14Kg/1.98CUFT  |             |  |   |            |            |
| NOTE                     | <p>1.Efficiency is tested by 2100W, linear load at 13V, 26V, 52V input voltage.<br/>                 2.Output derating capacity referenced by curve 1.<br/>                 3.Input derating capacity referenced by curve 2.<br/>                 4.DC current is tested by 3000W, linear load at 12V, 24V, 48V input voltage.<br/>                 5.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting.<br/>                 6.The tolerance of each voltage value by models is:112/212→±0.5V;124/224→±1V;148/248→±2V<br/>                 7.THd is tested by 3000W, linear load at 13,26,52V input voltage.</p> |             |   |             |  |   |            |            |

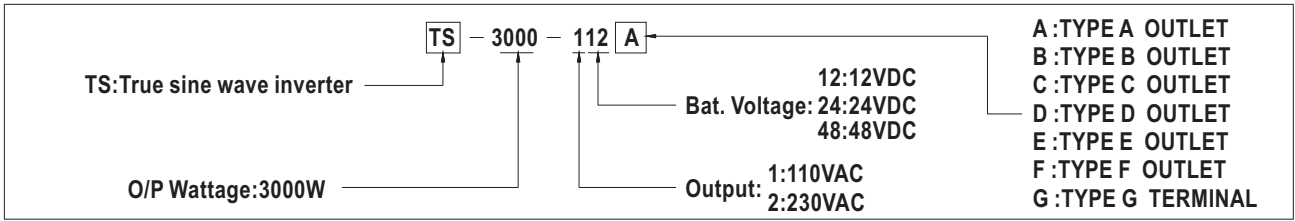

**AC Output Receptacle (optional)**

| Receptacle type |        |        |           |        |        |        |                 |
|-----------------|--------|--------|-----------|--------|--------|--------|-----------------|
|                 | TYPE-A | TYPE-B | TYPE-C    | TYPE-D | TYPE-E | TYPE-F | (Terminal only) |
| Country         | USA    | EUROPE | AUSTRALIA | U.K    | JAPAN  | GFCI   | ----            |
| Certificate     |        |        |           |        |        |        |                 |

**Mechanical Specification**

Unit:mm

**Derating Curve**

**CURVE 1**

**CURVE 2**

**Type-A**

**Type-B**

Note: When the load current is >15A, must use output terminal connection which can be found inside the AC output panel of the inverter.