

■ Features :

- Universal AC input / Full range
- No load power consumption < 0.3W
- Energy efficiency Level V
- Comply with EU ErP
- 2 pole EURO plug
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- 2 years warranty






SPECIFICATION

| ORDER NO. | GS36E05-P1J | GS36E09-P1J | GS36E12-P1J | GS36E24-P1J | GS36E48-P1J | |
|---------------------------------------|---|---|-------------|-------------|-------------|-----------|
| OUTPUT | SAFETY MODEL NO. | GS36E05 | GS36E09 | GS36E12 | GS36E24 | GS36E48 |
| | DC VOLTAGE <small>Note.2</small> | 5V | 9V | 12V | 24V | 48V |
| | RATED CURRENT | 4.5A | 3.5A | 3A | 1.5A | 0.75A |
| | CURRENT RANGE | 0 ~ 4.5A | 0 ~ 3.5A | 0 ~ 3A | 0 ~ 1.5A | 0 ~ 0.75A |
| | RATED POWER (max.) | 22.5W | 31.5W | 36W | 36W | 36W |
| | RIPPLE & NOISE (max.) <small>Note.3</small> | 90mVp-p | 90mVp-p | 100mVp-p | 180mVp-p | 240mVp-p |
| | VOLTAGE TOLERANCE <small>Note.4</small> | ±5.0% | ±5.0% | ±3.0% | ±2.0% | ±2.0% |
| | LINE REGULATION <small>Note.5</small> | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| | LOAD REGULATION <small>Note.6</small> | ±5.0% | ±5.0% | ±3.0% | ±2.0% | ±2.0% |
| SETUP, RISE, HOLD UP TIME | 1000ms, 20ms, 15ms/230VAC 1000ms, 20ms, 15ms/115VAC at full load | | | | | |
| INPUT | VOLTAGE RANGE | 90 ~ 264VAC 135 ~ 370VDC | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | |
| | EFFICIENCY (Typ.) | 76.5% | 81.5% | 84.5% | 85.5% | 87.5% |
| | AC CURRENT | 0.7A / 100VAC | | | | |
| | INRUSH CURRENT (max.) | 60A / 230VAC | | | | |
| LEAKAGE CURRENT(max.) | 0.25mA / 240VAC | | | | | |
| PROTECTION | OVERLOAD | 110 ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | |
| | OVER VOLTAGE | 105 ~ 135% rated output voltage Protection type : Clamp by zener diode | | | | |
| ENVIRONMENT | WORKING TEMP. | -20 ~ +50°C (Refer to "Derating Curve") | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | |
| | STORAGE TEMP., HUMIDITY | -20 ~ +85°C, 10 ~ 95% RH | | | | |
| | TEMP. COEFFICIENT | ±0.03% / °C (0 ~ 40°C) | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | |
| SAFETY & EMC <small>(Note. 7)</small> | SAFETY STANDARDS | TUV EN60950-1 approved | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:4242VDC | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | | | |
| | EMC EMISSION | Compliance to EN55022 class B, EN61000-3-2,3 | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A | | | | |
| OTHERS | MTBF | 692.3Khrs min. MIL-HDBK-217F(25°C) | | | | |
| | DIMENSION | 79*54*33mm (L*W*H) | | | | |
| | PACKING | 226g ; 60pcs / 15.5kg / CARTON | | | | |
| CONNECTOR | PLUG | See page 2 ; Other type available by customer requested | | | | |
| | CABLE | See page 2 ; Other type available by customer requested | | | | |
| NOTE | <p>1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient.</p> <p>2.DC voltage: The output voltage set at point measure by plug terminal & 50% load.</p> <p>3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.</p> <p>4.Tolerance: includes set up tolerance, line regulation, load regulation.</p> <p>5.Line regulation is measured from low line to high line at rated load.</p> <p>6.Load regulation is measured from 20% to 100% rated load.</p> <p>7.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> | | | | | |

■ Mechanical Specification

Unit:mm

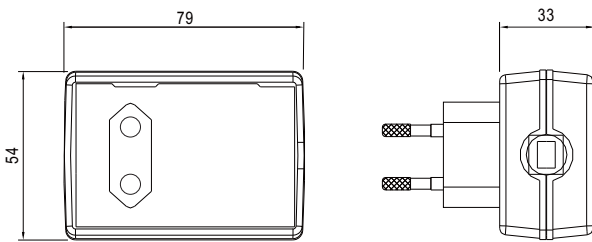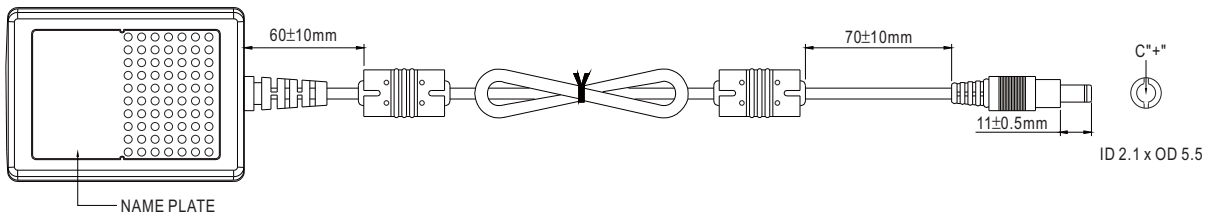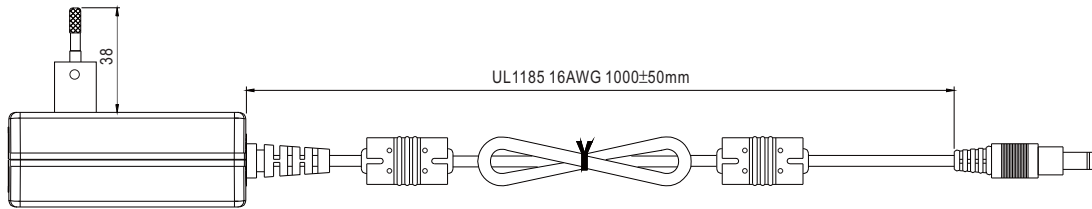


■ Plug Assignment

Standard plug: P1J

| P1J | |
|--------|--------|
| P/N | OUTPUT |
| CENTER | + |

■ Derating Curve

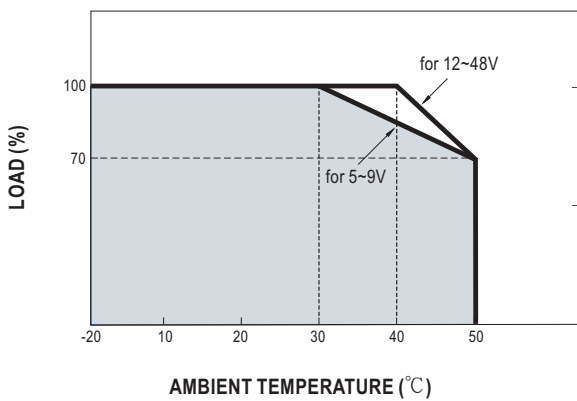

■ Static Characteristics

