


# Woodhead® Wiring Devices

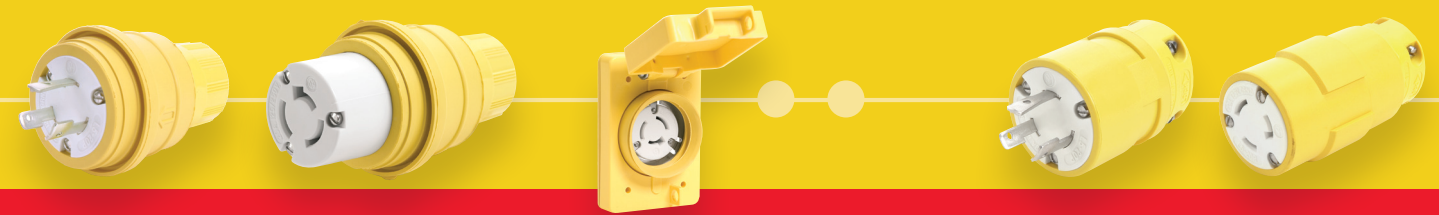

## Key Product Selector Guide

NEMA CONFIGURATION	VOLTAGE/AMPERAGE	WATERTITE®						SUPER-SAFEWAY™		SAFEWAY®			
		PLUG	CONNECTOR	SINGLE FLIP LID w/ FEMALE RECEPTACLE	DUPLEX FLIP LID w/ FEMALE RECEPTACLE	SINGLE FLIP LID w/ MALE RECEPTACLE	CONNECTOR FOR MALE RECEPTACLE	PLUG	CONNECTOR	PLUG	CONNECTOR	FLANGED INLET	FLANGED RECEPTACLES
<b>2-POLE/2-WIRE</b>													
1-15	15A/125V	14W04 14W19 <sup>1</sup>	15W04	60W04	60W04DPLX	59W04	15W04MB	1404 1419 <sup>1</sup>	1504	5166 5176 <sup>1</sup>	5169	1404MB	1504MB
L1-15	15A/125V	24W04	25W04	65W04	65W04DPLX	64W04	25W04MB	2404	2504	24T04	25T04	2404MB	2504MB
L2-20	20A/250V	26W07	27W07	67W07	67W07DPLX	66W07	27W07MB	2607	2707	26T07	27T07	2607MB	2707MB
<b>2-POLE/3-WIRE</b>													
5-15	15A/125V	14W47	15W47	60W47	60W47DPLX	59W47	15W47MB	1447	1547	5266	5269	1447MB	1547MB
L5-15	15A/125V	24W47	25W47	65W47	65W47DPLX	64W47	25W47MB	2447	2547	4720	4729	2447MB	2547MB
6-15	15A/250V	14W49	15W49	60W49	60W49DPLX	59W49	15W49MB	1449	1549	5666	5669	1449MB	1549MB
L6-15	15A/250V	24W49	25W49	65W49	65W49DPLX	64W49	25W49MB	2449	2549	—	—	2449MB	2549MB
7-15	15A/277V	14W34	15W34	60W34	60W34DPLX	59W34	15W34MB	1434	1534	5766	5769	1434MB	1534MB
L7-15	15A/277V	24W34	25W34	65W34	65W34DPLX	64W34	25W34MB	2434	2534	4770	4779	2434MB	2534MB
5-20	20A/125V	14W33	15W33	60W33	60W33DPLX	59W33	15W33MB	1433	1533	5366	5369	1433MB	1533MB
L5-20	20A/125V	26W47	27W47	67W47	—	66W47	27W47MB	2647	2747	26T47	27T47	2647MB	2747MB
6-20	20A/250V	14W48	15W48	60W48	60W48DPLX	59W48	15W48MB	1448	1548	5466	5469	1448MB	1548MB
L6-20	20A/250V	26W48	27W48	67W48	—	66W48	27W48MB	2648	2748	26T48	27T48	2648MB	2748MB
L7-20	20A/277V	26W49	27W49	67W49	—	66W49	27W49MB	2649	2749	26T49	27T49	2649MB	2749MB
L5-30	30A/125V	28W47	29W47	69W47	—	68W47	29W47MB	2847	2947	28T47	29T47	2847MB	2947MB
L6-30	30A/250V	28W48	29W48	69W48	—	68W48	29W48MB	2848	2948	28T48	29T48	2848MB	2948MB
L7-30	30A/277V	28W49	29W49	69W49	—	68W49	29W49MB	2849	2949	28T49	29T49	2849MB	2949MB
6-50	50A/250V	—	—	—	—	—	—	8664	8665	—	—	—	—
Non-NEMA Locking CA	50A/125V	CS63W61	CS63W60	CS69W60	—	—	—	—	—	CS6361N	CS6360N	CS6377	CS6370 <sup>2</sup>
Non-NEMA Locking	50A/125V	63W61	63W60	69W60	—	—	—	—	—	—	—	—	—
Non-NEMA Locking CA	50A/250V	CS82W65	CS82W64	69W64	—	—	—	—	—	CS8265N	CS8264N	CS8275	CS8269 <sup>2</sup>
Non-NEMA Locking	50A/600VAC/250VDC	—	—	—	—	—	—	—	—	3763N	3762N	3777	3771 <sup>2</sup>
Non-NEMA Locking CA	50A/480V	CS84W65	CS84W64	67W64	—	—	—	—	—	CS8465N	CS8464N	CS8475	CS8469 <sup>2</sup>
<b>3-POLE/3-WIRE</b>													
Non-NEMA	15A/125V 10A/250V	14W07	15W07	60W07	60W07DPLX	59W07	15W07MB	1407	1507	5276	1507	1407MB	1507MB
Non-NEMA Locking	15A/125V 10A/250V	24W07	25W07	65W07	65W07DPLX	64W07	25W07MB	2407	2507	4730	4739	2407MB	2507MB
Non-NEMA Locking	20A/125V/250V	26W08	27W08	67W08	—	66W08	27W08MB	2608	2708	26T08	27T08	2608MB	2708MB
Non-NEMA Locking	20A/250V GROUNDING TAB	26W08G	27W08G	—	—	—	27W08GMB	2608G	2708G	26T08G	27T08G	—	—
Non-NEMA Locking	30A/125V/250V	28W08	29W08	69W08	—	68W08	29W08MB	2808	2908	28T08	29T08	2808MB	2908MB
<b>3-POLE/4-WIRE</b>													
L14-20	20A/125V/250V	26W74	27W74	67W74	—	66W74	27W74MB	2674	2774	26T74	27T74	2674MB	2774MB
L15-20	20A/250V/3ø	26W75	27W75	67W75	—	66W75	27W75MB	2675	2775	26T75	27T75	2675MB	2775MB
L16-20	20A/480V/3ø	26W76	27W76	67W76	—	66W76	27W76MB	2676	2776	26T76	27T76	2676MB	2776MB
L14-30	30A/125V/250V	28W74	29W74	69W74	—	68W74	29W74MB	2874	2974	28T74	29T74	2874MB	2974MB
L15-30	30A/250V/3ø	28W75	29W75	69W75	—	68W75	29W75MB	2875	2975	28T75	29T75	2875MB	2975MB
L16-30	30A/480V/3ø	28W76	29W76	69W76	—	68W76	29W76MB	2876	2976	28T76	29T76	2876MB	2976MB
L17-30	30A/600V/3ø	28W77	29W77	69W77	—	68W77	29W77MB	2877	2977	28T77	29T77	2877MB	2977MB
Non-NEMA Locking CA	50A/125V/250V	CS63W65	CS63W64	CS60W64	—	—	—	—	—	CS6365N	CS6364N	CS6375	CS6369 <sup>2</sup>
Non-NEMA Locking	50A/125V/250V	63W65	63W64	60W64	—	—	—	—	—	—	—	—	—
Non-NEMA Locking CA	50A/250V/3ø	CS83W65	CS83W64	65W64	—	—	—	—	—	CS8365N	CS8364N	CS8375	CS8369 <sup>2</sup>
Non-NEMA Locking	50A/600VAC/250VDC	—	—	—	—	—	—	—	—	3765N	3764N	3775	3769 <sup>2</sup>
Non-NEMA Locking CA	50A/480V/3ø	CS81W65	CS81W64	64W64	—	—	—	—	—	CS8165N	CS8164N	CS8175	CS8169 <sup>2</sup>
<b>4-POLE/4-WIRE</b>													
Non-NEMA Locking	20A/120V/208V	26W09	27W09	67W09	—	66W09	27W09MB	2609	2709	26T09	27T09	2609MB	2709MB
Non-NEMA Locking	30A/120V/208V	28W09	29W09	69W09	—	68W09	29W09MB	2809	2909	28T09	29T09	2809MB	2909MB
<b>4-POLE/5-WIRE</b>													
L21-20	20A/120V/208V/3øY	26W81	27W81	67W81	—	66W81	27W81MB	2681	2781	26T81	27T81	2681MB	2781MB
Non-NEMA Locking	20A/250V 10A/600V	26W10	27W10	67W10	—	66W10	27W10MB	2610	2710	26T10	27T10	2610MB	2710MB
L22-20	20A/277V/480V/3øY	26W82	27W82	67W82	—	66W82	27W82MB	2682	2782	26T82	27T82	2682MB	2782MB
L23-20	20A/347V/600V/3øY	26W83	27W83	67W83	—	66W83	27W83MB	2683	2783	—	—	2683MB	2783MB
L21-30	30A/120V/208V/3øY	28W81	29W81	69W81	—	68W81	29W81MB	2881	2981	28T81	29T81	2881MB	2981MB
L22-30	30A/277V/480V/3øY	28W82	29W82	69W82	—	68W82	29W82MB	2882	2982	28T82	29T82	2882MB	2982MB
L23-30	30A/347V/600V/3øY	28W83	29W83	69W83	—	68W83	29W83MB	2883	2983	28T83	29T83	2883MB	2983MB

<sup>1</sup> Polarized <sup>2</sup> Single Receptacles and Not Flanged Receptacles

		SUPER-SAFEWAY™							
RECEPTACLE (FEMALE END)		15A/125V (5-15)	15A/125V <sup>1</sup> (Non-NEMA)	20A/125V (5-20)	15A/125V (L5-15)	15A/125V <sup>1</sup> (Non-NEMA)	0A/125V (L5-20)	20A/125V (R&S PINS)	20A/250V (Non-NEMA)
15A/125V (1-15)			1702/00380		1705	1704/00136	1740		1730
15A/125V (5-15)			1702 <sup>3</sup> /00380 <sup>3</sup> C		1705	1704 <sup>3</sup> /00136 <sup>3</sup> C	1740		1730
15A/125V (Non-NEMA)		1706/00382 <sup>3</sup>							
20A/125V (5-20)							1740	1733	1730 A
15A/125V (L5-15)		1712				1725 C	1783		
15A/125V (Non-NEMA)		1708/00137 <sup>3</sup>			1719				
20A/125V (L5-20)		1744 B		1741					
20A/250V (Non-NEMA)		1732 C							

<sup>1</sup> Also Rated 10A/250V <sup>2</sup> With Grounding Tab <sup>3</sup> For Adapter Wiring See Catalog

Read across for plug (blade) configuration, then read down for receptacle (slot) configuration. Order the Woodhead number in intersecting box.

**THE FOLLOWING LETTER CODES INDICATE LIMITED USE ADAPTERS:**

- A** For use only with receptacles wired for 125V single-phase grounding service.
- B** For use only up to a maximum of 15A.
- C** For use only with receptacles wired for 15A/125V single-phase grounding service.



Most Woodhead products have U.L. and/or CSA approvals

[www.molex.com/Woodhead](http://www.molex.com/Woodhead)

**molex**