



.05  
(1.3)  
CENTERLINE OF PIN IN AREA SHOWN  
NOT TO VARY FROM CENTERLINE  
OF PIN AT DATUM -D- BY  
MORE THAN .008/(.20) IN ANY DIRECTION

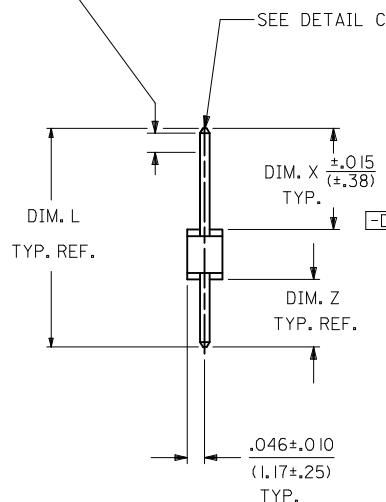


SEE DETAIL C

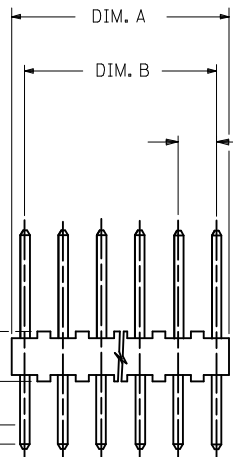

.100±.002  
(2.54±.05)  
TYP. BETWEEN ANY TWO  
CONSECUTIVE CKTS  
AT DATUM -D-

-D-  
.130±.015  
(3.30±.38)  
TYP.

.05  
(1.3)  
CENTERLINE OF PIN IN AREA SHOWN  
NOT TO VARY FROM CENTERLINE  
OF PIN AT DATUM -D- BY  
MORE THAN .005/(.13) IN ANY DIRECTION

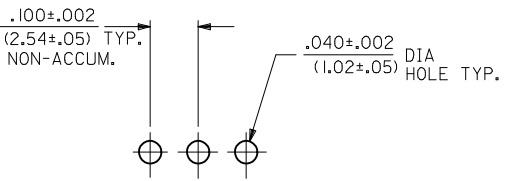

PCB LAYOUT: COMPONENT SIDE  
TYPICAL PCB THICKNESS: .062/(1.57)

A-4030-N \* (\* \*)  
NO. OF CKTS.  
VERSION  
LETTER CHANGES WHEN PIN  
NO. OR PRESS DIM. CHANGES.  
PLATING CODE  
SEE NOTE 2

SECONDARY OPERATIONS	
CODE	PACKAGE
BLANK	BULK PER PK-4030-001
A	TUBE PER PK-44743-002

- NOTES:
- MATERIAL: WAFER: NYLON, UL94V-0, COLOR: WHITE  
PINS: COPPER ALLOY
  - FINISH: 102: .000200/0.00508 MIN TIN OVER .000100/0.00254 MIN COPPER  
132: .000200/0.00508 MIN TIN OVER .000200/0.00508 MIN COPPER  
501: .000020/0.00051 MIN GOLD OVER .000030/0.00076 MIN NICKEL  
503: .000030/0.00076 MIN GOLD OVER .000050/0.00127 MIN NICKEL  
516: .000010/0.00025 MIN GOLD OVER .000030/0.00076 MIN NICKEL
  - PARTS CONFORM TO PRODUCT SPECIFICATION PS-10-07.
  - PACKAGING INFORMATION: SEE LEGEND
  - PINS MUST CONFORM TO SOLDERABILITY SPECIFICATION SMES-152.
  - PIN PUSH OUT FORCE: 2 LBS. MIN.
  - PARTS ARE STACKABLE END TO END AND SIDE TO SIDE ON .100/(2.54) CENTERS.
  - SEE SDA-4030 FOR STANDARD CATALOG PRODUCTS.
  - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CKTS. NO. OF	DIM. B	DIM. A
2	.100 ± .002 ( 2.54 ± .05 )	.190 ± .008 ( 4.83 ± .20 )
3	.200 ± .005 ( 5.08 ± .13 )	.290 ± .008 ( 7.37 ± .20 )
4	.300 ± .005 ( 7.62 ± .13 )	.390 ± .008 ( 9.91 ± .20 )
5	.400 ± .005 ( 10.16 ± .13 )	.490 ± .008 ( 12.45 ± .20 )
6	.500 ± .006 ( 12.70 ± .15 )	.590 ± .009 ( 14.99 ± .23 )
7	.600 ± .006 ( 15.24 ± .15 )	.690 ± .009 ( 17.53 ± .23 )
8	.700 ± .006 ( 17.78 ± .15 )	.790 ± .009 ( 20.07 ± .23 )
9	.800 ± .007 ( 20.32 ± .18 )	.890 ± .010 ( 22.61 ± .25 )
10	.900 ± .007 ( 22.86 ± .18 )	.990 ± .010 ( 25.15 ± .25 )
11	1.000 ± .007 ( 25.40 ± .18 )	1.090 ± .010 ( 27.69 ± .25 )
12	1.100 ± .008 ( 27.94 ± .20 )	1.190 ± .011 ( 30.23 ± .28 )
13	1.200 ± .008 ( 30.48 ± .20 )	1.290 ± .011 ( 32.77 ± .28 )
14	1.300 ± .008 ( 33.02 ± .20 )	1.390 ± .011 ( 35.31 ± .28 )
15	1.400 ± .008 ( 35.56 ± .20 )	1.490 ± .011 ( 37.85 ± .28 )
16	1.500 ± .008 ( 38.10 ± .20 )	1.590 ± .011 ( 40.39 ± .28 )
17	1.600 ± .009 ( 40.64 ± .23 )	1.690 ± .012 ( 42.93 ± .30 )
18	1.700 ± .009 ( 43.18 ± .23 )	1.790 ± .012 ( 45.47 ± .30 )
19	1.800 ± .009 ( 45.72 ± .23 )	1.890 ± .012 ( 48.01 ± .30 )
20	1.900 ± .009 ( 48.26 ± .23 )	1.990 ± .012 ( 50.55 ± .30 )
21	2.000 ± .010 ( 50.80 ± .25 )	2.090 ± .013 ( 53.09 ± .33 )
22	2.100 ± .010 ( 53.34 ± .25 )	2.190 ± .013 ( 55.63 ± .33 )
23	2.200 ± .010 ( 55.88 ± .25 )	2.290 ± .013 ( 58.17 ± .33 )
24	2.300 ± .010 ( 58.42 ± .25 )	2.390 ± .013 ( 60.71 ± .33 )
25	2.400 ± .011 ( 60.96 ± .28 )	2.490 ± .014 ( 63.25 ± .36 )
26	2.500 ± .011 ( 63.50 ± .28 )	2.590 ± .014 ( 65.79 ± .36 )
27	2.600 ± .011 ( 66.04 ± .28 )	2.690 ± .014 ( 68.33 ± .36 )
28	2.700 ± .011 ( 68.58 ± .28 )	2.790 ± .014 ( 70.87 ± .36 )

ADD 22-03-5117 EC NO: UCP2010-0896 DRWN:KIPPER 2009/10/16 CHKD:SSOUSEK 2009/10/20 APPR:FSMITH 2009/10/20 REV: C15	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr><th colspan="2">mm</th><th colspan="2">INCH</th></tr> <tr><td>4 PLACES ±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>3 PLACES ±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>2 PLACES ±</td><td>---</td><td>±</td><td>---</td></tr> <tr><td>1 PLACE ±</td><td>---</td><td>±</td><td>---</td></tr> </table>	mm		INCH		4 PLACES ±	---	±	---	3 PLACES ±	---	±	---	2 PLACES ±	---	±	---	1 PLACE ±	---	±	---	DIMENSION STYLE <b>IN/MM</b>	SCALE --- <b>INCH</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION
	mm		INCH																							
	4 PLACES ±	---	±	---																						
	3 PLACES ±	---	±	---																						
2 PLACES ±	---	±	---																							
1 PLACE ±	---	±	---																							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY SAMIEC DATE 06/10/88	CHECKED BY PATEL DATE 06/10/88	APPROVED BY LENZ DATE 06/10/88	TITLE <b>KK 100 HEADER FLAT          CUSTOM PRODUCTS</b>	MATERIAL NO. <b>SEE CHART</b>	DOCUMENT NO. <b>SDA-4030-002</b>																				
SIZE <b>C</b>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SHEET NO. <b>1 OF 16</b>																								
MOLEX MOLEX INCORPORATED																										