

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0444721655](#)

Status: **Active**

Overview: [Mini-Fit® Plus HCS](#)

Description: Mini-Fit® HCS Header, 4.20mm Pitch, Dual Row, Vertical, without Snap-in Plastic Peg PCB Lock, 16 Circuits, PA Polyamide Nylon 6/6 94V-0, without Drain Holes

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-44476-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [44472](#)
Application Power, Wire-to-Board
Comments Square Pin|Solder Type
Overview [Mini-Fit® Plus HCS](#)
Product Name Mini-Fit® HCS
UPC 800754913874

Physical


Breakaway No
Circuits (Loaded) 16
Circuits (maximum) 16
Color - Resin Natural (White)
Durability (mating cycles max) 30
Flammability 94V-0
Glow-Wire Compliant No
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 4.496/g
Number of Rows 2
Orientation Vertical
PCB Locator Yes
PCB Retention None
PCB Thickness - Recommended 1.80mm
Packaging Type Tray
Pitch - Mating Interface 4.20mm
Plating min - Mating 2.540µm
Plating min - Termination 2.540µm
Polarized to PCB Yes
Shrouded Partial
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 11.0A
Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005

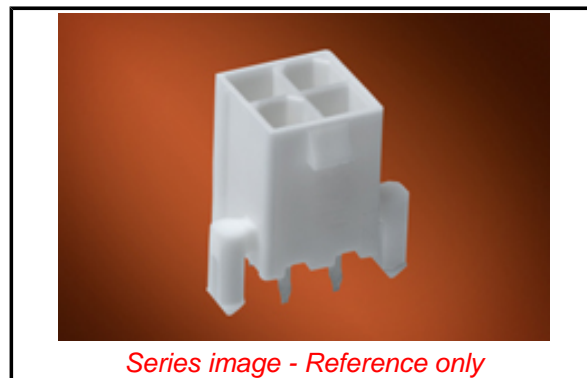

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
ELV

[China RoHS](#)
Green Image
Not Relevant

Search Parts in this Series

[44472 Series](#)

Mates With

[5557 Dual Row](#)

Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Product Specification PS-44476-001, RPS-44476-001

This document was generated on 06/26/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION