

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0780120011**
Status: **Active**
Overview: Serial Attached SCSI (SAS) Connectors
Description: 1.27mm Pitch, Serial Attached SCSI Combo Device Plug, Vertical, Surface Mount, 29 Circuits, Plastic Locating Pegs, Pick-and-Place Cap, Embossed Tape on Reel, Lead-Free

Documents:

[3D Model](#) [Product Specification PS-78012-002-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family I/O Connectors
 Series 78012
 Application Board-to-Board
 Comments With Cap
 Component Type Plug
 Electrical Model Yes
 Overview Serial Attached SCSI (SAS) Connectors
 Product Name SAS 6G
 Type N/A
 UPC 822350343053

Physical

Boot Color N/A
 Circuits (Loaded) 29
 Circuits (maximum) 29
 Circuits Detail Signal 14, Power 15
 Color - Resin Black
 Durability (mating cycles max) 500
 Flammability 94V-0
 Gender Plug
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 1.750/g
 Number of Rows 2
 Orientation Vertical
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 1.57mm
 Packaging Type Embossed Tape on Reel
 Panel Mount Yes
 Pitch - Mating Interface 0.80mm, 1.27mm
 Pitch - Termination Interface 0.80mm, 1.27mm
 Plating min - Mating 0.762µm
 Plating min - Termination 1.905µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +85°C

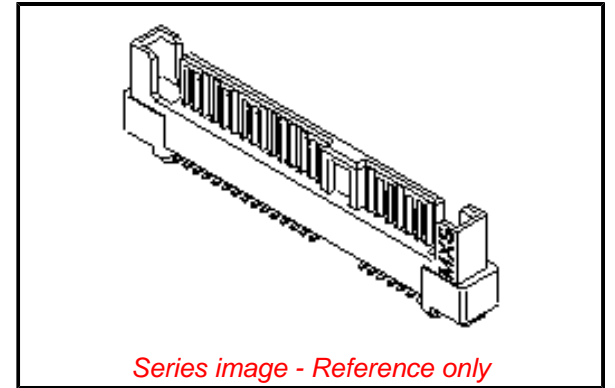

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/30/2017 (7 July
 2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

78012 Series

Mates With

78011 SATA Receptacle, SFF 8482 Unshielded Dual Port Serial Attachment Connector

Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Electrical Model Document	EE-78012-002, EE-87863-006, EE-87863-007
Product Specification	PS-78012-002-001
S-Parameter Model	SP-78012-002
Sales Drawing	SD-78012-101

This document was generated on 10/23/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION