

FEATURES AND BENEFITS

molex[®] MicroCross[™] DVI (Digital Visual Interface) Connector System

MicroCross DVI System Offers Improved Performance and Design Flexibility




The MicroCross DVI I/O Connectors from Molex are leading the way in support of the DDWG (Digital Display Working Group) DVI interface standard. MicroCross DVI has been chosen by the DDWG as the standard digital interface for connecting a host device and display device to support high-resolution video applications. Supporting one or two digital links driven by TMDS* (Transition Minimized Differential Signaling) and/or a high bandwidth analog interface, the MicroCross was chosen by the DDWG for its size, performance and cost. No other interface in the industry compares. The innovative crossing ground blade design and LFH[™] (Low Force Helix) contact interface design provides the industry with a video interface design that will support over 1.65 Gbps per differential pair (for a total 9.9 Gbps over a dual link implementation) and 2.5GHz support for the analog interface. These features provide the industry the performance head room it needs for future growth and development of video products.

*TMDS is a trademark of Silicon Image, Inc.

The innovative MicroCross design addresses the problem of an industry in transition. By providing a single high performance interface, precious board I/O space is saved and lower system costs are achieved. The interface provides added benefits of a high cycle life interface for mobile applications and the improved EMI/RFI performance needed for high speed links. The EMI performance is achieved through the 360° shielding of the MicroCross DVI cable and connector design. The MicroCross DVI connector system and the DVI standard are moving the graphics industry to the next level by providing unmatched electrical and mechanical performance while allowing for low cost implementation.

The MicroCross DVI is backed by the DDWG Promoters Group (Intel, IBM, Compaq, HP, NEC, Fujitsu, and Silicon Image) for meeting the total system's needs for future Video I/O. The MicroCross DVI complements Molex's MicroCross P&D system, supported by the VESA's P&D and Home Theater standards. For further information or support on MicroCross products contact Molex or visit <http://www.molex.com/product/io/dviintro.html>.

Supports Digital and/or Analog Video Functions in One Connector System

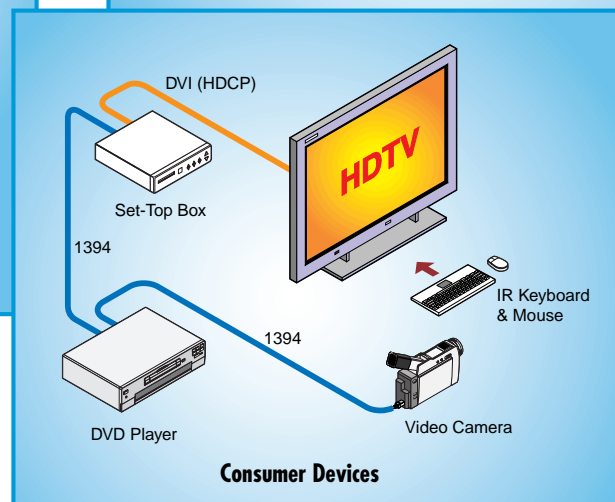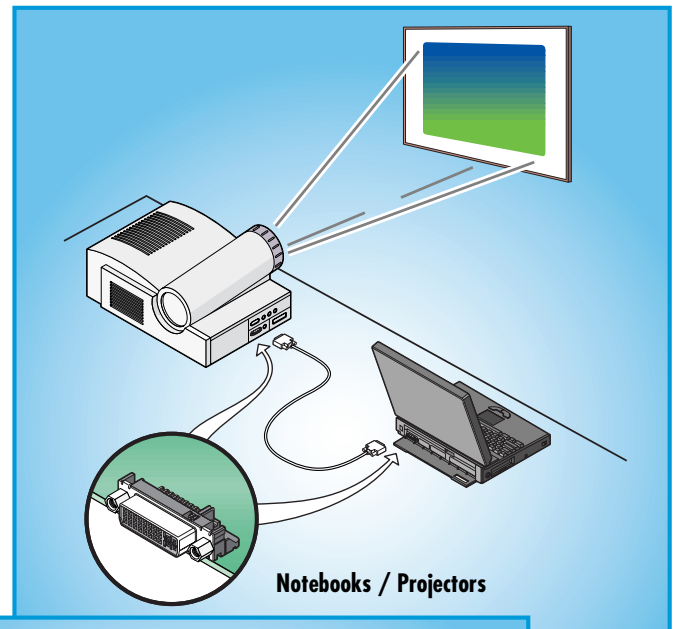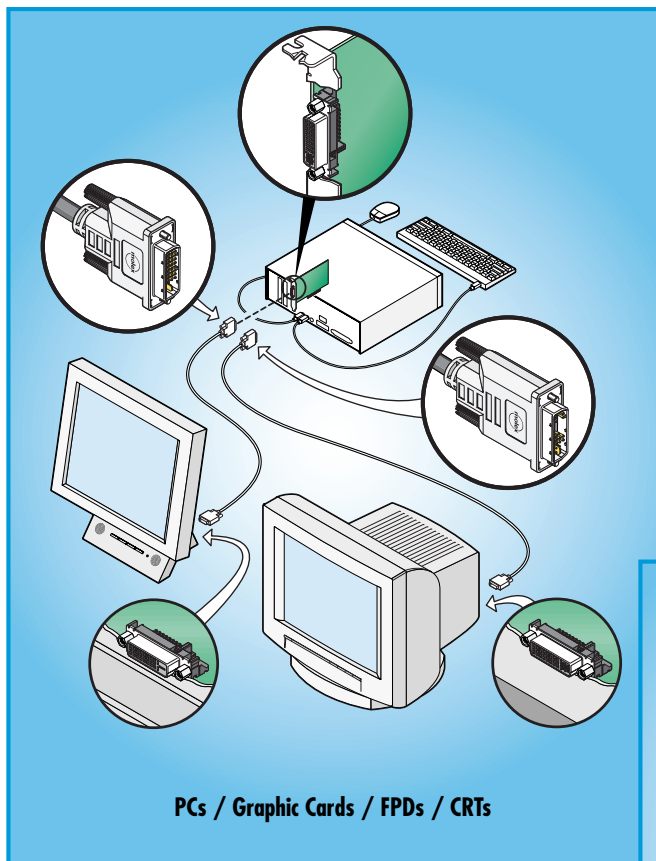


SIGNAL INTERFACE

molex® MicroCross™ DVI Connector System

MicroCross High Speed Pins:

- C1: Analog Red Video Out
- C2: Analog Green Video Out
- C3: Analog Blue Video Out
- C4: Analog Horizontal Sync
- C5: Analog Common Ground Return (Red, Green, Blue Video Out)

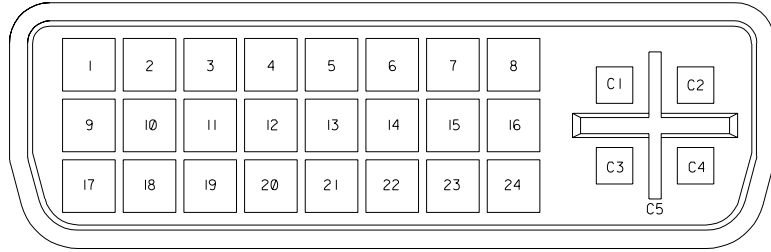


DVI-I Receptacle Connector Front View

Main Pin Field:


- | | | | | | |
|---|----------------------|----|------------------------------|----|----------------------|
| 1 | TMDS Data 2- | 9 | TMDS Data 1- | 17 | TMDS Data 0- |
| 2 | TMDS Data 2+ | 10 | TMDS Data 1+ | 18 | TMDS Data 0+ |
| 3 | TMDS Data 2/4 Shield | 11 | TMDS Data 1/3 Shield | 19 | TMDS Data 0/5 Shield |
| 4 | TMDS Data 4- | 12 | TMDS Data 3- | 20 | TMDS Data 5- |
| 5 | TMDS Data 4+ | 13 | TMDS Data 3+ | 21 | TMDS Data 5+ |
| 6 | DDC Clock | 14 | +5V Power | 22 | TMDS Clock Shield |
| 7 | DDC Data | 15 | Ground (+5, Analog H/V Sync) | 23 | TMDS Clock+ |
| 8 | Analog Vertical Sync | 16 | Hot Plug Detect | 24 | TMDS Clock- |

Pin 14 is recessed in the plug connector so as to provide for proper power/ground sequencing


RECEPTACLES




Right Angle DVI-I Receptacle with Peg




Vertical DVI-I Receptacle with Peg



Right Angle DVI-D Receptacle with Peg




Vertical DVI-D Receptacle with Peg




Right Angle DVI-D ATX Receptacle with Forklock

Description	Order No.	
	Gold Flash	30µ" Gold
DVI-I Right Angle Digital/Analog Receptacle	74320-1004	74320-1000
DVI-A Right Angle Analog Receptacle	74320-1009	74320-1008
DVI-I Vertical Digital/Analog Receptacle	74320-3004	74320-3000
DVI-A Vertical Analog Receptacle	74320-3009	74320-3008
DVI-D Right Angle Digital Receptacle	74320-4004	74320-4000
DVI-D Vertical Digital Receptacle	74320-5004	74320-5000
DVI-D Right Angle Digital ATX Receptacle with Forklocks	74320-9004	74320-9000
DVI-I Right Angle Digital/Analog Receptacle with Forklocks	74320-9014	74320-9010
DVI-D Right Angle Digital Extended Height Receptacle	74320-2010	74320-2011
DVI-I Right Angle Digital/Analog Extended Height Receptacle	74320-2020	74320-2021




Right Angle DVI-I Receptacle with Forklock

4-40 MOUNTING HARDWARE




Clear Chromate Jackpost Screw




Zinc/Yellow Chromate Jackpost Screw


Description	Order No.	Plating
Standard Panel Mount Hardware	71781-0001	Clear Chromate
Self-Clinching Panel Mount Hardware	71781-0002	Zinc/Yellow Chromate




**DVI-Digital to DVI-Digital Single Link
88741-80XX**




**DVI-Digital to DVI-Digital Dual Link
88741-81XX**




**DVI-Analog to DVI-Analog
88741-82XX**




**DVI-Analog to VGA Analog
88741-83XX**




**DVI-Analog to P&D-Analog
88741-84XX**




**DVI-Digital to P&D-Digital
88741-85XX**



**DVI-Digital to DFP Digital
88741-86XX**



**DVI-Digital/Analog to DVI-Digital/Analog Single Link
88741-90XX**






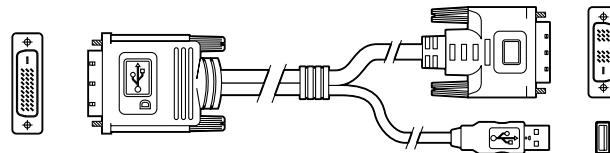


**M1-D Digital to DVI-Digital Single Link and USB Breakout
88745-2200 (2m Length)**

- Note:
1. Plug contacts will be partially loaded depending on the signal set
 2. a) Replace XX with 00 for 2m, 10 for 3m, and 20 for 5m black cable assemblies
b) Replace XX with 01 for 2m, 11 for 3m, and 21 for 5m white cable assemblies







PASSIVE ADAPTERS

molex® MicroCross™ DVI Connector System

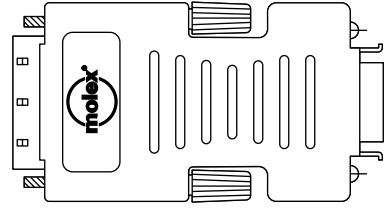







**DVI-Analog Plug to VGA Receptacle
88741-8700
Analog to Analog**

**DVI-Digital Plug to DFP Receptacle
88741-8800
Digital to Digital**

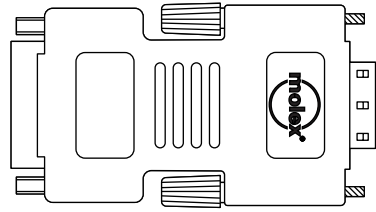







**DVI-Digital Plug to P&D-Digital Receptacle
88741-8900
Digital to Digital**

**DVI-Analog Receptacle to VGA Plug
88741-9100
Analog to Analog**

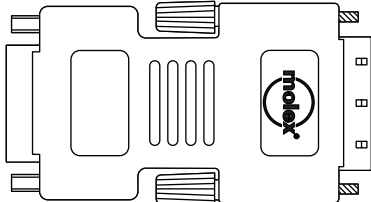

**DVI-Digital Receptacle to P&D-Digital Plug
88741-9200
Digital to Digital**

**DVI-Digital Receptacle to DFP Plug
88741-9300
Digital to Digital**

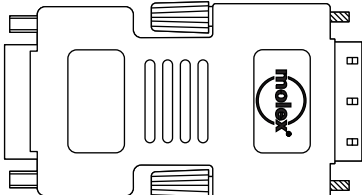

**DVI-Digital Receptacle to DVI-Digital Plug
88741-9400
Digital to Digital**

**DVI-Analog Plug to VGA Receptacle Z Design
88741-8701
Analog to Analog**

Note: 1) Plug contacts will be partially loaded depending on the signal set.
2) Adapters are passive not active. Digital to analog conversions of the video signal are not supported.

FEATURES AND SPECIFICATIONS




MicroCross™ DVI (Digital Visual Interface) Plug Components



Molex offers cable plug components for customers who choose to build their own MicroCross DVI cable assemblies.

Features and Benefits

- The mating interface features Molex's patented LFH™ (Low Force Helix) contact system, which provides high mechanical reliability and optimal signal integrity
- Compliant with the DVI standard specification 1.0
- Boots are compliant with PC99/01 white color and DVI icon requirements
- Fully shielded for RFI/EMI considerations
- Plugs contain staggered tails for easy solder termination
- Impedance controlled coaxial termination through a compact common ground blade termination that is simple and fast
- First break/last make for proper power and ground sequencing to support hot plugging
- Accommodates wire sizes from 32 to 22 AWG for most wire constructions
- Optional shield cans and crimp ferrules are available to accommodate custom cable diameters
- Application tooling available
- Pre-loaded contacts provide an easy assembly solution and eliminate unnecessary manufacturing steps

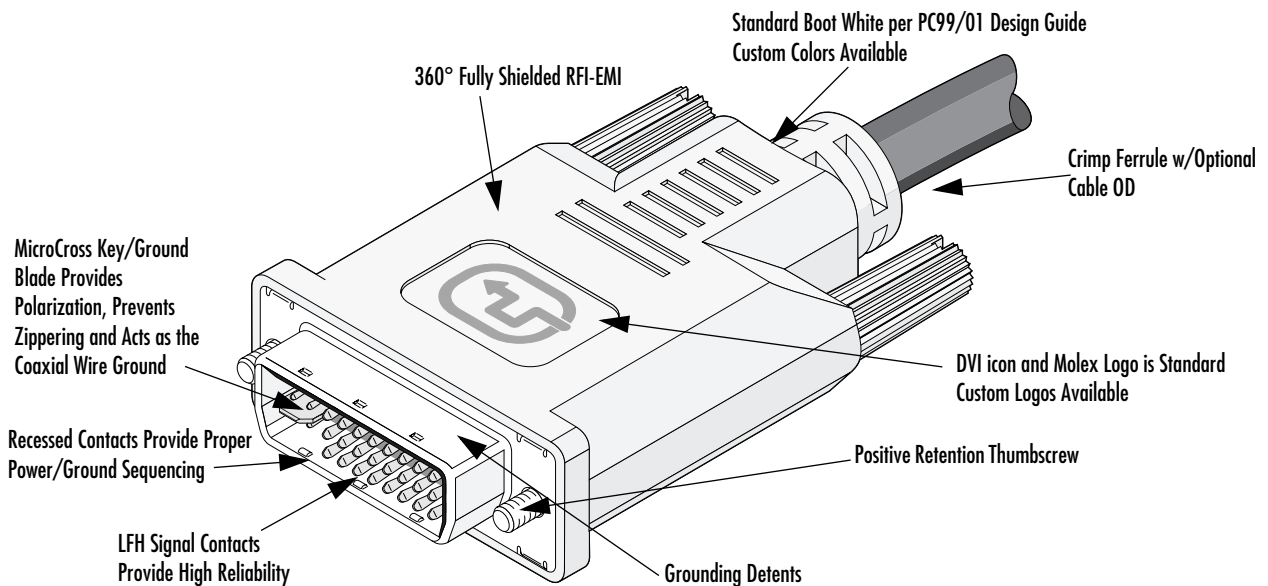

CABLE PLUG COMPONENTS

Following are recommended bills of material required to build a MicroCross DVI cable assembly.

DVI Digital Single Link Components

Description	Order No.	Quantity
Single Link Plug	74323-2001	1
EMI Can Kit	88789-9332	1
Boot	88743-2202	1
Crimp Ferrule	*73772-000X	1
Thumbscrew	88780-6006	2

DVI Digital Dual Link Components

Description	Order No.	Quantity
Dual Link Plug	74323-2003	1
EMI Can Kit	88789-9332	1
Boot	88743-2202	1
Crimp Ferrule	*73772-000X	1
Thumbscrew	88780-6006	2

DVI Integrated Analog and Digital Single Link Components

Description	Order No.	Quantity
Integrated Single Link Plug	74323-2031	1
EMI Can Kit	88789-9333	1
Boot	88743-2302	1
Crimp Ferrule	*73772-000X	1
Thumbscrew	88780-6005	2

DVI Integrated Analog and Digital Dual Link Components


Description	Order No.	Quantity
Integrated Dual Link Plug	74323-2033	1
EMI Can Kit	88789-9333	1
Boot	88743-2302	1
Crimp Ferrule	*73772-000X	1
Thumbscrew	88780-6005	2

DVI Analog Components


Description	Order No.	Quantity
Analog Plug	74323-2011	1
EMI Can Kit	88789-9333	1
Boot	88743-2302	1
Crimp Ferrule	*73772-000X	1
Thumbscrew	88780-6005	2

Other plug contact plating options available - Contact Molex.
*Crimp ferrule ordering information on page 6.


Single Link Digital Plug Shown

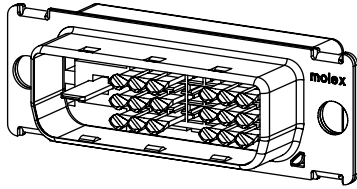


Analog Plug Shown

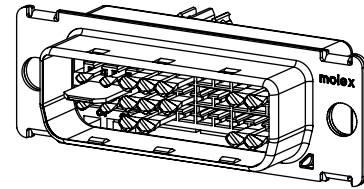


Digital EMI Can Kit

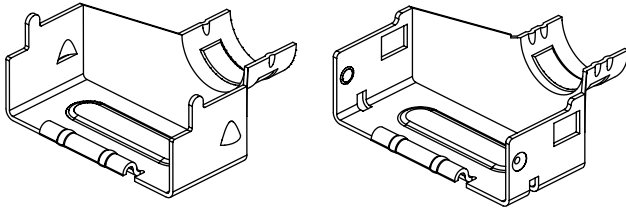


Analog and Integrated EMI Can Kit

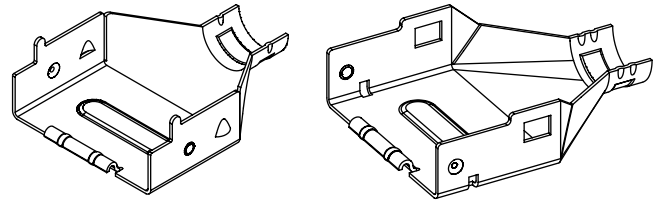


Digital Boot




Analog and Integrated Boot



Digital Thumbscrew




Analog and Integrated Thumbscrew



Optional Cable O.D. Boots available. Contact Molex

Crimp Ferrule



Application Tooling is available. Contact Molex

***Ordering Information**

Order No.	Cable OD
73772-0001	6.25-8.16mm (.246-.321")
73772-0002	8.17-9.00mm (.322-.354")
73772-0003	9.01-9.84mm (.355-.387")
73772-0004	9.85-10.67mm (.388-.420")



Americas Headquarters

Lisle, Illinois 60532 U.S.A.
Tel: 1-800-78MOLEX
Fax: 630-969-1352

Far East North Headquarters

Yamato, Kanagawa, Japan
Tel: 81-462-65-2324
Fax: 81-462-65-2366

Far East South Headquarters

Jurong, Singapore
Tel: 65-268-6868
Fax: 65-265-6044

European Headquarters

Munich, Germany
Tel: 49-89-413092-0
Fax: 49-89-401527

Corporate Headquarters

2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
Tel: 630-969-4550

Visit our Web site at <http://www.molex.com/product/io/dviintro.html>