



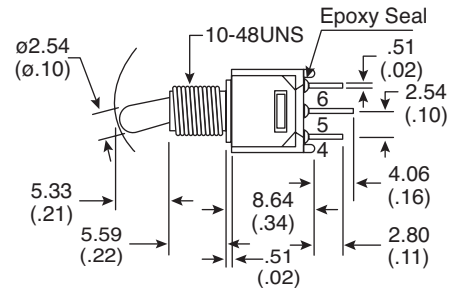




Dimensions: mm (in.)

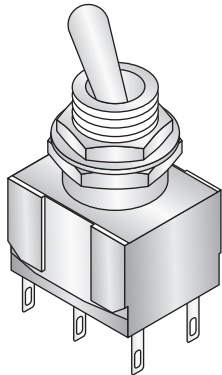

Solder Lug



Without locking ring.



With standard locking ring.

PANEL MOUNTING

| POS.1 | POS.2 |
|---------|---------|
| | |
| ON | ON |
| 2-3,5-6 | 2-1,5-4 |
| | |

Electrical Specifications:

- Contact Resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@ sea level.
- Rating: 1A / 250 VAC, 3A / 120 VAC or 28 VDC

Mechanical Specifications:

- Operating Temperature: -30° C to +85° C

Note:

- RoHS Compliant by Exemption

Materials:

- Case: Diallyl phthalate (DAP)
- Acuatorator: Brass, chrome plated.
- Bushing: Brass, nickel plated.
- Housing: Stainless steel.
- Terminal/Contact: Brass, silver plated.
- Switch Support: Brass, tin plated.

Toggle Switch
108-2MD1T2B3M1QE-EVX

