



Dimensions: mm (in.)

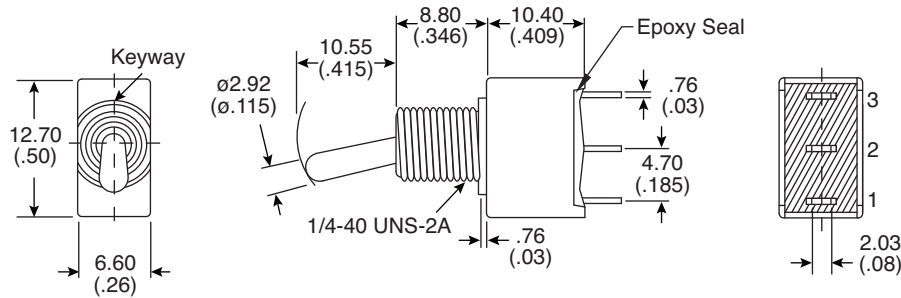


POS.1	POS.2
ON	(ON)
2-3	2-1

Switch Function




Without locking ring



With standard locking ring

Panel Mounting



Solder Lug

Electrical Specifications:

- Contact resistance: Below 10mΩ typ. initial @ 2-4 V DC, 100mA
- Insulation resistance: 1,000MΩ min.
- Dielectric strength: 1000 V RMS min. @sea level
- Rating: 2A/ 250VAC or 5A/120 VAC or 28 VDC

Mechanical Specifications:

- Mechanical life: 30,000 make-and-break cycles
- Operating temperature: -30°C ± 85°C

Note:

- RoHS Compliant By Exemption

Soldering Process:

- Manual soldering: use soldering iron of 30W, controlled at 350°C approx. 5 seconds while applying solder
- Wave soldering: recommended soldering temp.: 260±5°C Duration of solder immersion: 5±1 seconds (PCB is 1.6mm in thickness)

Sealed Miniature Toggle Switch
108-1AS5T1174-EVX

