Last Update: 6-11-12 **Ref. #:** MS-100744

Dimensions: mm (in.)

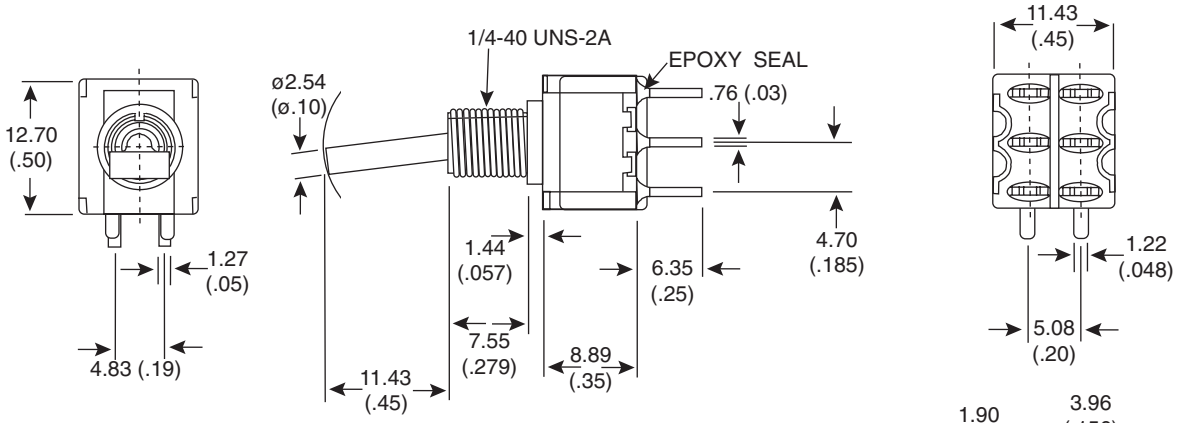



Without locking ring.



With standard locking ring.

PANEL MOUNTING

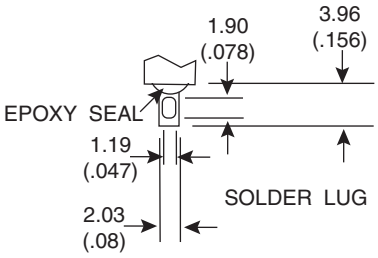

POS.1	POS.2
ON	(ON)
2-3,5-6	2-1,5-4
	

SWITCH FUNCTION

Mechanical Specifications:

- Operating Temperature: -30°C to +85°C

Electrical Specifications:

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS @ sea level
- Rating: 2A / 250VAC; 5A / 120VA or 28VDC

Materials:

- Case: Diallyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Terminal / Contact: Silver plated
- Switch Support: Brass, tin plated

Note:

- RoHS compliant by exemption

Toggle Switch

108-1MD2T6B1M1QE-EVX

Mountain Switch

Available from Mouser Electronics www.mouser.com 1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.