



Dimensions: mm (In.)



POS. 1	POS. 2
ON	MOM
2-1	2-3

SWITCH FUNCTION

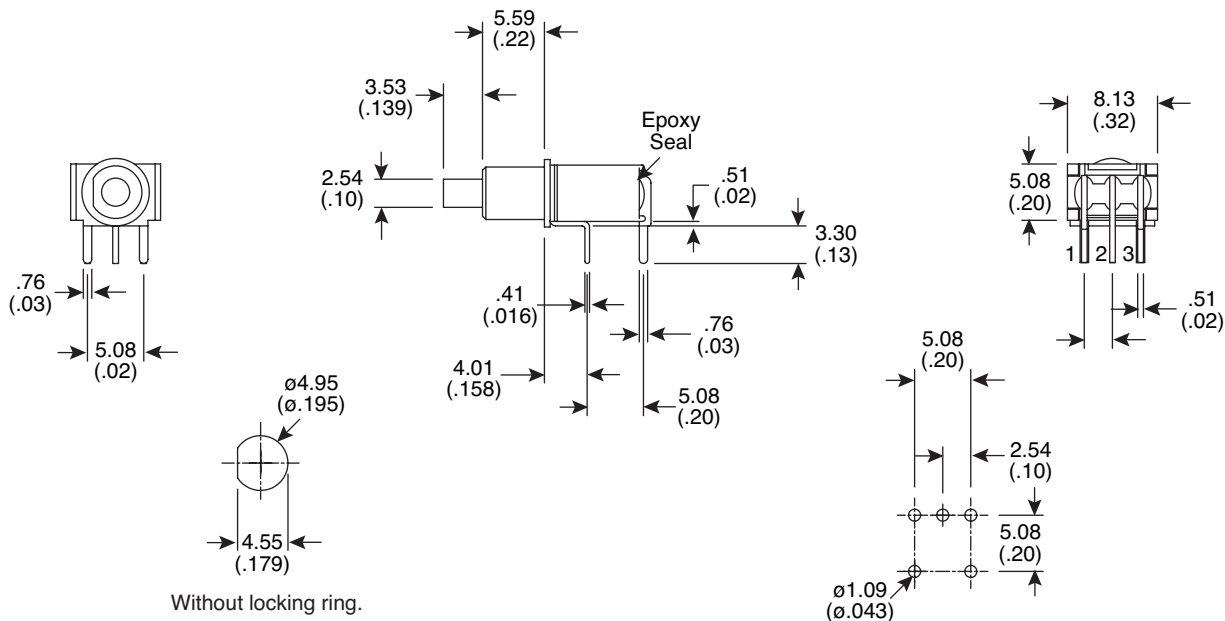

PANEL MOUNTING

P.C. MOUNTING

Electrical Specifications:

- Rating: 1/250VAC, 3/120VAC or 28 VDC
- Contact Resistance: 20m Ω max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000M Ω min.
- Dielectric Strength: 1,000 V RMS@ sea level

Mechanical Specifications:

- Mechanical Life: 60,000 make-and-break cycles
- Operating Temperature: -30°C to 85°C

Materials:

- Case: Diallyl phthalate (DAP)
- Plunger: Thermoplastic Polyester-black
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Contact: Brass, silver or gold plated
- Terminal: Brass, Silver plated
- Terminal Support: Brass, tin plated

Note:

- RoHS compliant by exemption

Sub-Miniature Pushbutton Switch
107-3023-EVX

