



### FEATURES

- RoHS compliant
- Single output rail
- 1kVDC isolation
- High efficiency for low power applications
- SIP & DIP package styles
- Power density 0.36W/cm<sup>3</sup>
- UL 94V-0 package material
- Footprint from 0.69cm<sup>2</sup>
- 5V & 12V input
- 5V, 9V, 12V & 15V output
- No heatsink required
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 2.7 million hours
- Custom solutions available
- Pin compatible with NKE, NME, NML & MEE3 series
- PCB mounting

### PRODUCT OVERVIEW

The LME series of DC/DC converters are optimised for low-power operation. They are ideally suited to generating a negative supply where only a positive rail exists.

### SELECTION GUIDE

| Order Code | Nominal Input Voltage | Output Voltage | Output Current | Efficiency | Isolation Capacitance | MTTF <sup>1</sup> | Package Style |
|------------|-----------------------|----------------|----------------|------------|-----------------------|-------------------|---------------|
|            | V                     | V              | mA             | %          | pF                    | kHrs              |               |
| LME0505DC  | 5                     | 5              | 50             | 70         | 29                    | 2279              | DIP           |
| LME0509DC  | 5                     | 9              | 28             | 75         | 37                    | 1139              |               |
| LME0512DC  | 5                     | 12             | 21             | 75         | 41                    | 624               |               |
| LME0515DC  | 5                     | 15             | 16             | 75         | 40                    | 357               | SIP           |
| LME0505SC  | 5                     | 5              | 50             | 70         | 29                    | 2279              |               |
| LME0509SC  | 5                     | 9              | 28             | 75         | 37                    | 1139              |               |
| LME0512SC  | 5                     | 12             | 21             | 75         | 41                    | 624               | DIP           |
| LME0515SC  | 5                     | 15             | 16             | 75         | 40                    | 357               |               |
| LME1205DC  | 12                    | 5              | 50             | 70         | 38                    | 536               |               |
| LME1209DC  | 12                    | 9              | 28             | 75         | 40                    | 434               | DIP           |
| LME1212DC  | 12                    | 12             | 21             | 75         | 43                    | 330               |               |
| LME1215DC  | 12                    | 15             | 16             | 75         | 45                    | 237               |               |
| LME1205SC  | 12                    | 5              | 50             | 70         | 38                    | 536               | SIP           |
| LME1209SC  | 12                    | 9              | 28             | 75         | 40                    | 434               |               |
| LME1212SC  | 12                    | 12             | 21             | 75         | 43                    | 330               |               |
| LME1215SC  | 12                    | 15             | 16             | 75         | 45                    | 237               |               |

### INPUT CHARACTERISTICS

| Parameter     | Conditions                            | Min. | Typ. | Max. | Units |
|---------------|---------------------------------------|------|------|------|-------|
| Voltage range | Continuous operation, 5V input types  | 4.5  | 5.0  | 5.5  | V     |
|               | Continuous operation, 12V input types | 10.8 | 12   | 13.2 |       |

### OUTPUT CHARACTERISTICS

| Parameter                    | Conditions                                  | Min. | Typ. | Max. | Units  |
|------------------------------|---|------|------|------|--------|
| Rated Power <sup>2</sup>     | T <sub>A</sub> =0°C to 70°C                 |      |      | 0.25 | W      |
| Voltage Set Point Accuracy   | See tolerance envelope                      |      |      |      |        |
| Line regulation              | High V <sub>IN</sub> to low V <sub>IN</sub> |      | 1.0  | 1.2  | %/%    |
| Load Regulation <sup>2</sup> | 10% load to rated load, 5V output types     |      |      | 15   | %      |
|                              | 10% load to rated load, all other types     |      |      | 10   |        |
| Ripple and Noise             | BW=DC to 20MHz, all output types            |      |      | 100  | mV p-p |

### ISOLATION CHARACTERISTICS

| Parameter              | Conditions                | Min. | Typ. | Max. | Units |
|------------------------|---------------------------|------|------|------|-------|
| Isolation test voltage | Flash tested for 1 second | 1000 |      |      | VDC   |
| Resistance             | Viso= 500VDC              | 1    |      |      | GΩ    |

### GENERAL CHARACTERISTICS

| Parameter           | Conditions      | Min. | Typ. | Max. | Units |
|---------------------|-----------------|------|------|------|-------|
| Switching frequency | All input types |      | 100  |      | kHz   |

### ABSOLUTE MAXIMUM RATINGS

|   |       |
|---|-------|
| Lead temperature 1.5mm from case for 10 seconds | 300°C |
| Input voltage V <sub>IN</sub> , LME05 types     | 7V    |
| Input voltage V <sub>IN</sub> , LME12 types     | 15V   |

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating curve.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.




For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


**TEMPERATURE CHARACTERISTICS**

| Parameter     | Conditions          | Min. | Typ. | Max. | Units |
|---------------|---------------------|------|------|------|-------|
| Specification | All output types    | 0    |      | 70   | °C    |
| Storage       |                     | -50  |      | 130  |       |
| Cooling       | Free air convection |      |      |      |       |

**TEMPERATURE DERATING GRAPH**

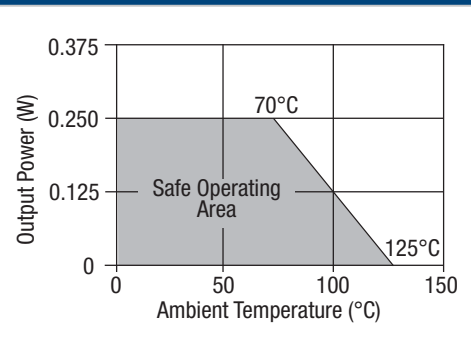

**TOLERANCE ENVELOPE**

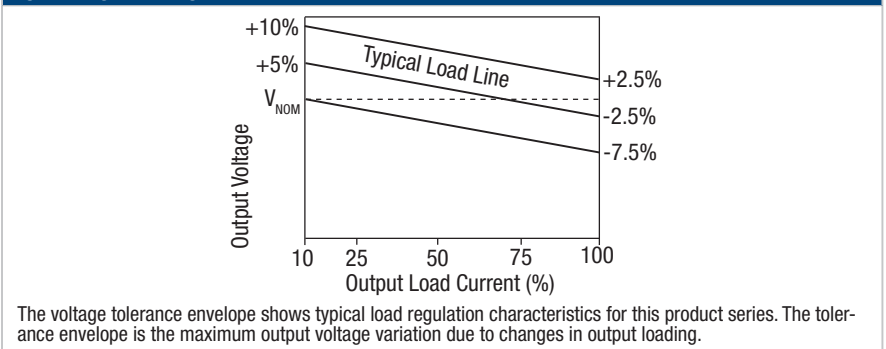

**TECHNICAL NOTES**

**ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions LME series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the LME series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

**REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The LME series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

**RoHS COMPLIANT INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

**APPLICATION NOTES**


**Minimum Load**

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.


**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**

**DIP Package**

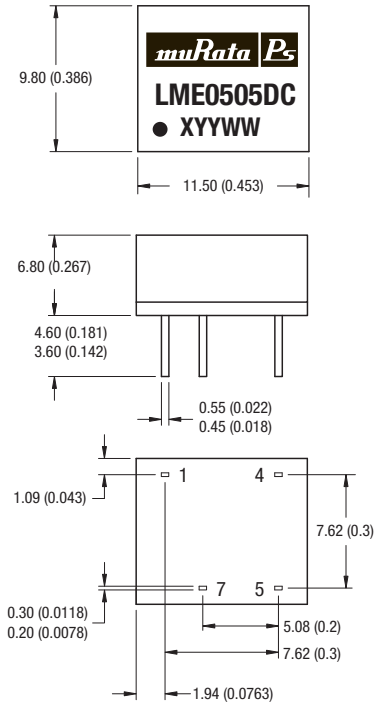

**SIP Package**

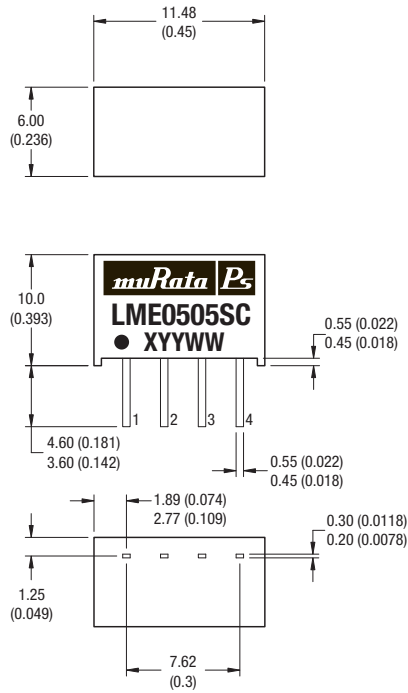

All dimensions in inches  $\pm 0.01$  (mm  $\pm 0.25$ mm). All pins on a 0.1 (2.54) pitch and within  $\pm 0.01$  (0.25) of true position.

Weight: 1.30g (SIP) 1.48g (DIP)

**PIN CONNECTIONS - 8 PIN DIP**

| Pin | Function |
|-----|----------|
| 1   | -VIN     |
| 4   | +VIN     |
| 5   | +VOUT    |
| 7   | -VOUT    |


**PIN CONNECTIONS - 4 PIN SIP**

| Pin | Function |
|-----|----------|
| 1   | -VIN     |
| 2   | +VIN     |
| 3   | -VOUT    |
| 4   | +VOUT    |

**PACKAGE SPECIFICATIONS (continued)**


**RECOMMENDED FOOTPRINT DETAILS**

8 Pin DIP Package

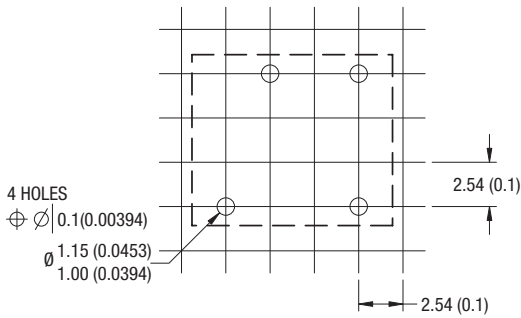


Unless otherwise stated all dimensions in inches (mm  $\pm 0.5$ mm).

4 Pin SIP Package

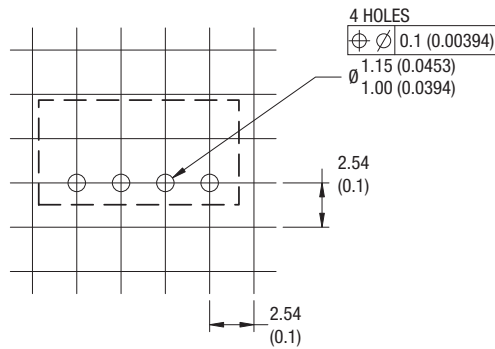


**TUBE OUTLINE DIMENSIONS**

8 Pin DIP Tube

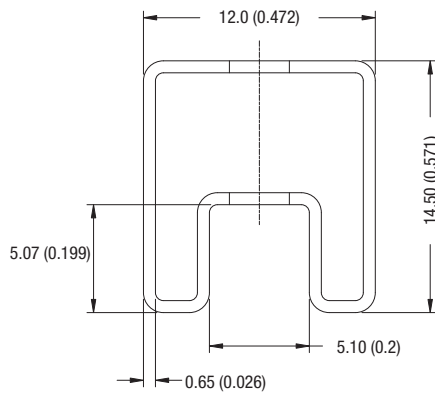

Unless otherwise stated all dimensions in inches (mm  $\pm 0.5$ mm).  
 Tube length (8 Pin DIP) : 20.47 (520mm  $\pm 2$ mm).  
 Tube length (4 Pin SIP) : 20.47 (520mm  $\pm 2$ mm).

4 Pin SIP Tube

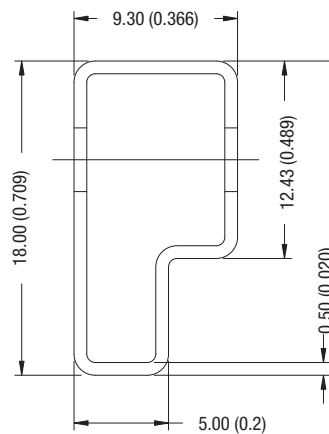

Tube Quantity : 35

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



This product is subject to the following **operating requirements** and the **Life and Safety Critical Application Sales Policy**:  
 Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
 © 2013 Murata Power Solutions, Inc.