

Sensing Solutions—Robust, Reliable Performance

# FXTH8715 High Pressure TPMS Family


## Tire Pressure Monitoring Sensors 100-1500 kPa

### Overview

Freescale's FXTH8715 high pressure family of tire pressure monitoring sensors (TPMS) is highly integrated with the smallest 7 x 7 mm package footprint on the market which has a 63% smaller footprint than Freescale's previous-generation of SOIC 20 package developed for truck applications. It also provides the lowest transmitting power consumption (less than 8 mA I<sub>dd</sub>), largest customer memory size (8 kB) currently available and unique dual-axis accelerometer architecture. Freescale's TPMS solution integrates an 8-bit microcontroller (MCU), pressure sensor, XZ-axis or Z-axis accelerometer and RF transmitter.

Freescale's portfolio with pressure ranges of 100-1500 kPa support s medium and heavy duty trucks, buses and construction vehicles for TPMS markets. These TPMS markets are mainly driven by improved safety and fleet management requirements.

### FXTH8715 TPMS Family Block Diagram

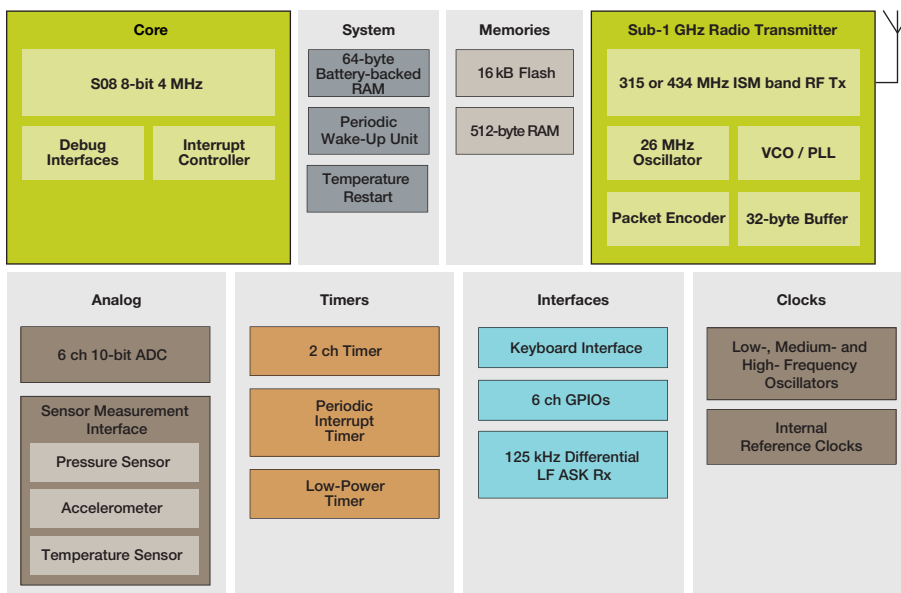

### Target Applications

- Tire pressure monitoring systems
- Ultra low-power wireless sensing

### Implementations

- Measures pressure typical for heavy duty vehicles (trucks, buses, construction vehicles)
- Measures dual-axis acceleration
- Measures temperature
- Measures battery voltage
- Bi-directional communication





## Product Specifications

Standard Part Number	P-cell Range (kPa)	Pressure Offset Accuracy (0° C to 70° C)	Axis of Acceleration	Z Range Sensitivity	Z-Offset Accuracy (-40° C to +125° C)	X Range	X-Offset Accuracy (-40° C to +125° C)
<b>Standard Tolerances</b>							
FXTH871502DT1	100-1500	±20 kPa	Z	-270 g/+350 g range, 40 g sensitivity	±6 g		
FXTH871511DT1	100-1500	±20 kPa	XZ	-210 g/+240 g range, 60 g sensitivity	±5 g	-70 g/+80 g range, 10 g sensitivity	±4 g
<b>Precision Tolerances</b>							
FXTH8715026T1	100-1500	±20 kPa	Z	-270 g/+350 g range, 40 g sensitivity	±3 g		
FXTH8715116T1	100-1500	±20 kPa	XZ	-210 g/+240 g range, 60 g sensitivity	±3 g	-70 g/+80 g range, 10 g sensitivity	±3 g
<b>High Precision Tolerances</b>							
FXTH8715027T1	100-1500	±17 kPa	Z	-270 g/+350 g range, 40 g sensitivity	±3 g		
FXTH8715117T1	100-1500	±17 kPa	XZ	-210 g/+240 g range, 60 g sensitivity	±3 g	-70 g/+80 g range, 10 g sensitivity	±3 g

## Features

- QFN 7 x 7 x 2.2 mm package enables visible solder joint for inspection
- 100–1500 kPa pressure range
- Z-axis or dual XZ-axis accelerometers
- Accelerometer standard or precision tolerances available
- High precision tolerance available for pressure
- Low-power wake-up timer and periodic reset driven by LFO
- Dedicated state machines for reduced power consumption
- 8-bit MCU/S08 core with SIM, interrupt and debug/monitor
- 512 Bytes RAM / 16 k Flash (8 k for Freescale library, 8 k for applications)
- Internal 315/434 MHz RF transmitter
- Internal 125 kHz LF receiver
- Six multipurpose GPIO pins (including two A/D inputs)

## Product Longevity Program

These products are/or may be supported by Freescale's Product Longevity Program. For Terms and Conditions and to obtain a list of available products please see:

[Freescale.com/productlongevity](http://Freescale.com/productlongevity)



Product Longevity



## Common Attributes

Voltage Measurement Range	1.8 V to 3.6 V
Voltage Resolution (8-bit)	10 mV / LSB
Voltage Accuracy (>2.1 V supply)	±100 mV
Temperature Measurement Range Run Mode	-40 °C to +125 °C
Temperature Resolution (8-bit unsigned)	1 °C / LSB
Temperature Offset Accuracy (-20 °C ≤ TA ≤ 70 °C)	±3 °C

## Product Differentiation

Features	Benefits
Tightest offset pressure accuracy	Enables predictive system implementation
Smallest package size	Enables smallest module design for lighter weight and space-constrained applications
Dual-axis XZ inertial sensor	Enables easier tire localization capability
8 kB customer memory/capability of interfacing with external memory	Flexibility of software development and time to market
Lowest RF power consumption	Longest battery life
High production capacity (QFN 7 x 7)	Secured supply and short lead time

## Documentation

Document Number	Title	Description
FXTH871xD	Tire Pressure Monitor Sensor Standard Tolerance Specification	Data Sheet
FXTH871x6	Tire Pressure Monitor Sensor Precision Tolerance Specification	Data Sheet
FXTH871x7	Tire Pressure Monitor Sensor for High Precision	Data Sheet
AN4391	Using the FXTH87 Family of LF Receivers for TPMS Application	Application Note
AN1902	Assembly Guidelines for QFN and DFN Packages	Application Note

## Freescale: A Leader in Sensing Solutions

Expanding on more than 35 years of sensor innovation, Freescale sensing solutions are designed with the right combination of high-performance sensing capability, processing capacity and customizable software to help deliver smart, differentiated sensing applications. With these sensing solutions, our vision is to offer a diverse and differentiated product portfolio to meet the expanding needs of the automotive, consumer and industrial segments. Freescale sensing solutions offer ideal blends of functionality and intelligence designed to help our customers differentiate and win in highly competitive market.

For more information, visit [freescale.com/TPMS](http://freescale.com/TPMS) and [freescale.com/pressure](http://freescale.com/pressure)

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. SMARTMOS is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © 2015 Freescale Semiconductor, Inc

Document Number: 1500FXTH87FS REV 0