


1	2	3	4	5	6	7	8	9	10
SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED	A	Housing	LCP UL94V-0 Black	E			
CLOSE		OPEN	B	Contact	Phosphor Bronze C5191, 0.15t, Contact Area:5u" Gold, Solder Area:Gold Flash	F			
			C	Switch	Phosphor Bronze C5191, 0.15t, Gold Flash	G			

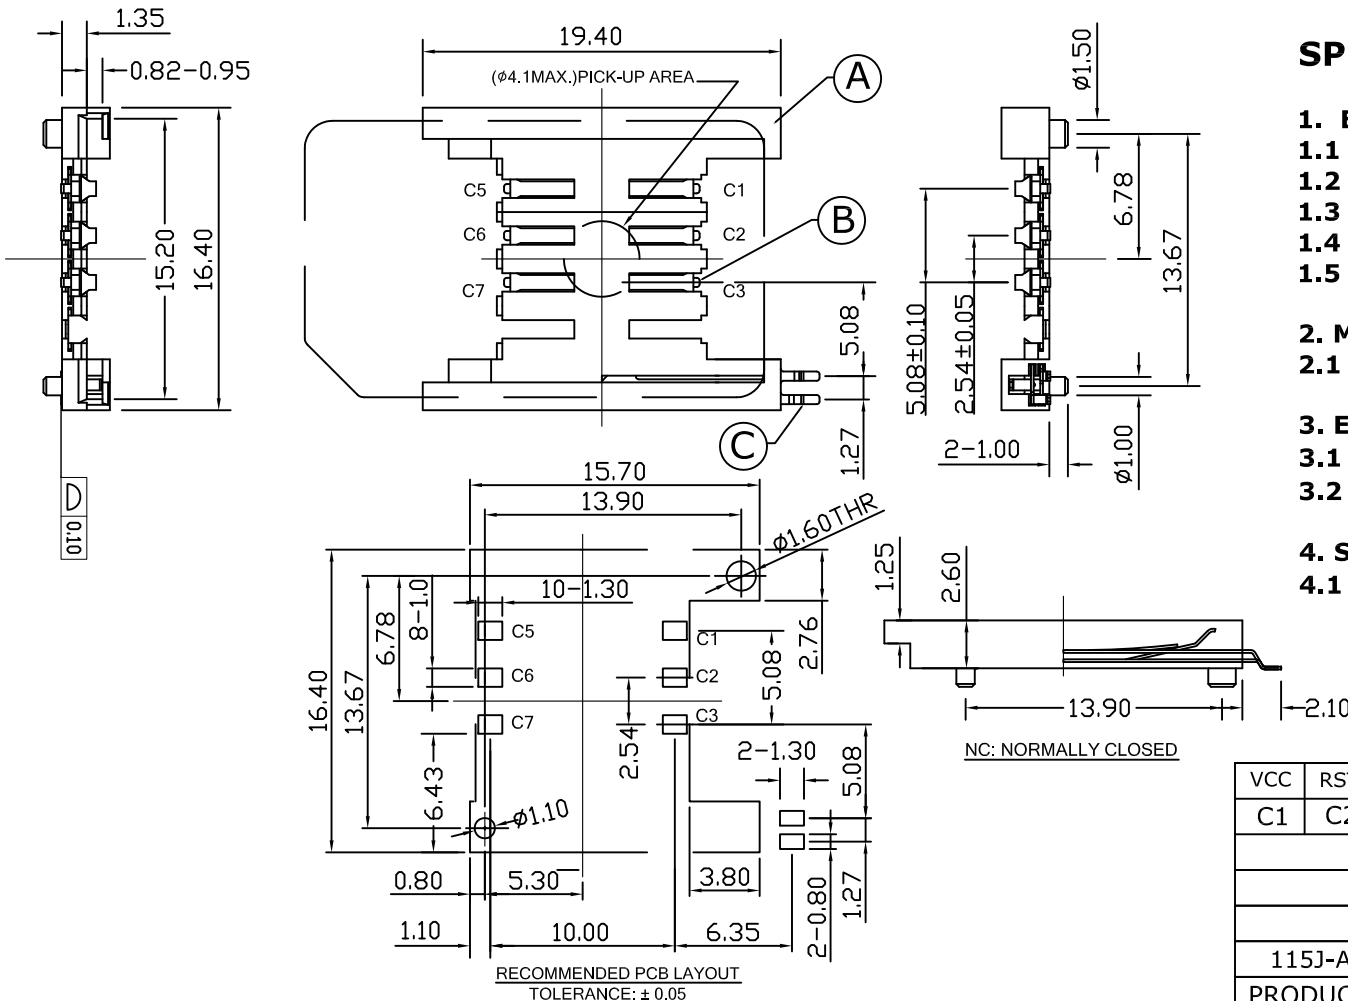

SPECIFICATION:

- ELECTRICAL**
 - Current Rating: 1.0A
 - Voltage Rating: 30V AC/DC
 - Contact Resistance: 50mΩ
 - Insulation Resistance: 1000MΩ
 - Dielectric Withstanding Voltage: 500VDC
- MECHANICAL**
 - Durability: 10000 Cycle
- ENVIRONMENTAL**
 - Operating temperature range: -40°C~+85°C
 - Storage temperature range: -40°C~+85°C
- SOLDER ABILITY**
 - Recommended IR Reflow Temperature: 260°C

VCC	RST	CLK	N/A	GND	VPP						
C1	C2	C3	C4	C5	C6						

PIN ASSIGNMENT

115J-ACC0		SIM Card 6Pin Socket Normally Close Switch , Contact Area:5u" Gold									
PRODUCT NO.	DESCRIPTION										

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2013/09/24
CHECKED	Angel	2013/09/24
APPROVED	Ken	2013/09/24



www.attend.com.tw

△	Revise:				
△	Revise:				
△	Revise:				

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1						A4	1.0	115J-ACC0_B_1