
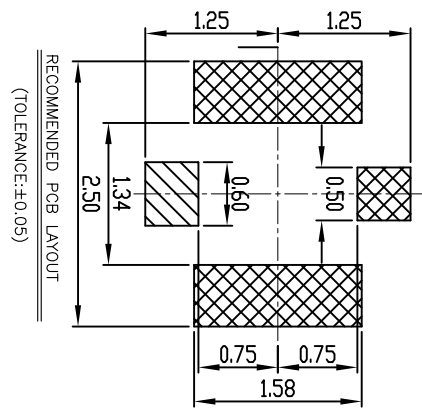

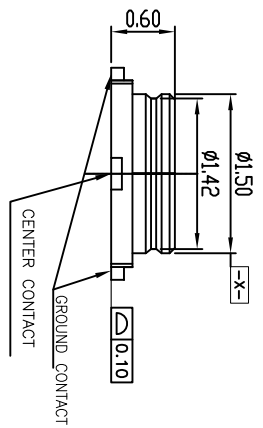



WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A	Housing	LCP U94V-0, Color: Black
		B	Contact	Brass C2680, Gold Flash
		C	Ground	Phosphor Bronze, Gold Flash
		D		

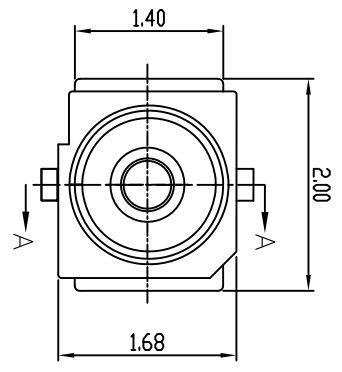

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 1A
- 1.2 Voltage Rating: 60VAC
- 1.3 Contact Resistance:
 - Inner Contact | Initially: 20mΩ
 - Ground Contact | Initially: 20mΩ

1.4 Insulation Resistance: 500MΩ

1.5 Dielectric Withstanding Voltage: 200VAC for 1 minute

- 1.6 VSWR: 100MHz to 3GHz | 1.3Max
- 3GHz to 6GHz | 1.45Max
- 6GHz to 12GHz | 2.0Max

1.7 Nominal Characteristic Impedance : 50Ω

1.8 Applicable Frequency: 100MHz to 12GHz

2. MECHANICAL

2.1 Durability: 30 Cycle

3. ENVIRONMENTAL

3.1 Operating temperature range: -40°C to +85°C

3.2 Storage temperature range: -40°C to +85°C

4. SOLDER ABILITY

4.1 Recommended IR Reflow Temperature: 260°C

DATE	DESCRIPTION	REV.	DATE	DESCRIPTION	REV.

PIN ASSIGNMENT

PRODUCT NO.	DESCRIPTION
MRF4	MRF1, Contact Area: Gold Flash

UNLESS OTHERWISE SPECIFIED TOLERANCE:	ANGLES	ANG.	±3°
LINEAR	0.	±0.3	
SCALE	0.0	±0.25	
SCALE	0.00	±0.20	



www.attend.com.tw

DRAWN NAME: Micro Coaxial RF Connector 0.6mm Height

DATE	DESCRIPTION	REV.	DATE	DESCRIPTION	REV.
2014/07/17	AS SHOWN		2014/07/17		
2014/07/17	W/IIIS		2014/07/17		
2014/07/17	ANGel		2014/07/17		
2014/07/17	Ken		2014/07/17		

DATE	DESCRIPTION	REV.	DATE	DESCRIPTION	REV.
2014/07/17	AS SHOWN		2014/07/17		
2014/07/17	W/IIIS		2014/07/17		
2014/07/17	ANGel		2014/07/17		
2014/07/17	Ken		2014/07/17		

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION
1				

PRODUCT NO.	DESCRIPTION
321C-22060	321C-22060_B_1