



M12 A-coded 3-pole, female straight connector
for technical details see DS 21035001003



Loading-Plan:

- 1 — brown
- 3 — blue
- 4 — black

- Protection level: IP67
- Temperature range: -25°C ... +80°C

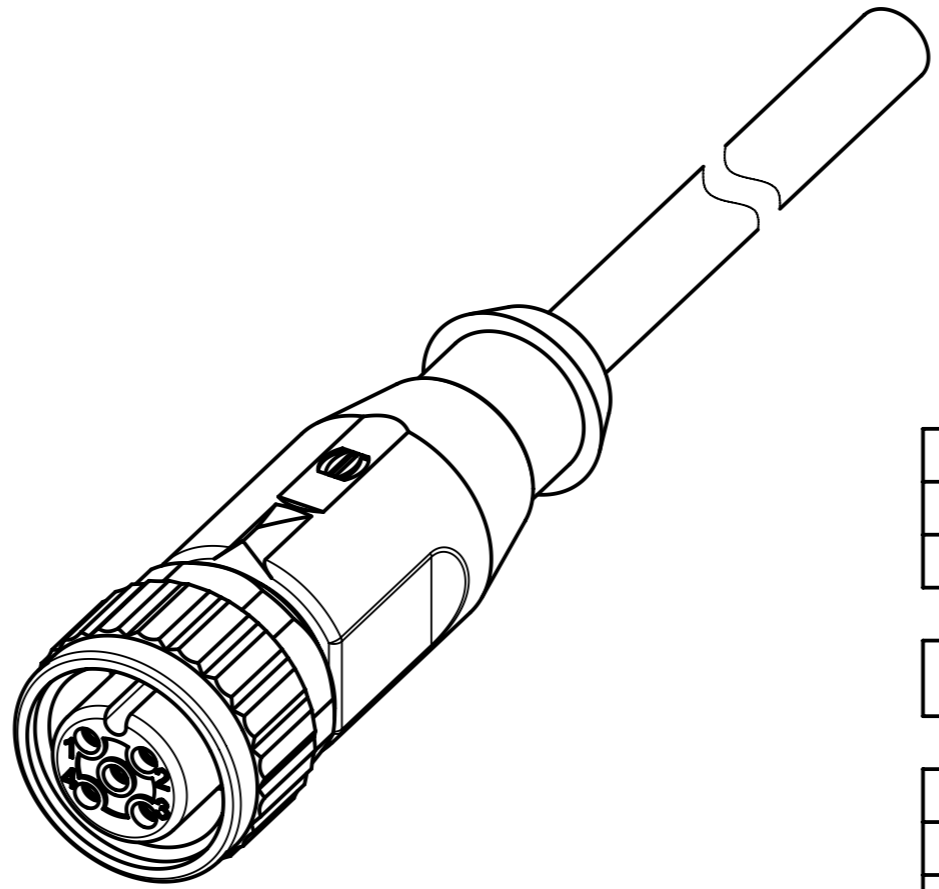

length in "1m" step	40	XXX=400
	39	XXX=390
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	XXX

4.0 to 40	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213485003XXX
----------	--------------

Type of cable	XX
PVC grey, 3x0.34mm ²	XX=83
PUR black, 3x0.34mm ²	XX=90

	All rights reserved	Created by	Inspected by	Standardisation	Date	State	
	Department EC PD - RO	POPESCUD	AVRAM	HOFFMANN	2015-12-17	Final Release	
HARTING Electronics GmbH		Title				Doc-Key / ECM-Nr.	
D-32339 Espelkamp		M12 A-coded Cable Assembly				100578791/UGD/009/B 50000098541	
Type	TB	Number				Rev.	Page
		213485003XXXXX				B	1/1