

EPIC® H-A 3 AG

Innovative metal and plastic housing design
Housing in plastic or metal version. For power supply in the smallest possible space



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Lightweight chemically resistant plastic housing

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Product features

Panel-mount base
1 lever
Included: flat gasket

Technical Data

Material:

Housing: powder-coated zinc die-casting, grey
Lever: zinc-plated steel
Sealing: NBR
Housing: grey thermoplastic, black
Lever: zinc-plated steel
Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:


-40°C to +100°C, short-term up to +125°C

VDE-tested:

Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

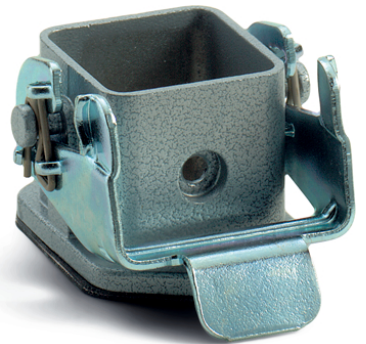

Note

Photographs are not to scale and do not represent detailed images of the respective products.



EPIC® H-A 3 AG

Part number	Article description	Colour	Material	Pieces / PU
H-A housing: panel-mount base (straight)				
10422500	H-A 3 Mag	grey	Zinc die-casting	10
10422200	H-A 3 Ag	black	Thermoplastic	10
10422000	H-A 3 Ag	grey	Thermoplastic	10

EPIC® H-A 3 AG

