

SL Low Profile (φ6.3) series



FPCAP

- Low ESR, High Capacitance, High ripple current.
- Low Profile(Height 4.2mm).
- Load life of 2000 hours at 105°C.
- SMD type : Lead free reflow soldering condition at 260°C peak correspondence.
- Compliant to the RoHS directive (2011/65/EU).



■ Specifications


| Item | Performance Characteristics | |
|-------------------------------|--|---|
| Category Temperature Range | -55 to +105°C | |
| Rated Voltage Range | 2.5 to 25V | |
| Rated Capacitance Range | 15 to 330μF | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | |
| Tangent of loss angle (tan δ) | Less than or equal to the specified value at 120Hz, 20°C | |
| ESR (*1) | Less than or equal to the specified value at 100kHz, 20°C | |
| Leakage Current (*2) | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C | |
| Endurance | Test condition | 105°C, rated voltage 2000Hrs. |
| | Capacitance change | Within ±20% of initial value before test |
| | tan δ | 150% or less than the initial specified value |
| | ESR(*1) | 150% or less than the initial specified value |
| | Leakage current (*2) | Less than or equal to the initial specified value |

※1 ESR should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform.

※2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

■ Size List (ESR) [Upper value : φD×L(mm), Lower value : ESR(mΩ)]

| Cap [μF] | R.V.(V) | 2.5 | 6.3 | 16 | 25 |
|----------|---------|--------------|--------------|--------------|--------------|
| | S.V.(V) | 2.8 | 7.2 | 18.4 | 28.7 |
| 15 | | | | 6.3×4.2 (45) | 6.3×4.2 (55) |
| 100 | | 6.3×4.2 (16) | 6.3×4.2 (18) | | |
| 150 | | | 6.3×4.2 (18) | | |
| 220 | | 6.3×4.2 (16) | 6.3×4.2 (18) | | |
| 330 | | 6.3×4.2 (16) | | | |

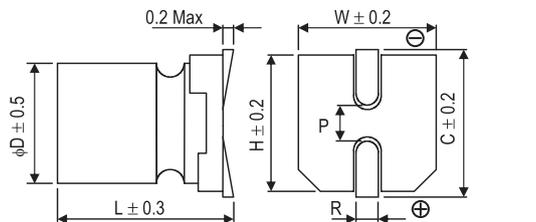



| φD×L | W | H | C | R | P |
|---------|-----|-----|-----|------------|-----|
| 6.3×4.2 | 6.5 | 6.5 | 7.2 | 0.5 to 0.9 | 2.1 |



■ Standard Ratings

| Rated Voltage (V) (code) | Surge Voltage (V) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA, 2min.) | ESR (mΩ, 100kHz) | Rated Ripple Current (mA rms) | NICHICON | FPCAP |
|--------------------------|-------------------|------------------------|---------------------|-------|-----------------------------|------------------|-------------------------------|----------------|------------------|
| 2.5 (0E) | 2.8 | 100 | 6.3×4.2 | 0.12 | 300 | 16 | 3500 | RSL0E101MCN1GB | FP-2R5ME101M-SLR |
| | | 220 | 6.3×4.2 | 0.12 | 300 | 16 | 3500 | RSL0E221MCN1GB | FP-2R5ME221M-SLR |
| | | 330 | 6.3×4.2 | 0.12 | 413 | 16 | 3500 | RSL0E331MCN1GB | FP-2R5ME331M-SLR |
| 6.3 (0J) | 7.2 | 100 | 6.3×4.2 | 0.12 | 315 | 18 | 3200 | RSL0J101MCN1GB | FP-6R3ME101M-SLR |
| | | 150 | 6.3×4.2 | 0.12 | 473 | 18 | 3200 | RSL0J151MCN1GB | FP-6R3ME151M-SLR |
| | | 220 | 6.3×4.2 | 0.12 | 693 | 18 | 3200 | RSL0J221MCN1GB | FP-6R3ME221M-SLR |
| 16 (1C) | 18.4 | 15 | 6.3×4.2 | 0.12 | 300 | 45 | 1900 | RSL1C150MCN1GB | FP-016ME150M-SLR |
| 25 (1E) | 28.7 | 15 | 6.3×4.2 | 0.12 | 100 | 55 | 1700 | RSL1E150MCN1GB | FP-025ME150M-SLR |

■ Frequency Characteristics (The frequency characteristics are typical and not a guaranteed value.)

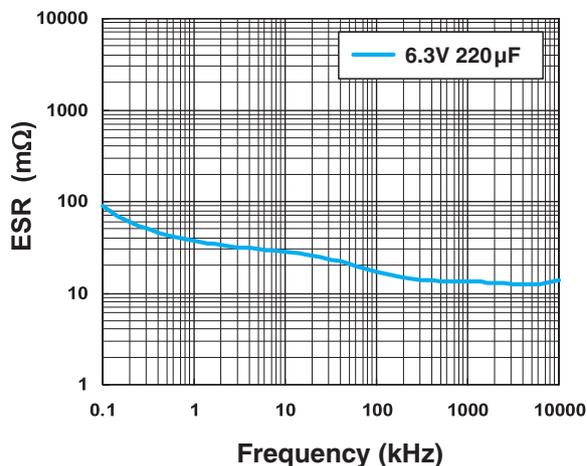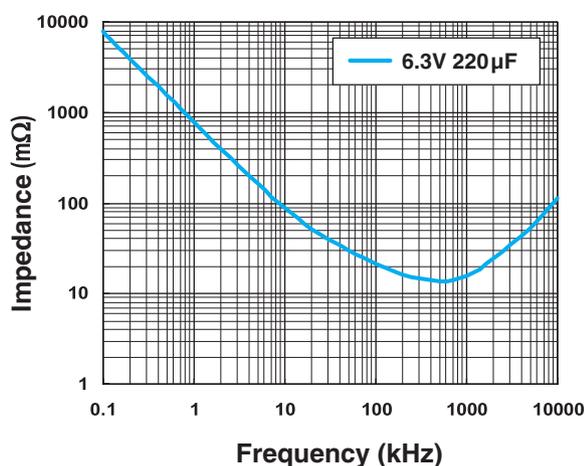

- Taping specifications are given in page 28.
- Recommended land size, soldering by reflow are given in page 25.
- Please refer to page 3 for the minimum order quantity.