

# 200 Series

## Brown Devil® Vitreous Enamel Power



Ohmite's Brown Devil® is a small, exceptionally durable power resistor. It features all-welded construction and rugged, flame resistant conformal lead free vitreous enamel coating to ensure successful performance under high temperatures.

The wirewound 200 Series has a hollow-core construction, which accommodates rigid mounting with brackets or thru bolts.

Mounting brackets not included with resistors.



### FEATURES

- Rugged lead free vitreous enamel coating
- All-welded construction.
- Self supporting terminal mounting option.
- Higher power ratings.
- Flame-resistant lead free vitreous enamel coating.
- RoHS compliant product available. Add "E" suffix to part number to specify.

### SERIES SPECIFICATIONS

Series	Wattage	Ohms	Lead Gauge	Max. Voltage*
B5	5.25	0.1-20K	20	187
B8	8.0	0.03-25K	18	250
B12	12.0	0.08-51K	18	625
B20	20.0	0.1-100K	18	750

Non-Inductive versions available. Insert "N" before tolerance code.

Example: B5NJ10RE

Also available in low cost Centohm or Silicone coating. Consult Ohmite.

\* Maximum Voltage is based on Ohm's Law  $[V=\sqrt{P \cdot R}]$  as limited by the resistance value of specified product

### CHARACTERISTICS

<b>Coating</b>	lead-free vitreous enamel
<b>Core</b>	Ceramic
<b>Terminals</b>	Tinned axial; RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu
<b>Derating</b>	Linearly from 100% @ +25°C to 0% @ +350°C
<b>Tolerance</b>	1Ω+: ±5% under 1Ω: ±10%
<b>Power rating</b>	Based on 25°C free air rating
<b>Overload</b>	10 times rated wattage for 5 seconds
<b>Temperature coefficient</b>	5Ω and under: ±400 ppm/°C Above 5Ω: ±260 ppm/°C
<b>Max. amps</b>	To calculate, use the formula $\sqrt{P/R}$


(continued)

# 200 Series

## Brown Devil® Vitreous Enamel Power

### DIMENSIONS

(in. / mm)

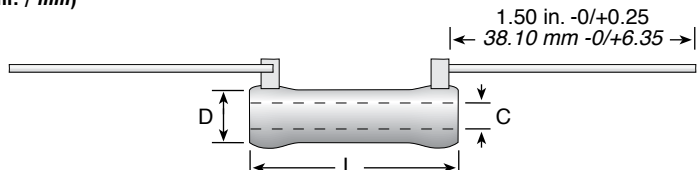

Series	Wattage	L	D	C	Lead Gauge
B5	5.25	0.625 / 15.88	0.250 / 6.35	0.135 / 3.43	20
B8	8.0	1.000 / 25.40	0.313 / 7.94	0.188 / 4.76	18
B12	12.0	1.750 / 44.45	0.313 / 7.94	0.188 / 4.76	18
B20	20.0	2.000 / 50.80	0.438 / 11.11	0.250 / 6.35	18

### ORDERING INFORMATION


#### Standard Values

Ohmic value	Part No. Prefix > Suffix <	Wattage				Ohmic value	Part No. Prefix > Suffix <	Wattage				Ohmic value	Part No. Prefix > Suffix <	Wattage				Ohmic value	Part No. Prefix > Suffix <	Wattage						
		5.25	8	12	20			5.25	8	12	20			5.25	8	12	20			5.25	8	12	20	5.25	8	12
0.5	R50E			✓	✓	20	20RE	✓	✓			270	270E	✓				2,250	2K25E	✓	✓	16,000	16KE			✓
1	1R0E	✓	✓	✓	✓	22	22RE	✓	✓			300	300E	✓	✓			2,400	2K4E			17,500	17K5E	✓	✓	
1.1	1R1E					24	24RE	✓				330	330E	✓				2,500	2K5E	✓	✓	18,000	18KE			✓
1.2	1R2E					25	25RE		✓	✓		350	350E		✓	✓		2,700	2K7E	✓		20,000	20KE	✓	✓	✓
1.3	1R3E					27	27RE	✓				360	360E					2,750	2K75E		✓	22,500	22K5E			✓
1.5	1R5E	✓	✓	✓	✓	30	30RE	✓	✓	✓		390	390E	✓				3,000	3K0E	✓	✓	25,000	25KE		✓	✓
1.6	1R6E	✓	✓	✓	✓	33	33RE	✓	✓	✓		400	400E		✓	✓		3,300	3K3E	✓	✓	30,000	30KE			✓
1.8	1R8E	✓				35	35RE		✓	✓		430	430E					3,500	3K5E	✓	✓	35,000	35KE	✓	✓	✓
2	2R0E	✓	✓	✓	✓	36	36RE					450	450E		✓	✓		3,600	3K6E			40,000	40KE			✓
2.2	2R2E					39	39RE	✓				470	470E	✓				3,900	3K9E	✓		45,000	45KE			✓
2.4	2R4E	✓				40	40RE	✓	✓	✓		500	500E	✓	✓	✓		4,000	4K0E	✓	✓	50,000	50KE		✓	✓
2.7	2R7E	✓				43	43RE	✓	✓	✓		510	510E	✓				4,300	4K3E			55,000	55KE			✓
3	3R0E	✓	✓	✓	✓	47	47RE	✓				560	560E	✓				4,500	4K5E	✓	✓	60,000	60KE			✓
3.3	3R3E	✓				50	50RE	✓	✓	✓		600	600E		✓	✓		4,700	4K7E	✓		65,000	65KE	✓	✓	✓
3.6	3R6E	✓				51	51RE	✓				620	620E	✓				5,000	5K0E	✓	✓	70,000	70KE			✓
3.9	3R9E	✓				56	56RE	✓				650	650E			✓		5,100	5K1E	✓		75,000	75KE			✓
4	4R0E	✓	✓	✓	✓	62	62RE	✓				680	680E	✓				5,600	5K6E	✓		80,000	80KE			✓
4.3	4R3E	✓				68	68RE	✓				700	700E		✓	✓		6,000	6K0E	✓	✓	85,000	85KE			✓
4.7	4R7E	✓				75	75RE	✓	✓	✓		750	750E	✓	✓	✓		6,200	6K2E	✓		90,000	90KE			✓
5	5R0E	✓	✓	✓	✓	82	82RE	✓				800	800E	✓	✓	✓		6,800	6K8E	✓		95,000	95KE			✓
5.1	5R1E	✓				91	91RE	✓				820	820E	✓				7,000	7K0E	✓	✓	100,000	100KE			✓
5.6	5R6E	✓				100	100E	✓	✓	✓		900	900E		✓	✓		7,500	7K5E	✓	✓					✓
6.2	6R2E	✓				110	110E					910	910E					8,000	8K0E	✓	✓					✓
6.8	6R8E	✓				120	120E	✓				1,000	1K0E	✓	✓	✓		8,200	8K2E	✓						✓
7.5	7R5E	✓	✓	✓	✓	125	125E	✓	✓	✓		1,100	1K1E	✓	✓			8,500	8K5E		✓					✓
8.2	8R2E	✓				130	130E	✓		✓		1,200	1K2E	✓	✓	✓		9,000	9K0E	✓	✓					✓
9.1	9R1E	✓				150	150E	✓	✓	✓		1,250	1K25E	✓	✓	✓		9,100	9K1E							✓
10	10RE	✓	✓	✓	✓	160	160E	✓				1,300	1K3E	✓				10,000	10KE	✓	✓					✓
11	11RE	✓				180	180E	✓				1,500	1K5E	✓	✓	✓		11,000	11KE		✓					✓
12	12RE	✓	✓	✓	✓	200	200E	✓	✓	✓		1,600	1K6E	✓	✓	✓		12,000	12KE	✓	✓					✓
13	13RE	✓				220	220E	✓	✓	✓		1,750	1K75E	✓	✓	✓		12,500	12K5E	✓	✓					✓
15	15RE	✓	✓	✓	✓	225	225E		✓			1,800	1K8E					13,000	13KE	✓						✓
16	16RE	✓				240	240E	✓				2,000	2K0E	✓	✓	✓		13,500	13K5E		✓					✓
18	18RE	✓				250	250E	✓	✓	✓		2,200	2K2E	✓				15,000	15KE	✓	✓					✓


✓ = Standard values; check availability at [www.ohmite.com](http://www.ohmite.com)

These values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling:

B5: 6.8K-20KΩ  
 B8: 12.5K-25KΩ  
 B12: 30K-51KΩ  
 B20: 22.5K-100KΩ

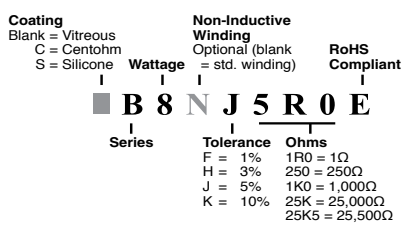

#### Made-to-order Parts

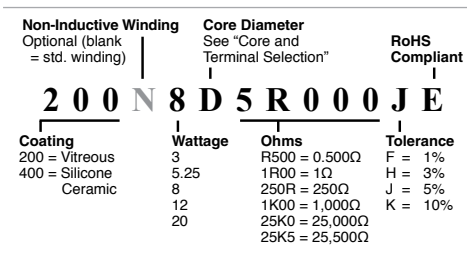

See website for custom core info