

ZIF Slide-locking Connector (0.5-mm pitch)

XF2L

Greater Freedom of Board Design with Smallest On-board Area in Industry

- Smallest on-board area and volume in the industry.
- Low on-board profile of only 1.2 mm max.
- Bottom wall prevents terminal exposure.
- Applicable FPC thickness of 0.3 mm.
- Halogen Free (See note)

Note: OMRON uses the following standard to determine halogen-free construction: 900 ppm max. for Br, 900 ppm max. for Cl, and 1,500 ppm max. for Br+Cl.

- RoHS Compliant.



Ordering Information

Upper Contact

Pins	Model	Qty per reel (See Note)
4	XF2L-0425-1A	3,000
6	XF2L-0625-1A	
7	XF2L-0725-1A	
8	XF2L-0825-1A	
9	XF2L-0925-1A	
10	XF2L-1025-1A	
12	XF2L-1225-1A	
13	XF2L-1325-1A	
18	XF2L-1825-1A	
21	XF2L-2125-1A	
26	XF2L-2625-1A	
30	XF2L-3025-1A	

Lower Contact

Pins	Model	Qty per reel (See Note)
5	XF2L-0535-1A	3,000
6	XF2L-0635-1A	
7	XF2L-0735-1A	
8	XF2L-0835-1A	
10	XF2L-1035-1A	
12	XF2L-1235-1A	
13	XF2L-1335-1A	
15	XF2L-1535-1A	
18	XF2L-1835-1A	
19	XF2L-1935-1A	
20	XF2L-2035-1A	
22	XF2L-2235-1A	
24	XF2L-2435-1A	
30	XF2L-3035-1A	

Note: Please order by integer multiple of the quantity per reel.

Ratings and Specifications

■ Characteristics

Rated current	0.5A AC/DC
Rated voltage	50V AC/DC
Contact resistance	30 mΩ max. (at 20 mV DC max., 100 mA max.)
Insulation resistance	100 MΩ min. (at 250 VDC)
Withstand voltage	250 VAC for 1 min. (leakage current: 1 mA max.)
Insertion tolerance	20 times
Ambient operating temperature	-30 to 85°C (with no icing or condensation)


■ Materials and Finish

	Model	XF2L - Upper contact type	XF2L - Lower contact type
Housing		LCP resin (UL94V-0)/natural	
Slider		LCP resin (UL94V-0)/black	LCP resin (UL94V-0)/brown
Contacts		Spring copper alloy/nickel substrate (2 μm), Gold-plated contacts (0.15 μm)	
Hold-down		Spring copper alloy/fused-tin plating (1.5 μm)	

Dimensions

Unit: mm

XF2L-□□□5-1A

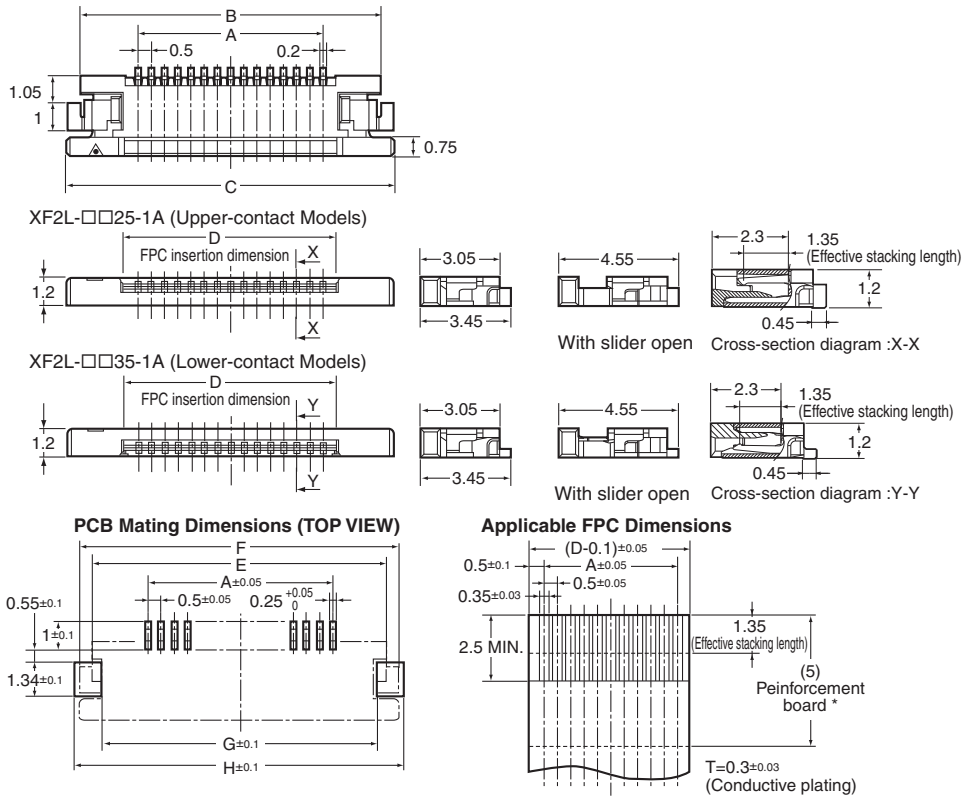

* Use polyimide and thermoset adhesive for reinforcement film material.

Table of Dimensions

Pins	Upper Contact	Lower Contact	A	B	C	D	E	F	G	H
4	XF2L-0425-1A	---	1.5	5.9	6.9	2.6	5.88	6.88	5.28	7.28
5	---	XF2L-0535-1A	2.0	6.4	7.4	3.1	6.38	7.38	5.78	7.78
6	XF2L-0625-1A	XF2L-0635-1A	2.5	6.9	7.9	3.6	6.88	7.88	6.28	8.28
7	XF2L-0725-1A	XF2L-0735-1A	3.0	7.4	8.4	4.1	7.38	8.38	6.78	8.78
8	XF2L-0825-1A	XF2L-0835-1A	3.5	7.9	8.9	4.6	7.88	8.88	7.28	9.28
9	XF2L-0925-1A	---	4.0	8.4	9.4	5.1	8.38	9.38	7.78	9.78
10	XF2L-1025-1A	XF2L-1035-1A	4.5	8.9	9.9	5.6	8.88	9.88	8.28	10.28
12	XF2L-1225-1A	XF2L-1235-1A	5.5	9.9	10.9	6.6	9.88	10.88	9.28	11.28
13	XF2L-1325-1A	XF2L-1335-1A	6.0	10.4	11.4	7.1	10.38	11.38	9.78	11.78
15	---	XF2L-1535-1A	7.0	11.4	12.4	8.1	11.38	12.38	10.78	12.78
18	XF2L-1825-1A	XF2L-1835-1A	8.5	12.9	13.9	9.6	12.88	13.88	12.28	14.28
19	---	XF2L-1935-1A	9.0	13.4	14.4	10.1	13.38	14.38	12.78	14.78
20	---	XF2L-2035-1A	9.5	13.9	14.9	10.6	13.88	14.88	13.28	15.28
21	XF2L-2125-1A	---	10.0	14.4	15.4	11.1	14.38	15.38	13.78	15.78
22	---	XF2L-2235-1A	10.5	14.9	15.9	11.6	14.88	15.88	14.28	16.28
24	---	XF2L-2435-1A	11.5	15.9	16.9	12.6	15.88	16.88	15.28	17.28
26	XF2L-2625-1A	---	12.5	16.9	17.9	13.6	16.88	17.88	16.28	18.28
30	XF2L-3025-1A	XF2L-3035-1A	14.5	18.9	19.9	15.6	18.88	19.88	18.28	20.28



All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]
**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173
847-882-2288

OMRON ON-LINE
Global - <http://www.omron.com>
USA - <http://www.components.omron.com>