



**FEATURES**


- Best space savings in its class.
- Large capacity switching despite small size. Can replace micro ISO terminal type relays.
- Terminals for PC board pattern designs are easily allocated.
- Sealed type

**TYPICAL APPLICATIONS**

Head lamp, Fog lamp, Fan motor, EPS, Defogger, Seat heater, etc.

RoHS compliant

**ORDERING INFORMATION**

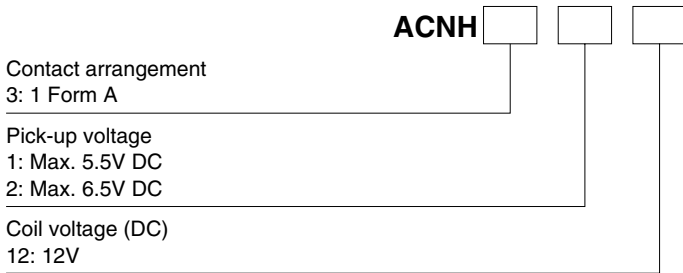

**TYPES**

| Contact arrangement | Nominal coil voltage | Pick-up voltage (at 20°C 68°F) |                         | Part No. |
|---------------------|----------------------|--------------------------------|-------------------------|----------|
|                     |                      | Max. 6.5 V DC (Initial)        | Max. 5.5 V DC (Initial) |          |
| 1 Form A            | 12V DC               |                                |                         | ACNH3212 |
|                     |                      |                                |                         | ACNH3112 |

Standard packing; Carton (tube): 50 pcs.; Case: 1,000 pcs.

**RATING**

**1. Coil data**

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F) | Drop-out voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power (at 20°C 68°F) | Usable voltage range |
|----------------------|--------------------------------|---------------------------------|---|---------------------------------------|--|----------------------|
| 12 V DC              | Max. 6.5 V DC (Initial)        | Min. 1.0 V DC (Initial)         | 37.5 mA   | 320Ω                                  | 450 mW                                 |                      |
|                      | Max. 5.5 V DC (Initial)        | Min. 0.8 V DC (Initial)         | 53.3 mA   | 225Ω                                  | 640 mW                                 |                      |

## 2. Specifications


| Characteristics                   | Item  | Specifications   |  |
|-----------------------------------|---|--|--|
| Contact                           | Arrangement   | 1 Form A   |  |
|                                   | Contact resistance (Initial)                                    | Typ5mΩ (By voltage drop 6 V DC 1 A)  |  |
|                                   | Contact material  | Ag alloy (Cadmium free)  |  |
| Rating                            | Nominal switching capacity (resistive load)                     | 30A 14V DC   |  |
|                                   | Max. carrying current   | <450mW><br>35A/1 h, 45A/2 min. at 20°C 68°F<br>30A/1 h, 40A/2 min. at 85°C 185°F<br>25A/1 h, 35A/2 min. at 110°C 230°F   |  |
|                                   |   | <640mW><br>30A/1 h, 40A/2 min. at 20°C 68°F<br>25A/1 h, 35A/2 min. at 85°C 185°F<br>20A/1 h, 30A/2 min. at 110°C 230°F   |  |
|                                   |   | Continuous carrying current  | 20A 14V DC (450mW) at 110°C 230°F, 15A 14V DC (640mW) at 110°C 230°F   |
|                                   | Nominal operating power   | 450 mW (for pick-up voltage max. 6.5 V DC), 640 mW (for pick-up voltage max. 5.5 V DC)   |  |
|                                   | Min. switching capacity (resistive load)*1                      | 1A 14V DC  |  |
| Electrical characteristics        | Insulation resistance (Initial)                                 | Min. 100 MΩ (at 500V DC, Measurement at same location as "Breakdown voltage" section.)   |  |
|                                   | Breakdown voltage (Initial)                                     | Between open contacts  | 500 Vrms for 1 min. (Detection current: 10mA)  |
|                                   |   | Between contacts and coil  | 500 Vrms for 1 min. (Detection current: 10mA)  |
|                                   | Operate time (at nominal voltage)                               | Max. 10ms (at 20°C 68°F, excluding contact bounce time) (Initial)  |  |
| Release time (at nominal voltage) | Max. 10ms (at 20°C 68°F) (Initial) (without protective element) |  |  |
| Mechanical characteristics        | Shock resistance  | Functional   | Min. 100 m/s <sup>2</sup> {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)   |
|                                   |   | Destructive  | Min. 1,000 m/s <sup>2</sup> {100G} (Half-wave pulse of sine wave: 6ms)   |
|                                   | Vibration resistance  | Functional   | 10 Hz to 100 Hz, Min. 44.1m/s <sup>2</sup> {4.5G} (Detection time: 10μs)   |
|                                   |   | Destructive  | 10 Hz to 500 Hz, Min. 44.1m/s <sup>2</sup> {4.5G}<br>Time of vibration for each direction; X, Y direction: 2 hours, Z direction: 4 hours |
| Expected life                     | Mechanical  | Min. 10 <sup>7</sup> (at 120 cpm)  |  |
|                                   | Electrical  | <Resistive load><br>Min. 10 <sup>5</sup> (at nominal switching capacity, operating frequency: 1s ON, 1s OFF)<br><Motor load><br>Min. 3×10 <sup>5</sup> (at inrush 84 A, steady 18 A, 14 V DC operating frequency: ON 2s, OFF 5s)<br><Lamp load><br>Min. 2×10 <sup>5</sup> (at inrush 84 A, steady 12 A, 14 V DC operating frequency: ON 1s, OFF 14s) |  |
| Conditions                        | Conditions for operation, transport and storage                 | Ambient temperature: -40°C to +110°C -40°F to +230°F<br>Humidity: 2% R.H. to 85% R.H. (Not freezing and condensing at low temperature)   |  |
| Mass                              |   | Approx. 9 g .32 oz   |  |

Note: \*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

## REFERENCE DATA


### 1-(1). Coil temperature rise

Sample: ACNH3212, 3pcs  
Measured portion: Inside the coil  
Contact carrying current: 10A, 20A, 30A  
Ambient temperature: 25°C 77°F

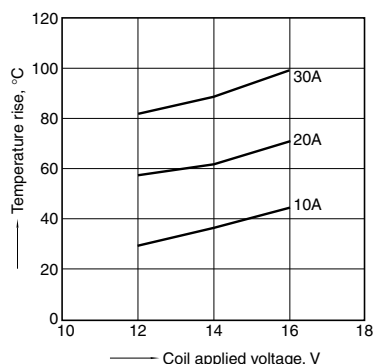


### 1-(2). Coil temperature rise

Sample: ACNH3212, 3pcs  
Measured portion: Inside the coil  
Contact carrying current: 10A, 20A  
Ambient temperature: 110°C 230°F

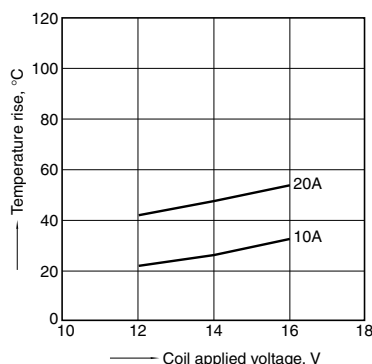


### 2. Ambient temperature and operating voltage range

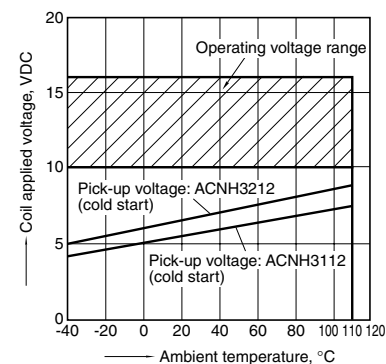

# CN-H (ACNH)


## 3-(1). Distribution of pick-up and drop-out voltage

Sample: ACNH3212, 20pcs.

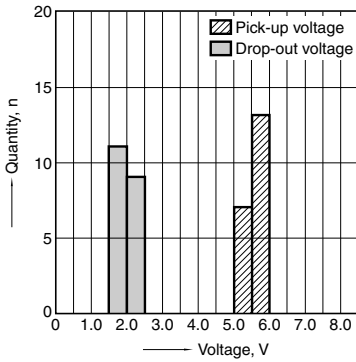


## 3-(2). Distribution of pick-up and drop-out voltage

Sample: ACNH3112, 20pcs.

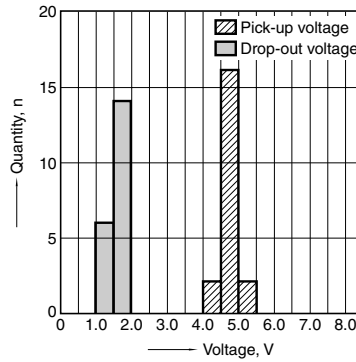


## 4-(1). Distribution of operate and release time

Sample: ACNH3212, 20pcs.

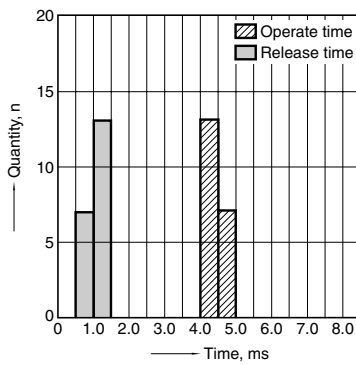

## 4-(2). Distribution of operate and release time

Sample: ACNH3112, 20pcs.

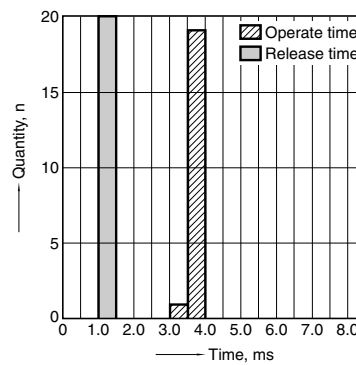

## 5. Electrical life test (Resistive load)


Sample: ACNH3212, 6pcs.

Load: Resistive load (NO side: 30A 14V DC)


Operating frequency: ON 1s, OFF 1s

Ambient temperature: Room temperature


Circuit:



## Change of pick-up and drop-out voltage

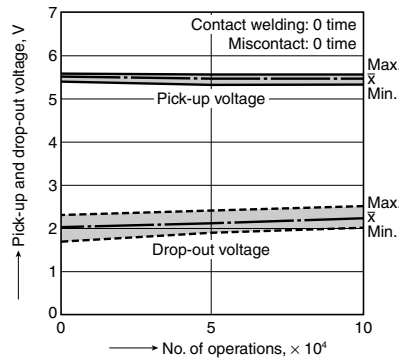

## Change of contact resistance

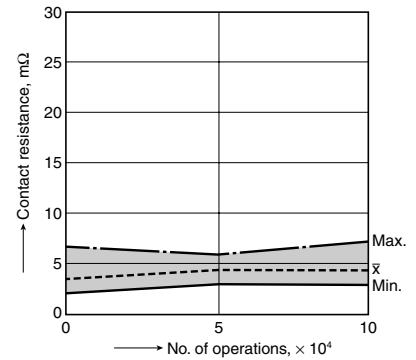

## 6-(1). Electrical life test (Motor load)


Sample: ACNH3212, 3pcs.

Load: inrush: 84A/steady: 18A, radiator fan actual load (motor free)


Operating frequency: ON 2s, OFF 5s

Ambient temperature: 110°C 230°F


Circuit:



## Change of pick-up and drop-out voltage

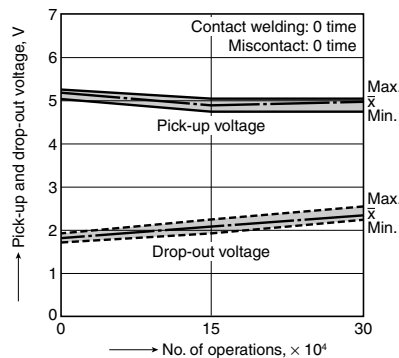


## Change of contact resistance

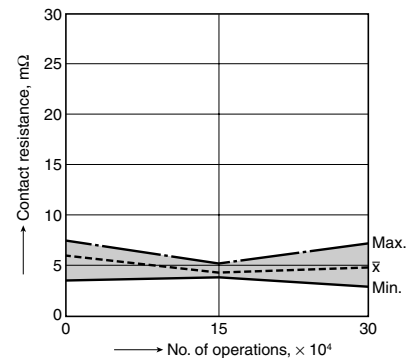


6-(2). Electrical life test (Lamp load)  
 Sample: ACNH3212, 6pcs.  
 Load: 60W×2, inrush: 84A/steady: 12A  
 Operating frequency: ON 1s, OFF 14s  
 Ambient temperature: Room temperature


Circuit:



Change of pick-up and drop-out voltage

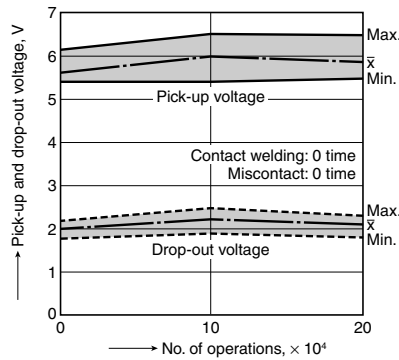


Change of contact resistance

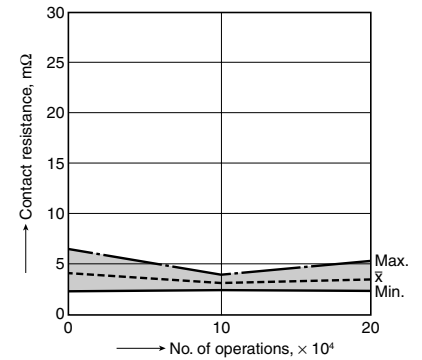


## DIMENSIONS (mm inch)

External dimensions

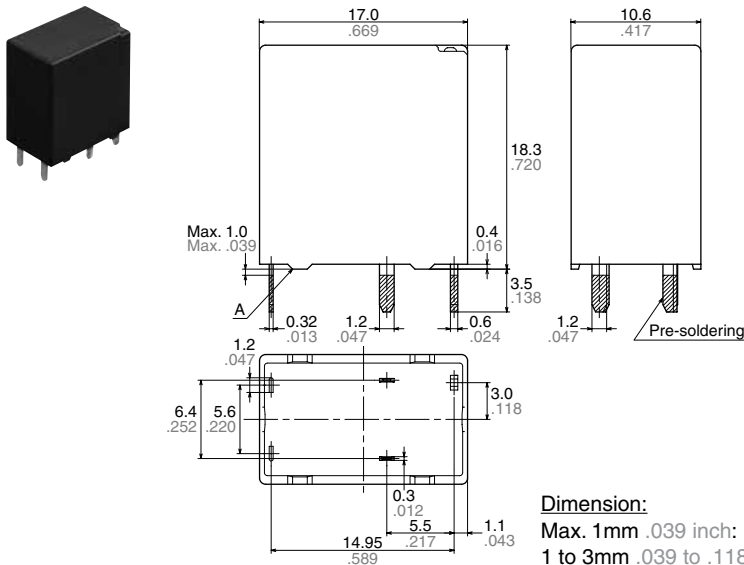


PC board pattern (Bottom view)

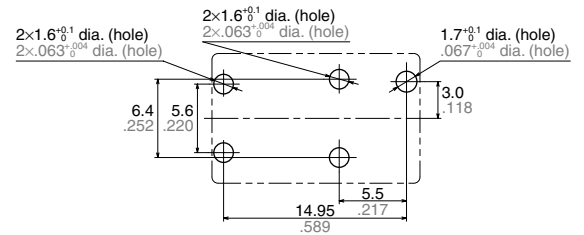

Tolerance: ±0.1 ±0.04

Schematic (Bottom view)



**Dimension:**

Max. 1mm .039 inch:  
 1 to 3mm .039 to .118 inch:  
 Min. 3mm .118 inch:

**General tolerance**

±0.1 ±0.04  
 ±0.2 ±0.08  
 ±0.3 ±0.12

\* Dimensions (thickness and width) of terminal is measured before pre-soldering.  
 Intervals between terminals is measured at A surface level.

## NOTES

### Usage, transport and storage conditions

1) Ambient temperature, humidity, and atmospheric pressure during usage, transport, and storage of the relay:


(1) Temperature:  
 -40 to +110°C -40 to +230°F

(2) Humidity: 2 to 85% RH  
 (Avoid freezing and condensation.)

(3) Atmospheric pressure: 86 to 106 kPa

The humidity range varies with the temperature. Use within the range indicated in the graph below.

(Temperature and humidity range for usage, transport, and storage)

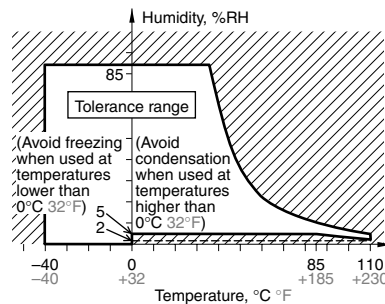

For general cautions for use, please refer to the “CAUTIONS FOR USE OF AUTOMOTIVE RELAYS”