


DIP6-pin type suited for  
radio frequent switching

PhotoMOS®  
RF 1 Form A  
(AQV22O)

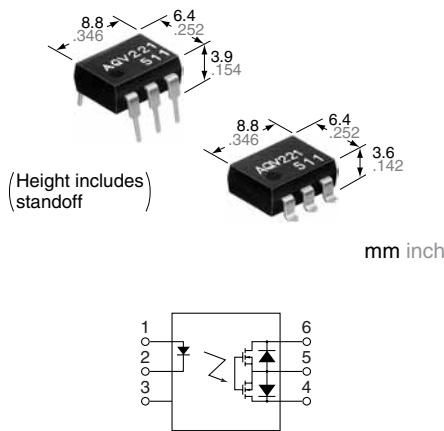

## FEATURES

**1. High frequency characteristics with low capacitance between output terminals**

Low output capacitance: typ. 4.8 pF  
Isolation loss: 40 dB or more (at 1 MHz)  
(AQV225)

**2. High speed switching**

Turn on time: typ. 0.1 ms  
Turn off time: typ. 0.03 ms

**3. Low-level off state leakage current of typ. 0.03 nA**

**4. Controls low-level analog signals**  
PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

## TYPICAL APPLICATIONS

**1. Measuring instruments**

Scanner, IC checker, Board tester, etc.

**2. Audio visual equipment**

CD, VCR

**3. Security equipment**

**RoHS compliant**

## TYPES

	Output rating*		Package	Part No.				Packing quantity		
	Load voltage	Load current		Through hole terminal		Surface-mount terminal				
				Tube packing style		Tape and reel packing style				
				Picked from the 1/2/3-pin side		Picked from the 4/5/6-pin side				
AC/DC dual use	40 V	80 mA	DIP6-pin	AQV221	AQV221A	AQV221AX	AQV221AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.		
	80 V	50 mA		AQV225	AQV225A	AQV225AX	AQV225AZ			

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

## RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA		
	LED reverse voltage		5 V		
	Peak forward current		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation		75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	40 V	80 V	
	Continuous load current	I <sub>L</sub>	A	0.08 A	0.05 A
			B	0.09 A	0.06 A
			C	0.12 A	0.075 A
	Peak load current	I <sub>peak</sub>	0.18 A		A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	230 mW		
			280 mW		
Total power dissipation	P <sub>T</sub>		1,500 V AC		
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F		

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED operate current	Typical	$I_{Fon}$	—	0.9 mA		$I_L = \text{Max.}$
		Maximum			3 mA		
	LED turn off current	Minimum	$I_{Foff}$	—	0.4 mA		$I_L = \text{Max.}$
		Typical			0.85 mA		
Output	LED dropout voltage	Typical	$V_F$	—	1.25 V (1.14 V at $I_F = 5 \text{ mA}$ )		$I_F = 50 \text{ mA}$
		Maximum			1.5 V		
	On resistance	Typical	$R_{on}$	A	22 Ω	36 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			35 Ω	50 Ω	
		Typical	$R_{on}$	B	13 Ω	21 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			18 Ω	25 Ω	
Transfer characteristics	Typical	Typical	$R_{on}$	C	6.5 Ω	10.5 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum			9 Ω	12.5 Ω	
	Output capacitance	Typical	$C_{out}$	—	5.6 pF	4.8 pF	$I_F = 0 \text{ mA}$ $V_B = 0 \text{ V}$ $f = 1 \text{ MHz}$
		Maximum			8 pF		
Transfer characteristics	Off state leakage current	Typical	$I_{Leak}$	—	0.03 nA		$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
		Maximum			10 nA		
	Turn on time*	Typical	$T_{on}$	—	0.1 ms		$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum			0.3 ms		
Transfer characteristics	Turn off time*	Typical	$T_{off}$	—	0.03 ms		$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum			0.1 ms		
	I/O capacitance	Typical	$C_{iso}$	—	0.8 pF		$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
		Maximum			1.5 pF		
Initial I/O isolation resistance			Minimum	$R_{iso}$	—	1,000 MΩ	500 V DC

\*Turn on/Turn off time

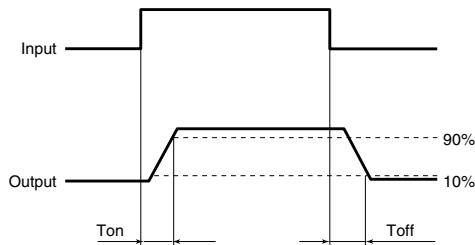

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	$I_F$	5	mA

### ■ For Dimensions.

### ■ For Schematic and Wiring Diagrams.

### ■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.


# RF 1 Form A (AQV22O)

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A

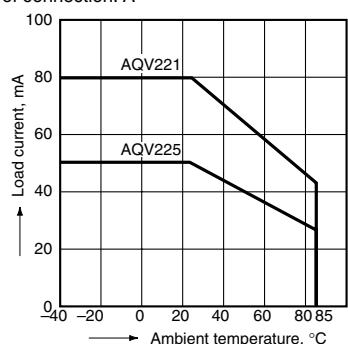


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 5 mA; Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

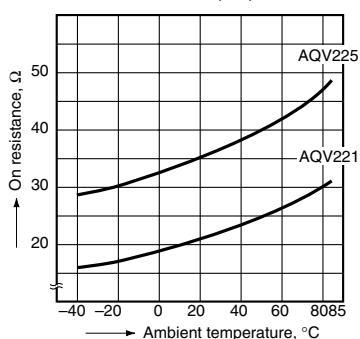


### 3. Turn on time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

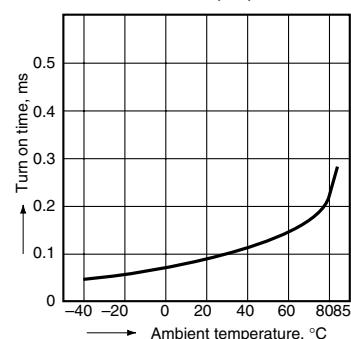


### 4. Turn off time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

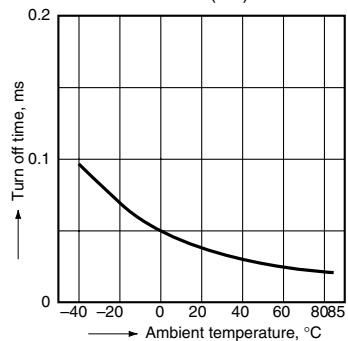


### 5. LED operate current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

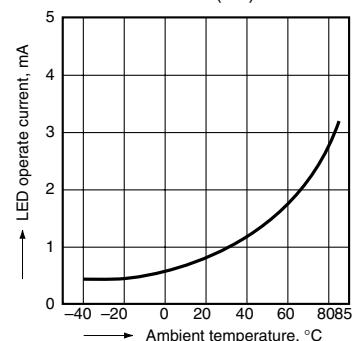


### 6. LED turn off current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

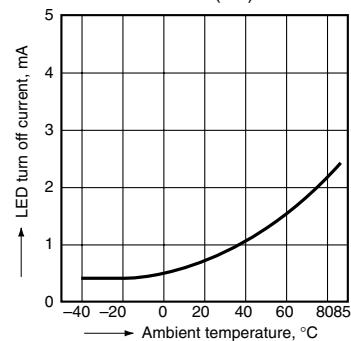


### 7. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 LED current: 5 to 50 mA

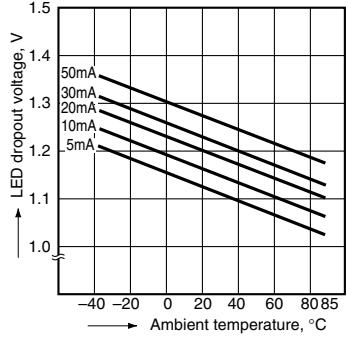


### 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

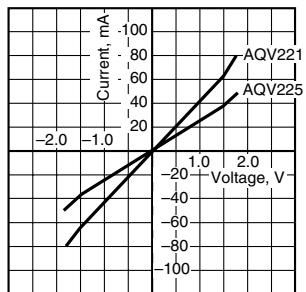

### 9. Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

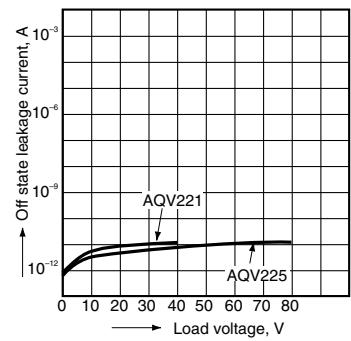

# RF 1 Form A (AQV22O)


## 10. Turn on time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

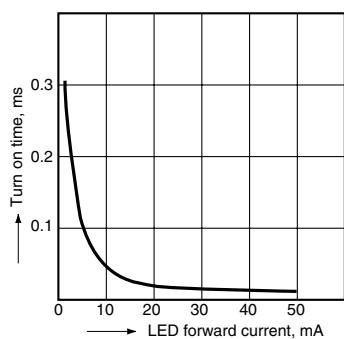


## 11. Turn off time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

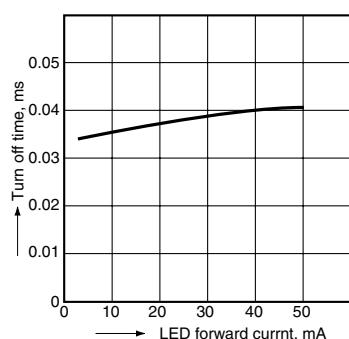


## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

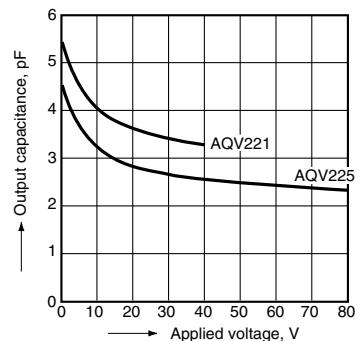

## 13. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

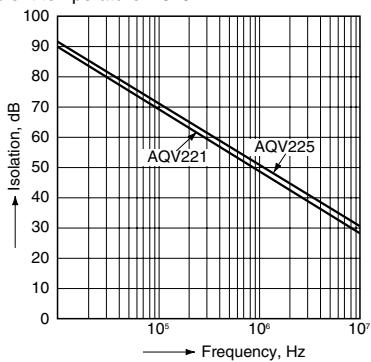

## 14. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

