

### Snap-in Type

Series: **HC** Type: **TS**

Discontinued

(Last purchasing order: 31/Mar/2015)  
(Last shipment : 30/Jun/2015)



#### ■ Features

- Endurance : 105 °C 2000 h
- 30 % smaller than series TS-HB
- RoHS directive compliant

#### ■ Specifications


Category Temp. Range	-40 °C to +105 °C		-25 °C to +105 °C
Rated W.V. Range	10 V.DC to 100 V.DC	160 V.DC to 250 V.DC	315 V.DC to 450 V.DC
Nominal Cap. Range	820 μF to 100000 μF	150 μF to 3300 μF	39 μF to 1000 μF
Capacitance Tolerance	±20 % (120 Hz/+20 °C)		
DC Leakage Current	3√CV (μA) max. After 5 minutes application of rated working voltage at +20 °C. C : Capacitance (μF) V: W.V. (V.DC)		
tan δ	Please see the attached standard products list		
Endurance	After 2000 hours application of DC voltage with specified ripple current (≤ rated DC working voltage) at +105 °C±2 °C, the capacitors shall meet the following limits.		
	Capacitance change	≤ ±20 % of initial measured value	
	tan δ	≤ 200 % of initial specified value	
	DC leakage current	≤ initial specified value	
Shelf Life	After storage for 1000 hours at +105 °C±2 °C within no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)		

#### ■ Frequency correction factor for ripple current

Rated Voltage	Frequency (Hz)						
	50	60	100	120	500	1 k	10 k to
10 V.DC to 100 V.DC /C.F.	0.93	0.95	0.99	1.00	1.05	1.08	1.15
160 V.DC to 450 V.DC /C.F.	0.75	0.80	0.95	1.00	1.20	1.25	1.40

#### ■ Dimensions in mm (not to scale)

(Unit : mm)

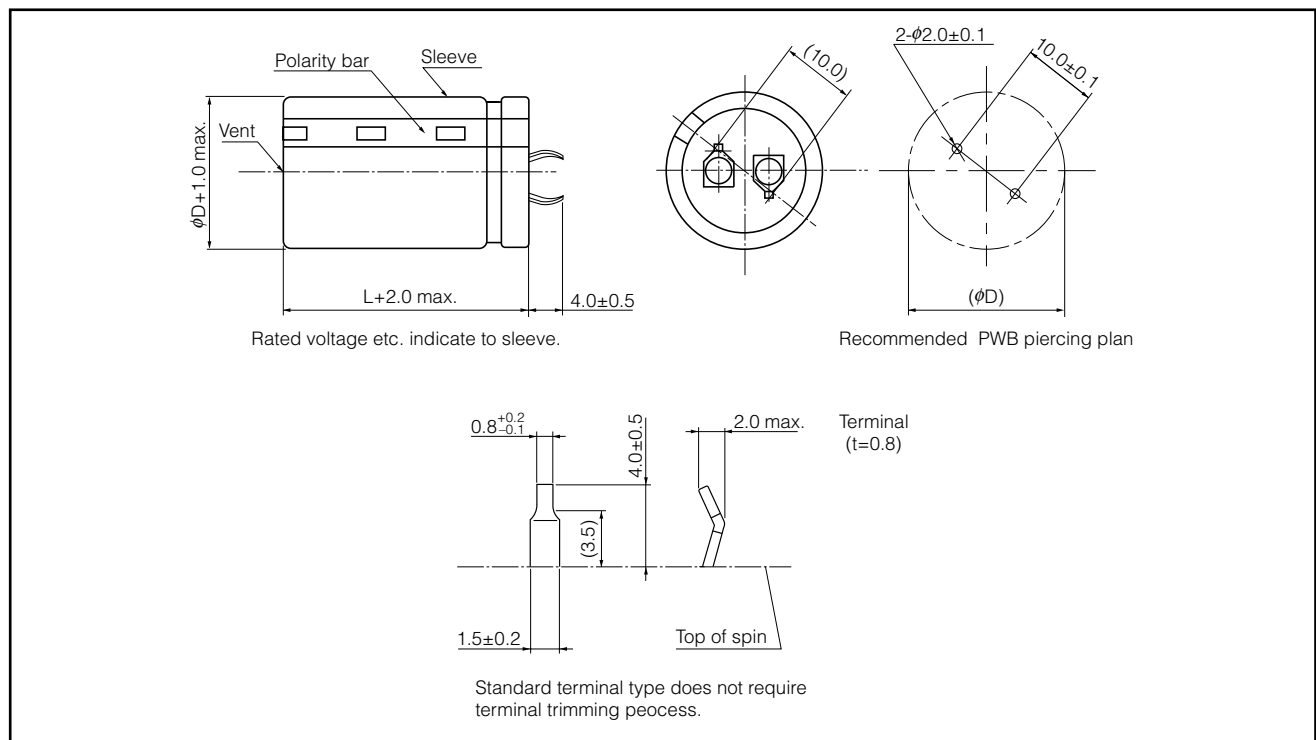

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
10	12000	22	25	EETHC1A123HJ	2.20	0.65	200
	15000	22	30	EETHC1A153HJ	2.30	0.65	200
	18000	22	30	EETHC1A183HJ	2.40	0.65	200
		25	25	EETHC1A183JJ	2.40	0.65	200
	22000	22	35	EETHC1A223HJ	2.60	0.65	200
		25	30	EETHC1A223JJ	2.60	0.65	200
	27000	22	40	EETHC1A273HJ	3.10	0.65	200
		25	35	EETHC1A273JJ	3.10	0.65	200
		30	25	EETHC1A273KJ	3.10	0.65	100
	33000	22	45	EETHC1A333HJ	3.40	0.65	200
		25	40	EETHC1A333JJ	3.40	0.65	200
	39000	25	45	EETHC1A393JJ	3.70	0.71	200
		30	30	EETHC1A393KJ	3.70	0.71	100
		35	25	EETHC1A393LJ	3.70	0.71	100
	47000	25	50	EETHC1A473JJ	4.20	0.79	200
		30	35	EETHC1A473KJ	4.20	0.79	100
		35	30	EETHC1A473LJ	4.20	0.79	100
	56000	30	40	EETHC1A563KJ	5.00	0.88	100
		35	35	EETHC1A563LJ	5.00	0.88	100
	68000	30	45	EETHC1A683KJ	5.40	1.00	100
35		40	EETHC1A683LJ	5.40	1.00	100	
*	82000	35	45	EETHC1A823LJ	5.90	1.14	100
*	100000	35	50	EETHC1A104LJ	6.50	1.32	100
16	10000	22	25	EETHC1C103HJ	2.60	0.55	200
	12000	22	30	EETHC1C123HJ	2.90	0.55	200
		25	25	EETHC1C123JJ	2.90	0.55	200
	15000	22	35	EETHC1C153HJ	3.20	0.55	200
	18000	22	40	EETHC1C183HJ	3.50	0.55	200
		25	30	EETHC1C183JJ	3.50	0.55	200
	22000	22	45	EETHC1C223HJ	3.80	0.55	200
		25	35	EETHC1C223JJ	3.80	0.55	200
		30	25	EETHC1C223KJ	3.80	0.55	100
	27000	22	50	EETHC1C273HJ	4.20	0.55	200
		25	40	EETHC1C273JJ	4.20	0.55	200
		30	30	EETHC1C273KJ	4.20	0.55	100
		35	25	EETHC1C273LJ	4.20	0.55	100
	33000	25	45	EETHC1C333JJ	4.70	0.55	200
		30	35	EETHC1C333KJ	4.70	0.55	100
	39000	30	40	EETHC1C393KJ	5.10	0.61	100
		35	30	EETHC1C393LJ	5.10	0.61	100
	47000	30	45	EETHC1C473KJ	5.50	0.69	100
		35	35	EETHC1C473LJ	5.50	0.69	100
	56000	30	50	EETHC1C563KJ	6.00	0.78	100
35		40	EETHC1C563LJ	6.00	0.78	100	
*	68000	35	45	EETHC1C683LJ	6.40	0.90	100

\*When capacitors of  $\phi 35 \times 45L$  and  $\phi 35 \times 50L$  are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
25	6800	22	25	EETHC1E682HJ	2.40	0.40	200
	8200	22	30	EETHC1E822HJ	2.70	0.40	200
		25	25	EETHC1E822JJ	2.70	0.40	200
	10000	22	35	EETHC1E103HJ	3.00	0.40	200
	12000	22	40	EETHC1E123HJ	3.20	0.40	200
		25	30	EETHC1E123JJ	3.20	0.40	200
	15000	22	45	EETHC1E153HJ	3.60	0.40	200
		25	35	EETHC1E153JJ	3.60	0.40	200
		30	25	EETHC1E153KJ	3.60	0.40	100
	18000	22	50	EETHC1E183HJ	3.90	0.40	200
		25	40	EETHC1E183JJ	3.90	0.40	200
		30	30	EETHC1E183KJ	3.90	0.40	100
		35	25	EETHC1E183LJ	3.90	0.40	100
	22000	25	45	EETHC1E223JJ	4.30	0.40	200
		30	35	EETHC1E223KJ	4.30	0.40	100
		35	30	EETHC1E223LJ	4.30	0.40	100
	27000	30	40	EETHC1E273KJ	4.80	0.40	100
		35	35	EETHC1E273LJ	4.80	0.40	100
	33000	30	45	EETHC1E333KJ	5.50	0.40	100
		35	40	EETHC1E333LJ	5.50	0.40	100
* 39000	30	50	EETHC1E393KJ	5.80	0.46	100	
	35	45	EETHC1E393LJ	5.80	0.46	100	
* 47000	35	50	EETHC1E473LJ	6.30	0.54	100	
35	4700	22	25	EETHC1V472HJ	2.20	0.35	200
	5600	22	30	EETHC1V562HJ	2.40	0.35	200
		25	25	EETHC1V562JJ	2.40	0.35	200
	6800	22	35	EETHC1V682HJ	2.60	0.35	200
	8200	22	40	EETHC1V822HJ	2.90	0.35	200
		25	30	EETHC1V822JJ	2.90	0.35	200
	10000	22	45	EETHC1V103HJ	3.20	0.35	200
		25	35	EETHC1V103JJ	3.20	0.35	200
		30	25	EETHC1V103KJ	3.20	0.35	100
	12000	22	50	EETHC1V123HJ	3.50	0.35	200
		25	40	EETHC1V123JJ	3.50	0.35	200
		30	30	EETHC1V123KJ	3.50	0.35	100
		35	25	EETHC1V123LJ	3.50	0.35	100
	15000	25	45	EETHC1V153JJ	3.90	0.35	200
		30	35	EETHC1V153KJ	3.90	0.35	100
		35	30	EETHC1V153LJ	3.90	0.35	100
	18000	30	40	EETHC1V183KJ	4.30	0.35	100
		35	35	EETHC1V183LJ	4.30	0.35	100
	22000	30	45	EETHC1V223KJ	5.00	0.35	100
		35	40	EETHC1V223LJ	5.00	0.35	100
* 27000	35	45	EETHC1V273LJ	5.30	0.35	100	
* 33000	35	50	EETHC1V333LJ	5.90	0.35	100	

\*When capacitors of  $\phi 35 \times 45L$  and  $\phi 35 \times 50L$  are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
50	2700	22	25	EETHC1H272HJ	1.80	0.35	200
	3300	22	30	EETHC1H332HJ	2.00	0.35	200
	3900	22	35	EETHC1H392HJ	2.20	0.35	200
		25	25	EETHC1H392JJ	2.20	0.35	200
	4700	22	40	EETHC1H472HJ	2.50	0.35	200
		25	30	EETHC1H472JJ	2.50	0.35	200
	5600	22	45	EETHC1H562HJ	2.80	0.35	200
		25	35	EETHC1H562JJ	2.80	0.35	200
		30	25	EETHC1H562KJ	2.80	0.35	100
	6800	22	50	EETHC1H682HJ	3.30	0.35	200
		25	40	EETHC1H682JJ	3.30	0.35	200
		30	30	EETHC1H682KJ	3.30	0.35	100
		35	25	EETHC1H682LJ	3.30	0.35	100
	8200	25	45	EETHC1H822JJ	3.60	0.35	200
		30	35	EETHC1H822KJ	3.60	0.35	100
	10000	25	50	EETHC1H103JJ	4.00	0.35	200
		30	40	EETHC1H103KJ	4.00	0.35	100
		35	30	EETHC1H103LJ	4.00	0.35	100
	12000	30	45	EETHC1H123KJ	4.50	0.35	100
		35	35	EETHC1H123LJ	4.50	0.35	100
15000	30	50	EETHC1H153KJ	4.80	0.35	100	
	35	40	EETHC1H153LJ	4.80	0.35	100	
*	18000	35	45	EETHC1H183LJ	5.20	0.35	100
63	2200	22	25	EETHC1J222HJ	2.00	0.30	200
	2700	22	30	EETHC1J272HJ	2.20	0.30	200
		25	25	EETHC1J272JJ	2.20	0.30	200
	3300	22	35	EETHC1J332HJ	2.50	0.30	200
	3900	22	40	EETHC1J392HJ	2.70	0.30	200
		25	30	EETHC1J392JJ	2.70	0.30	200
		30	25	EETHC1J392KJ	2.70	0.30	100
	4700	22	45	EETHC1J472HJ	3.00	0.30	200
		25	35	EETHC1J472JJ	3.00	0.30	200
	5600	22	50	EETHC1J562HJ	3.30	0.30	200
		25	40	EETHC1J562JJ	3.30	0.30	200
		30	30	EETHC1J562KJ	3.30	0.30	100
		35	25	EETHC1J562LJ	3.30	0.30	100
	6800	25	45	EETHC1J682JJ	3.60	0.30	200
		30	35	EETHC1J682KJ	3.60	0.30	100
		35	30	EETHC1J682LJ	3.60	0.30	100
	8200	30	40	EETHC1J822KJ	3.90	0.30	100
		35	35	EETHC1J822LJ	3.90	0.30	100
	10000	30	45	EETHC1J103KJ	4.40	0.30	100
		35	40	EETHC1J103LJ	4.40	0.30	100
*	12000	35	45	EETHC1J123LJ	4.80	0.30	100
*	15000	35	50	EETHC1J153LJ	5.40	0.30	100

\*When capacitors of  $\phi 35 \times 45L$  and  $\phi 35 \times 50L$  are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

**Discontinued**

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
80	1200	22	25	EETHC1K122HJ	1.50	0.25	200
	1500	22	30	EETHC1K152HJ	1.70	0.25	200
		25	25	EETHC1K152JJ	1.70	0.25	200
	1800	22	35	EETHC1K182HJ	1.80	0.25	200
	2200	22	40	EETHC1K222HJ	2.10	0.25	200
		25	30	EETHC1K222JJ	2.10	0.25	200
	2700	22	45	EETHC1K272HJ	2.40	0.25	200
		25	35	EETHC1K272JJ	2.40	0.25	200
		30	25	EETHC1K272KJ	2.40	0.25	100
	3300	22	50	EETHC1K332HJ	2.60	0.25	200
		25	40	EETHC1K332JJ	2.60	0.25	200
		30	30	EETHC1K332KJ	2.60	0.25	100
		35	25	EETHC1K332LJ	2.60	0.25	100
	3900	25	45	EETHC1K392JJ	3.00	0.25	200
		30	35	EETHC1K392KJ	3.00	0.25	100
	4700	25	50	EETHC1K472JJ	3.30	0.25	200
		30	40	EETHC1K472KJ	3.30	0.25	100
		35	30	EETHC1K472LJ	3.30	0.25	100
	5600	30	45	EETHC1K562KJ	3.70	0.25	100
		35	35	EETHC1K562LJ	3.70	0.25	100
6800	30	50	EETHC1K682KJ	3.90	0.25	100	
	35	40	EETHC1K682LJ	3.90	0.25	100	
*	8200	35	45	EETHC1K822LJ	4.30	0.25	100
100	820	22	25	EETHC2A821HJ	1.40	0.25	200
	1000	22	30	EETHC2A102HJ	1.70	0.25	200
	1200	22	30	EETHC2A122HJ	1.80	0.25	200
		25	25	EETHC2A122JJ	1.80	0.25	200
	1500	22	35	EETHC2A152HJ	2.10	0.25	200
		25	30	EETHC2A152JJ	2.10	0.25	200
	1800	22	40	EETHC2A182HJ	2.30	0.25	200
		25	35	EETHC2A182JJ	2.30	0.25	200
		30	25	EETHC2A182KJ	2.30	0.25	100
	2200	25	40	EETHC2A222JJ	2.60	0.25	200
		30	30	EETHC2A222KJ	2.60	0.25	100
		35	25	EETHC2A222LJ	2.60	0.25	100
	2700	25	45	EETHC2A272JJ	2.90	0.25	200
		30	35	EETHC2A272KJ	2.90	0.25	100
	3300	25	50	EETHC2A332JJ	3.20	0.25	200
		30	40	EETHC2A332KJ	3.20	0.25	100
		35	30	EETHC2A332LJ	3.20	0.25	100
	3900	30	45	EETHC2A392KJ	3.60	0.25	100
		35	35	EETHC2A392LJ	3.60	0.25	100
	4700	30	50	EETHC2A472KJ	3.80	0.25	100
35		40	EETHC2A472LJ	3.80	0.25	100	
*	5600	35	45	EETHC2A562LJ	4.10	0.25	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

**Discontinued**

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
160	470	22	25	EETHC2C471HJ	1.40	0.15	200
	560	22	30	EETHC2C561HJ	1.50	0.15	200
	680	22	30	EETHC2C681HJ	1.70	0.15	200
		25	25	EETHC2C681JJ	1.70	0.15	200
	820	22	35	EETHC2C821HJ	2.00	0.15	200
		25	30	EETHC2C821JJ	2.00	0.15	200
	1000	22	40	EETHC2C102HJ	2.20	0.15	200
		25	35	EETHC2C102JJ	2.20	0.15	200
		30	25	EETHC2C102KJ	2.20	0.15	100
	1200	22	45	EETHC2C122HJ	2.30	0.15	200
		25	40	EETHC2C122JJ	2.30	0.15	200
		30	30	EETHC2C122KJ	2.30	0.15	100
		35	25	EETHC2C122LJ	2.30	0.15	100
	1500	25	45	EETHC2C152JJ	2.50	0.15	200
		30	35	EETHC2C152KJ	2.50	0.15	100
		35	30	EETHC2C152LJ	2.50	0.15	100
	1800	25	50	EETHC2C182JJ	2.70	0.15	200
		30	40	EETHC2C182KJ	2.70	0.15	100
		35	30	EETHC2C182LJ	2.70	0.15	100
	2200	30	45	EETHC2C222KJ	2.90	0.15	100
35		35	EETHC2C222LJ	2.90	0.15	100	
2700	30	50	EETHC2C272KJ	3.10	0.15	100	
	35	40	EETHC2C272LJ	3.10	0.15	100	
*	3300	35	50	EETHC2C332LJ	3.30	0.15	100
180	470	22	25	EETHC2P471HC	1.45	0.15	200
	560	22	30	EETHC2P561HJ	1.50	0.15	200
		25	25	EETHC2P561JJ	1.50	0.15	200
	680	22	35	EETHC2P681HJ	1.70	0.15	200
		25	30	EETHC2P681JJ	1.70	0.15	200
	820	22	40	EETHC2P821HJ	2.00	0.15	200
		25	30	EETHC2P821JJ	2.00	0.15	200
		30	25	EETHC2P821KJ	2.00	0.15	100
	1000	22	45	EETHC2P102HJ	2.20	0.15	200
		25	40	EETHC2P102JJ	2.20	0.15	200
		30	30	EETHC2P102KJ	2.20	0.15	100
		35	25	EETHC2P102LJ	2.20	0.15	100
	1200	25	45	EETHC2P122JJ	2.30	0.15	200
		30	30	EETHC2P122KC	2.30	0.15	100
		30	35	EETHC2P122KJ	2.30	0.15	100
	1500	25	50	EETHC2P152JJ	2.50	0.15	200
		30	40	EETHC2P152KJ	2.50	0.15	100
		35	30	EETHC2P152LJ	2.50	0.15	100
	1800	30	45	EETHC2P182KJ	2.70	0.15	100
		35	35	EETHC2P182LJ	2.70	0.15	100
2200	30	50	EETHC2P222KJ	2.90	0.15	100	
	35	40	EETHC2P222LJ	2.90	0.15	100	
*	2700	35	50	EETHC2P272LJ	3.10	0.15	100

\*When capacitors of  $\phi 35 \times 45L$  and  $\phi 35 \times 50L$  are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

**Discontinued**

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
200	390	22	25	EETHC2D391HJ	1.31	0.15	200
	470	22	30	EETHC2D471HJ	1.45	0.15	200
		25	25	EETHC2D471JC	1.45	0.15	200
	680	22	40	EETHC2D681HJ	1.75	0.15	200
		25	30	EETHC2D681JJ	1.75	0.15	200
	820	22	45	EETHC2D821HJ	2.04	0.15	200
		25	35	EETHC2D821JJ	2.04	0.15	200
	1000	22	50	EETHC2D102HJ	2.30	0.15	200
		25	40	EETHC2D102JC	2.30	0.15	200
		25	45	EETHC2D102JJ	2.30	0.15	200
		30	30	EETHC2D102KJ	2.30	0.15	100
	1200	25	45	EETHC2D122JC	2.65	0.15	200
		25	50	EETHC2D122JJ	2.65	0.15	200
		30	35	EETHC2D122KJ	2.65	0.15	100
		35	30	EETHC2D122LJ	2.65	0.15	100
1500	30	40	EETHC2D152KJ	2.80	0.15	100	
1800	35	40	EETHC2D182LJ	3.08	0.15	100	
*	2200	35	45	EETHC2D222LJ	3.48	0.15	100
220	270	22	25	EETHC2Q271HJ	1.10	0.15	200
	330	22	25	EETHC2Q331HJ	1.26	0.15	200
	390	22	30	EETHC2Q391HJ	1.34	0.15	200
	470	22	35	EETHC2Q471HJ	1.48	0.15	200
		25	30	EETHC2Q471JJ	1.48	0.15	200
	560	22	35	EETHC2Q561HC	1.67	0.15	200
		22	40	EETHC2Q561HJ	1.67	0.15	200
		25	30	EETHC2Q561JJ	1.67	0.15	200
	680	22	45	EETHC2Q681HC	1.78	0.15	200
		25	35	EETHC2Q681JJ	1.78	0.15	200
		35	25	EETHC2Q681LJ	1.78	0.15	100
	820	22	50	EETHC2Q821HC	2.04	0.15	200
		25	40	EETHC2Q821JJ	2.04	0.15	200
		30	30	EETHC2Q821KJ	2.04	0.15	100
		35	25	EETHC2Q821LJ	2.04	0.15	100
	1000	25	45	EETHC2Q102JC	2.33	0.15	200
		25	50	EETHC2Q102JJ	2.33	0.15	200
		30	35	EETHC2Q102KJ	2.33	0.15	100
		35	30	EETHC2Q102LJ	2.33	0.15	100
	1200	30	40	EETHC2Q122KJ	2.65	0.15	100
		35	35	EETHC2Q122LJ	2.65	0.15	100
	1500	30	45	EETHC2Q152KC	2.80	0.15	100
30		50	EETHC2Q152KJ	2.80	0.15	100	
35		40	EETHC2Q152LJ	2.80	0.15	100	
*	1800	35	45	EETHC2Q182LJ	3.11	0.15	100
*	2200	35	50	EETHC2Q222LC	3.50	0.15	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives. (Avoid using adhesives including halogenated compositions.)



■ Standard Products

**Discontinued**

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
250	270	22	25	EETHC2E271HJ	1.10	0.15	200
	330	22	30	EETHC2E331HJ	1.20	0.15	200
		25	25	EETHC2E331JJ	1.20	0.15	200
	390	22	30	EETHC2E391HC	1.30	0.15	200
		22	35	EETHC2E391HJ	1.30	0.15	200
		25	25	EETHC2E391JJ	1.30	0.15	200
	470	22	35	EETHC2E471HC	1.40	0.15	200
		22	40	EETHC2E471HJ	1.40	0.15	200
		25	30	EETHC2E471JJ	1.40	0.15	200
		30	25	EETHC2E471KJ	1.40	0.15	100
	560	22	40	EETHC2E561HC	1.50	0.15	200
		22	45	EETHC2E561HJ	1.50	0.15	200
		25	35	EETHC2E561JJ	1.50	0.15	200
		30	25	EETHC2E561KJ	1.50	0.15	100
	680	22	45	EETHC2E681HC	1.70	0.15	200
		22	50	EETHC2E681HJ	1.70	0.15	200
		25	40	EETHC2E681JJ	1.70	0.15	200
		30	30	EETHC2E681KJ	1.70	0.15	100
		35	25	EETHC2E681LJ	1.70	0.15	100
	820	25	45	EETHC2E821JJ	2.00	0.15	200
30		35	EETHC2E821KJ	2.00	0.15	100	
35		30	EETHC2E821LJ	2.00	0.15	100	
1000	25	50	EETHC2E102JC	2.20	0.15	200	
	30	40	EETHC2E102KJ	2.20	0.15	100	
	35	30	EETHC2E102LJ	2.20	0.15	100	
1200	30	45	EETHC2E122KJ	2.30	0.15	100	
	35	35	EETHC2E122LJ	2.30	0.15	100	
*	1500	35	45	EETHC2E152LJ	2.50	0.15	100
*	1800	35	50	EETHC2E182LJ	2.70	0.15	100
315	150	22	25	EETHC2F151HJ	0.82	0.15	200
	180	22	30	EETHC2F181HJ	0.90	0.15	200
	220	22	30	EETHC2F221HJ	1.00	0.15	200
	270	22	40	EETHC2F271HC	1.10	0.15	200
		25	30	EETHC2F271JJ	1.10	0.15	200
	330	22	45	EETHC2F331HJ	1.20	0.15	200
		25	35	EETHC2F331JJ	1.20	0.15	200
		30	25	EETHC2F331KJ	1.20	0.15	100
	390	22	50	EETHC2F391HC	1.30	0.15	200
		25	40	EETHC2F391JJ	1.30	0.15	200
		30	30	EETHC2F391KJ	1.30	0.15	100
		35	25	EETHC2F391LJ	1.30	0.15	100
	470	25	45	EETHC2F471JJ	1.40	0.15	200
		30	35	EETHC2F471KJ	1.40	0.15	100
	560	25	50	EETHC2F561JJ	1.50	0.15	200
		30	40	EETHC2F561KJ	1.50	0.15	100
		35	30	EETHC2F561LJ	1.50	0.15	100
680	30	45	EETHC2F681KJ	1.70	0.15	100	
	35	35	EETHC2F681LJ	1.70	0.15	100	
820	30	50	EETHC2F821KJ	2.00	0.15	100	
	35	40	EETHC2F821LJ	2.00	0.15	100	
*	1000	35	45	EETHC2F102LJ	2.30	0.15	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)



■ Standard Products **Discontinued**

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
350	120	22	25	EETHC2V121HJ	0.75	0.15	200
	150	22	30	EETHC2V151HJ	0.82	0.15	200
	180	22	30	EETHC2V181HJ	0.90	0.15	200
		25	25	EETHC2V181JJ	0.90	0.15	200
	220	22	35	EETHC2V221HJ	1.00	0.15	200
		25	30	EETHC2V221JJ	1.00	0.15	200
	270	22	40	EETHC2V271HC	1.10	0.15	200
		25	35	EETHC2V271JJ	1.10	0.15	200
		30	25	EETHC2V271KJ	1.10	0.15	100
	330	22	45	EETHC2V331HC	1.20	0.15	200
		25	40	EETHC2V331JJ	1.20	0.15	200
		30	30	EETHC2V331KJ	1.20	0.15	100
	390	25	45	EETHC2V391JJ	1.30	0.15	200
		30	30	EETHC2V391KC	1.30	0.15	100
		30	35	EETHC2V391KJ	1.30	0.15	100
	470	25	50	EETHC2V471JJ	1.40	0.15	200
		30	35	EETHC2V471KC	1.40	0.15	100
		35	30	EETHC2V471LJ	1.40	0.15	100
	560	30	40	EETHC2V561KC	1.50	0.15	100
		30	45	EETHC2V561KJ	1.50	0.15	100
		35	35	EETHC2V561LJ	1.50	0.15	100
680	30	45	EETHC2V681KC	1.70	0.15	100	
	30	50	EETHC2V681KJ	1.70	0.15	100	
	35	40	EETHC2V681LJ	1.70	0.15	100	
*	820	35	45	EETHC2V821LJ	1.90	0.15	100
*	1000	35	50	EETHC2V102LC	1.90	0.15	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
400	100	22	25	EETHC2G101HJ	0.70	0.15	200
	120	22	30	EETHC2G121HJ	0.75	0.15	200
	150	22	30	EETHC2G151HJ	0.88	0.15	200
		25	25	EETHC2G151JC	0.88	0.15	200
	180	22	35	EETHC2G181HJ	0.95	0.15	200
		25	30	EETHC2G181JJ	0.95	0.15	200
	220	22	40	EETHC2G221HC	1.10	0.15	200
		22	45	EETHC2G221HJ	1.10	0.15	200
		25	35	EETHC2G221JJ	1.10	0.15	200
		30	25	EETHC2G221KJ	1.10	0.15	100
	270	22	45	EETHC2G271HC	1.22	0.15	200
		22	50	EETHC2G271HJ	1.22	0.15	200
		25	40	EETHC2G271JJ	1.22	0.15	200
		30	30	EETHC2G271KJ	1.22	0.15	100
		35	25	EETHC2G271LJ	1.22	0.15	100
	330	25	45	EETHC2G331JJ	1.44	0.15	200
		30	30	EETHC2G331KC	1.44	0.15	100
		30	35	EETHC2G331KJ	1.44	0.15	100
		35	30	EETHC2G331LJ	1.44	0.15	100
	390	25	50	EETHC2G391JJ	1.55	0.15	200
		30	35	EETHC2G391KC	1.55	0.15	100
		30	40	EETHC2G391KJ	1.55	0.15	100
		35	30	EETHC2G391LJ	1.55	0.15	100
	470	30	45	EETHC2G471KJ	1.68	0.15	100
		35	35	EETHC2G471LJ	1.68	0.15	100
	560	30	45	EETHC2G561KC	1.90	0.15	100
		30	50	EETHC2G561KJ	1.90	0.15	100
		35	40	EETHC2G561LJ	1.90	0.15	100
*	680	35	45	EETHC2G681LJ	2.12	0.15	100
*	820	35	50	EETHC2G821LJ	2.30	0.15	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
420	100	22	25	EETHC2S101HJ	0.70	0.15	200
	120	22	30	EETHC2S121HJ	0.74	0.15	200
		25	25	EETHC2S121JJ	0.74	0.15	200
	150	22	35	EETHC2S151HJ	0.84	0.15	200
		25	30	EETHC2S151JJ	0.84	0.15	200
	180	22	40	EETHC2S181HJ	0.91	0.15	200
		25	30	EETHC2S181JJ	0.91	0.15	200
		30	25	EETHC2S181KJ	0.91	0.15	100
	220	22	45	EETHC2S221HJ	1.05	0.15	200
		25	35	EETHC2S221JJ	1.05	0.15	200
		30	25	EETHC2S221KJ	1.05	0.15	100
	270	22	50	EETHC2S271HJ	1.20	0.15	200
		25	40	EETHC2S271JJ	1.20	0.15	200
		30	30	EETHC2S271KJ	1.20	0.15	100
		35	25	EETHC2S271LJ	1.20	0.15	100
	330	25	45	EETHC2S331JC	1.42	0.15	200
		25	50	EETHC2S331JJ	1.42	0.15	200
		30	35	EETHC2S331KJ	1.42	0.15	100
		35	35	EETHC2S331LJ	1.42	0.15	100
	390	30	40	EETHC2S391KJ	1.55	0.15	100
		35	30	EETHC2S391LC	1.55	0.15	100
		35	35	EETHC2S391LJ	1.55	0.15	100
	470	30	45	EETHC2S471KJ	1.71	0.15	100
		35	35	EETHC2S471LJ	1.71	0.15	100
560	30	50	EETHC2S561KJ	1.90	0.15	100	
	35	40	EETHC2S561LC	1.90	0.15	100	
	35	45	EETHC2S561LJ	1.90	0.15	100	
*	680	35	45	EETHC2S681LC	2.10	0.15	100
*		35	50	EETHC2S681LJ	2.10	0.15	100
*							

\*When capacitors of  $\phi 35 \times 45L$  and  $\phi 35 \times 50L$  are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)

■ Standard Products

Discontinued

Endurance : 105 °C 2000 h

W.V. (V. DC)	Cap. (120 Hz) (±20 %) (μF)	Case size		Part No.  PET sleeve Terminal Length 4.0 mm (Without Top Plate)	Specification		Min. Packaging Q'ty  (pcs)
		Dia. (mm)	Length (mm)		Ripple Current (120 Hz) (+105 °C) (A r.m.s.)	tan δ (120 Hz) (+20 °C) max.	
450	100	22	30	EETHC2W101HJ	0.64	0.20	200
		25	25	EETHC2W101JJ	0.64	0.20	200
	120	22	35	EETHC2W121HJ	0.72	0.20	200
		25	30	EETHC2W121JJ	0.72	0.20	200
	150	22	35	EETHC2W151HC	0.79	0.20	200
			40	EETHC2W151HJ	0.79	0.20	200
		25	30	EETHC2W151JJ	0.79	0.20	200
			30	25	EETHC2W151KJ	0.79	0.20
	180	22	45	EETHC2W181HJ	0.87	0.20	200
			35	EETHC2W181JC	0.87	0.20	200
		25	40	EETHC2W181JJ	0.87	0.20	200
			30	25	EETHC2W181KC	0.87	0.20
		30	30	EETHC2W181KJ	0.87	0.20	100
	220	22	50	EETHC2W221HJ	1.00	0.20	200
			40	EETHC2W221JC	1.00	0.20	200
		25	45	EETHC2W221JJ	1.00	0.20	200
			30	30	EETHC2W221KJ	1.00	0.20
		35	25	EETHC2W221LJ	1.00	0.20	100
	270	25	45	EETHC2W271JC	1.19	0.20	200
			50	EETHC2W271JJ	1.19	0.20	200
		30	35	EETHC2W271KC	1.19	0.20	100
			40	EETHC2W271KJ	1.19	0.20	100
		35	30	EETHC2W271LJ	1.19	0.20	100
	330	25	50	EETHC2W331JC	1.38	0.20	200
			40	EETHC2W331KC	1.38	0.20	100
		30	45	EETHC2W331KJ	1.38	0.20	100
			35	30	EETHC2W331LC	1.38	0.20
		35	35	EETHC2W331LJ	1.38	0.20	100
	390	30	45	EETHC2W391KC	1.55	0.20	100
			50	EETHC2W391KJ	1.55	0.20	100
35		35	EETHC2W391LC	1.55	0.20	100	
		40	EETHC2W391LJ	1.55	0.20	100	
470	30	50	EETHC2W471KC	1.74	0.20	100	
	35	40	EETHC2W471LC	1.74	0.20	100	
*	560	35	45	EETHC2W471LJ	1.74	0.20	100
*		35	50	EETHC2W561LJ	1.90	0.20	100

\*When capacitors of φ35×45L and φ35×50L are mounted on PWB, reinforce them with mounting clamp or adhesives.  
(Avoid using adhesives including halogenated compositions.)