



**1mm .039inch contact gap
1 Form A 10A/16A
power relays**

LK-G RELAYS



RoHS compliant

Protective construction: Flux-resistant type


FEATURES

- Contact gap: 1 mm .039 inch**
- Wide lineup of 3 types available**
 - 10A, 1 mm .039 inch contact gap type
 - 16A, 1 mm .039 inch contact gap type
 - 16 A standard type
- High inrush current capability (TV-5 approved)**
- Long insulation distance**
 - Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC60065)
 - Surge withstand voltage between contact and coil: 10,000 V

TYPICAL APPLICATIONS

- Audio visual equipment
- HA equipment
- Home appliances
- Office equipment

ORDERING INFORMATION

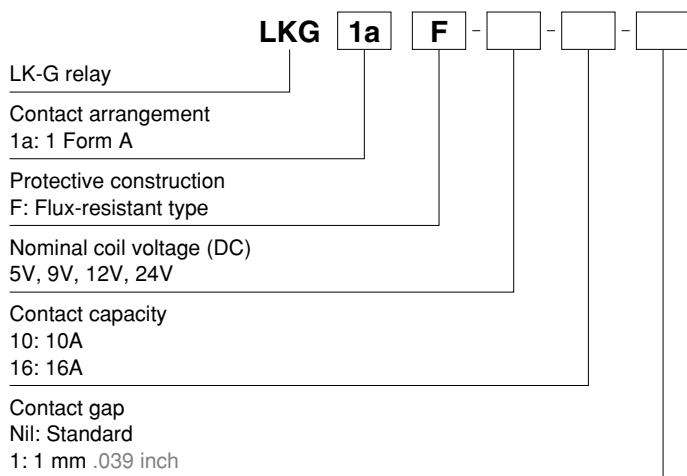

Note: Certified by UL/C-UL, TÜV

TYPES

| Contact arrangement | Nominal coil voltage | Part No. | | |
|---------------------|----------------------|----------------------------|----------------------------|--------------------|
| | | 10A, 1 mm contact gap type | 16A, 1 mm contact gap type | 16 A standard type |
| 1 Form A | 5V DC | LKG1aF-5V-10-1 | LKG1aF-5V-16-1 | LKG1aF-5V-16 |
| | 9V DC | LKG1aF-9V-10-1 | LKG1aF-9V-16-1 | LKG1aF-9V-16 |
| | 12V DC | LKG1aF-12V-10-1 | LKG1aF-12V-16-1 | LKG1aF-12V-16 |
| | 24V DC | LKG1aF-24V-10-1 | LKG1aF-24V-16-1 | LKG1aF-24V-16 |

Standard packing: Carton: 100 pcs.; Case: 500 pcs.

RATING

1. Coil data

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F) | Drop-out voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|---|---|---|---------------------------------------|-------------------------|-------------------------------------|
| 5V DC | 75%V or less of nominal voltage (Initial) | 10%V or more of nominal voltage (Initial) | 106.4mA | 47Ω | 530mW | 6.5V DC |
| 9V DC | | | 58.8mA | 153Ω | | 11.7V DC |
| 12V DC | | | 44.2mA | 272Ω | | 15.6V DC |
| 24V DC | | | 22.1mA | 1,087Ω | | 31.2V DC |

2. Specifications

| Characteristics | Item | Specifications | | |
|--|--|--|---|--------------------|
| | | 10A, 1 mm .039 inch contact gap type | 16A, 1 mm .039 inch contact gap type | 16 A standard type |
| Contact | Arrangement | 1 Form A | | |
| | Contact resistance (Initial) | Max. 100 mΩ (By voltage drop 6 V DC 1A) | | |
| | Contact material | AgSnO ₂ type | | |
| Rating | Nominal switching capacity (resistive load) | 10A 277V AC | 16A 277V AC | |
| | Max. switching power (resistive load) | 2,770VA | 4,432VA | |
| | Max. switching voltage | 277V AC | 277V AC | |
| | Max. switching current | 10A (AC) | 16A (AC) | |
| | Min. switching capacity (reference value)*1 | 100mA 5V DC | | |
| Electrical characteristics | Contact gap | Min. 1 mm .039 inch | | — |
| | Insulation resistance (Initial) | Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section. | | |
| | Breakdown voltage (Initial) | Between open contacts | 1,000 Vrms for 1 min. (Detection current: 10 mA) | |
| | | Between contact and coil | 4,000 Vrms for 1 min. (Detection current: 10 mA) | |
| | Surge breakdown voltage*2 (Between contact and coil) (Initial) | 10,000 V | | |
| | Operate time (at nominal voltage) (at 20°C 68°F) (Initial) | Max. 15 ms (excluding contact bounce time.) | | |
| Release time (at nominal voltage) (at 20°C 68°F) (Initial) | Max. 20 ms (excluding contact bounce time.) (with diode) | | | |
| Mechanical characteristics | Shock resistance | Functional | 200 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.) | |
| | | Destructive | 1,000 m/s ² (Half-wave pulse of sine wave: 6 ms.) | |
| | Vibration resistance | Functional | 10 to 55 Hz at double amplitude of 1.5 mm (Detection time: 10μs.) | |
| | | Destructive | 10 to 55 Hz at double amplitude of 1.5 mm | |
| Expected life | Mechanical | Min. 2×10 ⁶ (at 180 times/min.) | | |
| | Electrical | Min. 10 ⁵ (at 6 times/min.) (with diode) | Min. 5×10 ⁴ (at 6 times/min.) (with diode) | |
| Conditions | Conditions for operation, transport and storage*3 | Ambient temperature: -40°C to +70°C -40°F to +158°F; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature); Air pressure: 86 to 106 kPa | | |
| | Max. operating speed | 6 times/min. (at rated load) | | |
| Unit weight | | Approx. 12 g .42 oz | | |


Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981


*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

REFERENCE DATA

1. Max. switching power (AC resistive load)

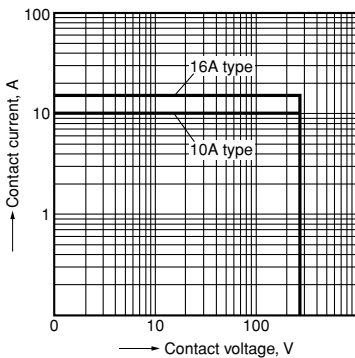


2. Ambient temperature characteristics and coil applied voltage

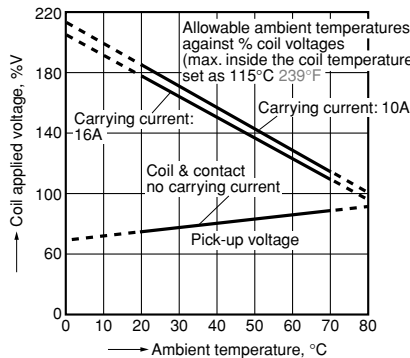


3-(1). Electrical life test (10A type)

Sample: LKG1aF-12V-10-1, 6 pcs.
Operation frequency: 6 times/min.
(ON/OFF = 1s: 9s)
Ambient temperature: 20°C 68°F


Circuit:

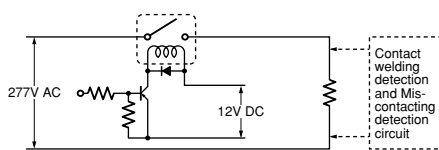

Change of pick-up and drop-out voltage

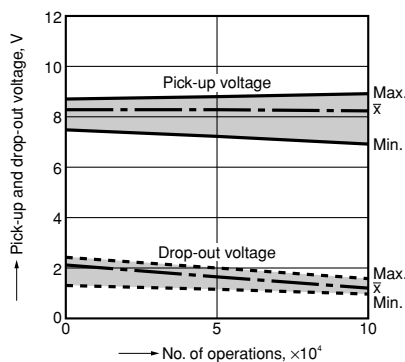


Change of contact resistance

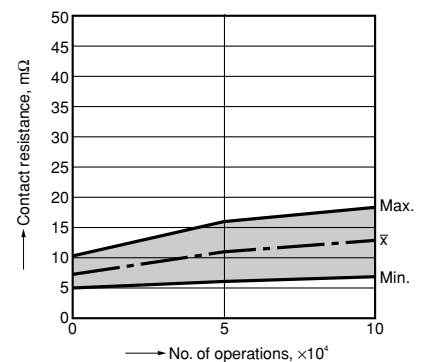


3-(2). Electrical life test (16A type)

Sample: LKG1aF-12V-16-1, 6 pcs.
 Operation frequency: 6 times/min.
 (ON/OFF = 1s: 9s)
 Ambient temperature: 20°C 68°F


Circuit:

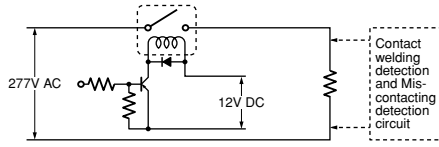

Change of pick-up and drop-out voltage

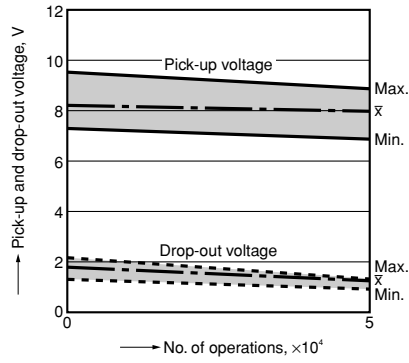

Change of contact resistance

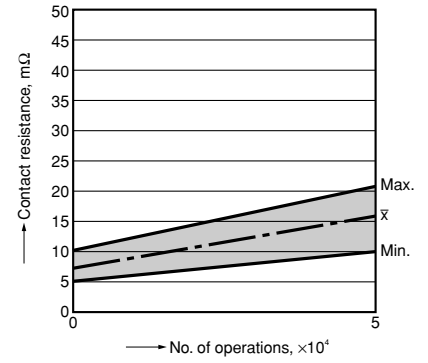


DIMENSIONS (mm inch)


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

CAD Data

External dimensions

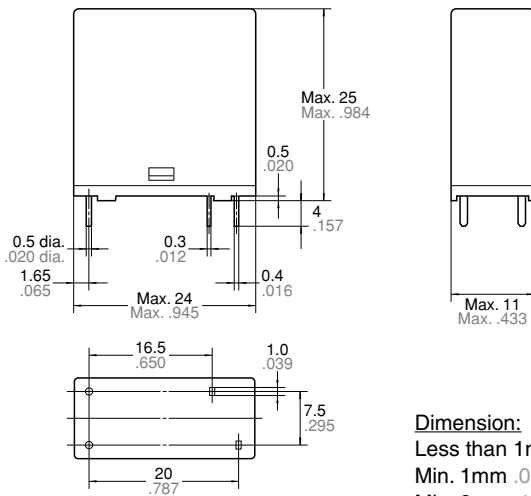

PC board pattern (Bottom view)

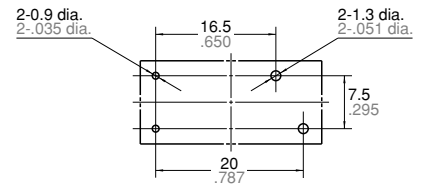

Tolerance: $\pm 0.1 \pm 0.004$

Schematic (Bottom view)



Dimension:

Less than 1mm .039inch:

Min. 1mm .039inch less than 3mm .118 inch: $\pm 0.2 \pm 0.008$

Min. 3mm .118 inch:

General tolerance

$\pm 0.1 \pm 0.004$

$\pm 0.2 \pm 0.008$

$\pm 0.3 \pm 0.012$

SAFETY STANDARDS

| Item | UL/C-UL (Recognized) | | | TÜV (Certified) | | | TV rating (UL/C-UL) | |
|----------|----------------------|-------------------------|-----------------|-------------------|------------------------|-------------------|---------------------|----------------|
| | File No. | Contact rating | Cycles | File No. | Contact rating | Cycles | File No. | Contact rating |
| 10A type | E43149 | 10A 277V AC General use | 10 ⁵ | B 12 09 13461 333 | 10A 250V AC (cosφ=1.0) | 10 ⁵ | E43149 | TV-5 |
| | | 10A 40V DC Resistive | 10 ⁵ | | 10A 30V DC (0ms) | 10 ⁵ | | — |
| | | 5A 30V DC Resistive | 10 ⁵ | | — | — | | — |
| 16A type | E43149 | 16A 125V AC General use | 10 ⁵ | B 12 09 13461 333 | 16A 250V AC (cosφ=1.0) | 10 ⁵ | E43149 | TV-5 |
| | | 10A 40V DC Resistive | 10 ⁵ | | 16A 30V DC (0ms) | 10 ⁵ * | | — |
| | | 5A 30V DC Resistive | 10 ⁵ | | — | — | | — |

* 1 mm Contact GAP type only (for standard GAP type, 16A 30V DC (0ms) 5×10⁴)

NOTES

1. For cautions for use, please read "GENERAL APPLICATION GUIDELINES".

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic[®]

©Panasonic Corporation 2016