



**Compact size,
1 Form A 35A/48A/90A
power relays
for solar inverter**

**HE RELAYS
PV Type**

FEATURES

1. High capacity and compact size

High capacity control possible (35A/48A/90A type)

35A/48A type: L: 33 × W: 38 × H: 36.3mm L: 1.299 × W: 1.496 × H: 1.429inch

90A type: L: 33 × W: 38 × H: 38.8mm L: 1.299 × W: 1.496 × H: 1.528inch



Due to improved conduction efficiency, wide terminal blades are used (for 48A and 90A type)

3. Contributes to energy saving in devices thanks to reduced coil hold voltage

Coil hold voltage can be reduced down 40% of the nominal coil voltage (ambient temperature 20°C 68°F) This is equal to operating power of approximately 310mW.

*Coil hold voltage is the coil voltage after 100ms following application of the nominal coil voltage.

4. High insulation and 10,000V surge breakdown voltage (between contacts and coil)

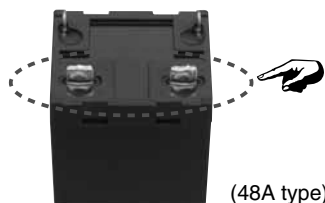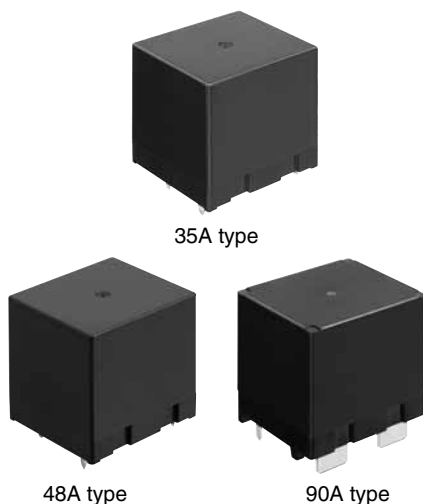

RoHS compliant

Protective construction: Flux-resistant type

2. Contact GAP

Compliant with European photovoltaic standard VDE0126

Compliant with EN61810-1 2.5kW surge breakdown voltage (between contacts)

35A/48A type: 2.5mm .098inch

90A type: 3.0mm .118inch

TYPICAL APPLICATIONS

- Inverter (Solar and industrial)
- UPS
- Stationary charging stand

ORDERING INFORMATION

HE 1a N - [] - DC [] - []

Contact arrangement

1a: 1 Form A (Single side stable type)

Pick-up voltage

N: 70% of nominal voltage

Terminals

P: PC board terminal type / Blade terminal type

W: Wide blade terminal type

Coil voltage (DC)

6, 9, 12, 24V

Type, contact material and switching capacity

Y5: PV type, AgNi type (1 Form A 48A)

Y6: PV type, AgNi type (1 Form A 90A)

H18: PV type, AgSnO₂ type (1 Form A 35A)

TYPES

| Type | Nominal coil voltage | Contact arrangement | Part No. |
|------|----------------------|---------------------|-------------------|
| 35A* | 6V DC | 1 Form A | HE1aN-P-DC6V-H18 |
| | 9V DC | | HE1aN-P-DC9V-H18 |
| | 12V DC | | HE1aN-P-DC12V-H18 |
| | 24V DC | | HE1aN-P-DC24V-H18 |
| 48A | 6V DC | | HE1aN-P-DC6V-Y5 |
| | 9V DC | | HE1aN-P-DC9V-Y5 |
| | 12V DC | | HE1aN-P-DC12V-Y5 |
| | 24V DC | | HE1aN-P-DC24V-Y5 |
| 90A | 6V DC | | HE1aN-W-DC6V-Y6 |
| | 9V DC | | HE1aN-W-DC9V-Y6 |
| | 12V DC | | HE1aN-W-DC12V-Y6 |
| | 24V DC | | HE1aN-W-DC24V-Y6 |

Standard packing: Carton: 25 pcs.; Case: 100 pcs.

*35A 6V, 12V and 24V DC type: Certified by UL/C-UL (35A 9V type: Certified by UL/C-UL and VDE)

RATING

1. Coil data

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F) (Initial) | Drop-out voltage (at 20°C 68°F) (Initial) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|---|---|---------------------------------------|-------------------------|-------------------------------------|
| 6V DC | 70%V or less of nominal voltage | 10%V or more of nominal voltage | 320mA | 18.8Ω | 1,920mW | 110%V of nominal voltage |
| 9V DC | | | 213mA | 42.2Ω | | |
| 12V DC | | | 160mA | 75.0Ω | | |
| 24V DC | | | 80mA | 300.0Ω | | |

2. Specifications

| Characteristics | Item | | Specifications | | |
|----------------------------|--|--|---|--|---|
| | | | 35A type | 48A type | 90A type |
| Contact | Arrangement | | 1 Form A | | |
| | Contact resistance (Initial) | | Max. 100 mΩ (By voltage drop 6V DC 1A) | | Max. 10 mΩ (By voltage drop 5V DC 20A) |
| | Contact material | | AgSnO ₂ type | AgNi type | |
| Rating | Nominal switching capacity | | 35A 277V AC (Resistive load) | 48 A 277V AC (Resistive load) | 80A 277V AC (Resistive load) |
| | Contact carrying power | | 9,695VA (Resistive load) | 13,296VA (Resistive load) | 24,930VA (Resistive load) |
| | Max. switching voltage | | 277V AC | | |
| | Max. switching current | | 35A (AC) | 48A (AC) | 90A (AC) |
| | Nominal operating power | | 1,920mW | | |
| | Min. switching capacity (Reference value)*1 | | 100mA 5V DC | | |
| Electrical characteristics | Insulation resistance (Initial) | | Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section. | | |
| | Breakdown voltage (Initial) | Between open contacts | 2,000 Vrms for 1 min. (Detection current: 10mA) | | |
| | | Between contact and coil | 5,000 Vrms for 1 min. (Detection current: 10mA) | | |
| | Surge breakdown voltage*2 (Between contact and coil) | | 10,000 V (Initial) | | |
| | Temperature rise | Max. 60°C 140°F (By resistive method, contact carrying current: 35A, 100%V of nominal coil voltage at 55°C 131°F.) | | Max. 60°C 140°F (By resistive method, contact carrying current: 48A, 100%V of nominal coil voltage at 55°C 131°F.) | Max. 60°C 140°F (By resistive method, contact carrying current: 90A, 100%V of nominal coil voltage at 55°C 131°F.) |
| | | Max. 30°C 86°F (By resistive method, contact carrying current: 35A, 60%V of nominal coil voltage at 85°C 185°F.) | | Max. 30°C 86°F (By resistive method, contact carrying current: 48A, 60%V of nominal coil voltage at 85°C 185°F.) | Max. 30°C 86°F (By resistive method, contact carrying current: 90A, 60%V of nominal coil voltage at 85°C 185°F.) |
| | Coil hold voltage*3 | | 40 to 100%V (Contact carrying current: 35A, at 20°C 68°F), 50 to 100%V (Contact carrying current: 35A, at 55°C 131°F), 50 to 60%V (Contact carrying current: 35A, at 85°C 185°F) | 40 to 100%V (Contact carrying current: 48A, at 20°C 68°F), 50 to 100%V (Contact carrying current: 48A, at 55°C 131°F), 50 to 60%V (Contact carrying current: 48A, at 85°C 185°F) | 40 to 100%V (Contact carrying current: 90A, at 20°C 68°F), 50 to 60%V (Contact carrying current: 90A, at 85°C 185°F) |
| | Operate time (at 20°C 68°F) | | Max. 30 ms (nominal coil voltage, excluding contact bounce time) | | |
| | Release time (at 20°C 68°F)*5 | | Max. 10 ms (nominal coil voltage, excluding contact bounce time) (without diode) | | |
| | Mechanical characteristics | Shock resistance | Functional | 98 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10 μs.) | |
| Destructive | | | 980 m/s ² (Half-wave pulse of sine wave: 6 ms.) | | |
| Vibration resistance | | Functional | 10 to 55 Hz at double amplitude of 1.0 mm (Detection time: 10 μs.) | | |
| | | Destructive | 10 to 55 Hz at double amplitude of 1.5 mm | | |
| Expected life | Mechanical | | Min. 10 ⁷ (at 180 times/min.) | | Min. 1×10 ⁶ (at 180 times/min.) |
| | Electrical | Resistive load | Min. 3×10 ⁴ (35A 277V AC) (ON : OFF = 1s : 9s, at 85°C 185°F) | Min. 3×10 ⁴ (48A 277V AC) (ON : OFF = 1s : 9s, at 85°C 185°F) | Min. 1×10 ⁴ (80A 277V AC) (ON : OFF = 1s : 9s, at 20°C 68°F) Min. 1×10 ³ (90A 250V AC) (ON : OFF = 1s : 9s, at 85°C 185°F) |
| Conditions | Conditions for operation, transport and storage*4 | | Ambient temperature: -50 to +55°C -58 to +131°F (When nominal coil voltage applied) -50 to +85°C -58 to +185°F (When applied coil hold voltage is 50% to 60% of nominal coil voltage) Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature); Air pressure: 86 to 106 kPa | | |
| | Max. operating speed | | 6 times/min. (at nominal switching capacity ON : OFF = 1s : 9s) | | |
| Unit weight | | Approx. 80 g 2.82 oz | | Approx. 85 g 3.00 oz | |

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981

*3. Coil hold voltage is the coil voltage after 100 ms following application of the nominal coil voltage.


*4. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

*5. Release time will lengthen if a diode, etc., is connected in parallel to the coil. Be sure to verify operation under actual conditions.

REFERENCE DATA


1.-(1) Coil temperature rise (35A type)

Sample: HE1aN-P-DC9V-H18, 6 pcs.
 Point measured: coil inside
 Ambient temperature: 25°C 77°F, 60°C 140°F, 85°C 185°F
 Contact carrying current: 35A

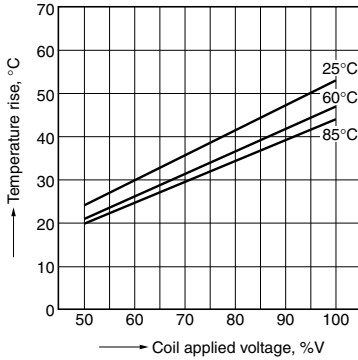


1.-(2) Coil temperature rise (48A type)

Sample: HE1aN-P-DC9V-Y5, 6 pcs.
 Point measured: coil inside
 Ambient temperature: 25°C 77°F, 60°C 140°F, 85°C 185°F
 Contact carrying current: 48A

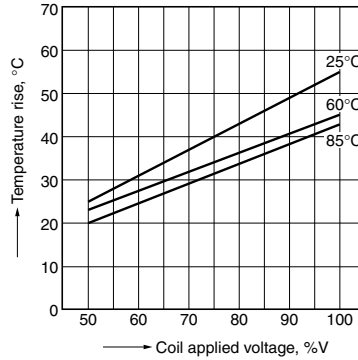

1.-(3) Coil temperature rise (90A type)


Sample: HE1aN-W-DC12V-Y6, 6 pcs.
 Point measured: coil inside
 Ambient temperature: 25°C 77°F, 60°C 140°F, 85°C 185°F
 Contact carrying current: 90A

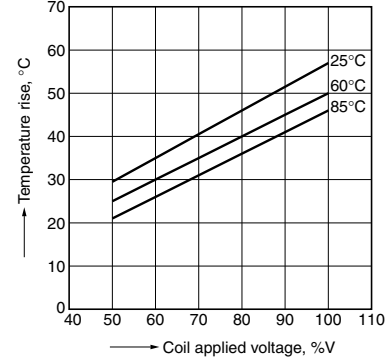


2.-(1) Electrical life test (35A type) (Resistive load 277V AC, 35A at 85°C 185°F)

Sample: HE1aN-P-DC9V-H18, 6 pcs.
 Operation frequency: 6 times/min.
 (ON/OFF = 1.0s : 9.0s)


Circuit:

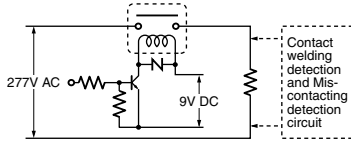

Change of pick-up and drop-out voltage

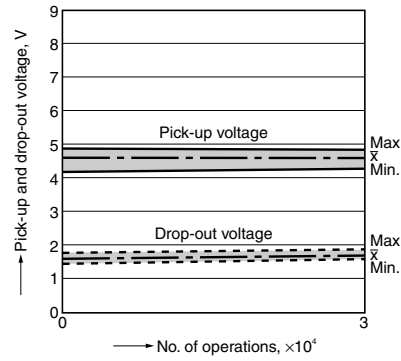


Change of contact resistance

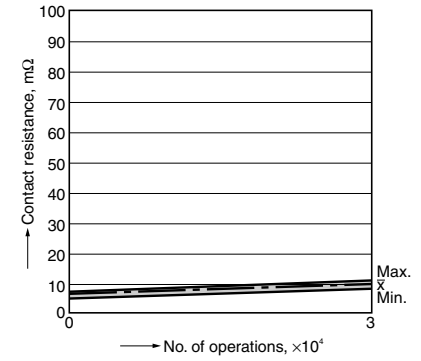


2.-(2) Electrical life test (48A type) (Resistive load 277V AC, 48A at 85°C 185°F)

Sample: HE1aN-P-DC9V-Y5, 6 pcs.
 Operation frequency: 6 times/min.
 (ON/OFF = 1.0s : 9.0s)


Circuit:

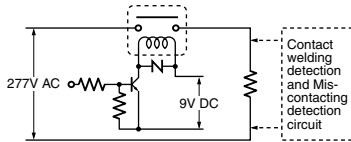

Change of pick-up and drop-out voltage

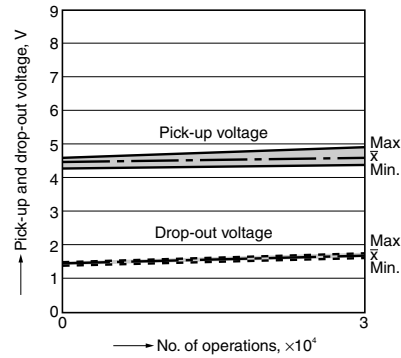


Change of contact resistance

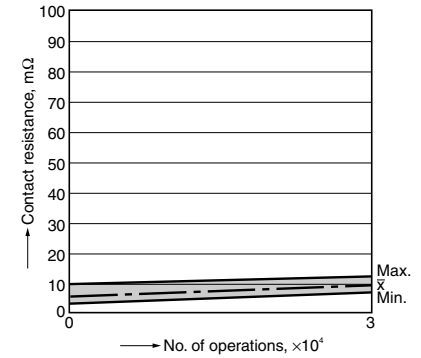


2.-(3) Electrical life test (90A type) (Resistive load 277V AC, 80A at 25°C 77°F)

Sample: HE1aN-W-DC12V-Y6, 6 pcs.
 Operation frequency: 6 times/min.
 (ON/OFF = 1.0s : 9.0s)


Circuit:

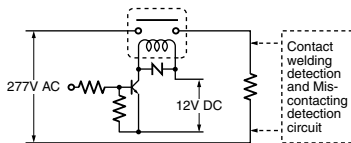

Change of pick-up and drop-out voltage

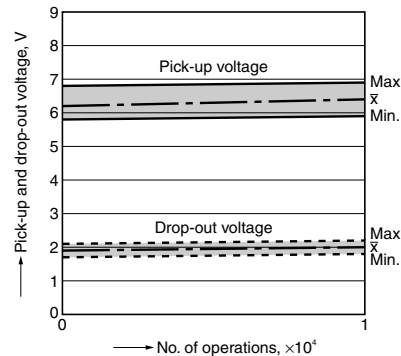

Change of contact resistance

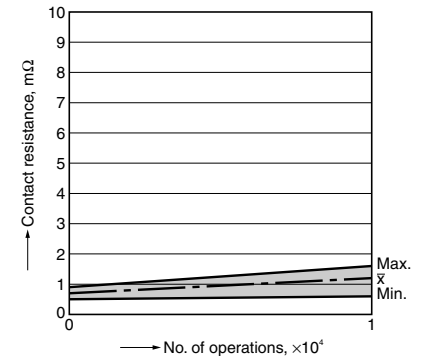

DIMENSIONS (mm inch)


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

1. 35A type

CAD Data




External dimensions

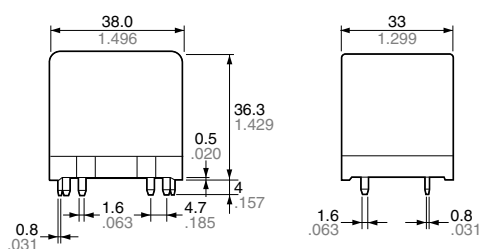


General tolerance: $\pm 0.3 \pm 0.012$

Schematic (Bottom view)
Single side stable type



PC board pattern (Bottom view)

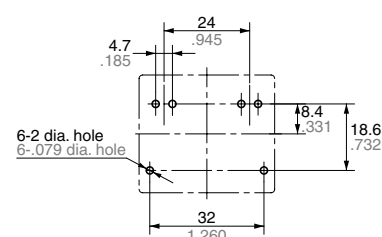


Tolerance: $\pm 0.1 \pm 0.004$

2. 48A type

CAD Data




External dimensions

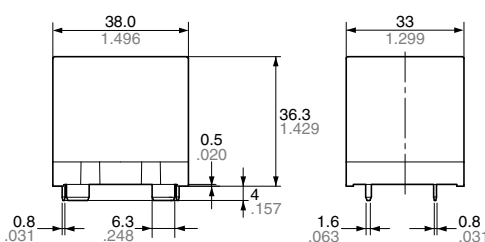


General tolerance: $\pm 0.3 \pm 0.012$

Schematic (Bottom view)
Single side stable type



PC board pattern (Bottom view)

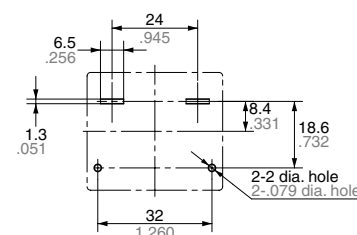


Tolerance: $\pm 0.1 \pm 0.004$

3. 90A type

CAD Data




External dimensions

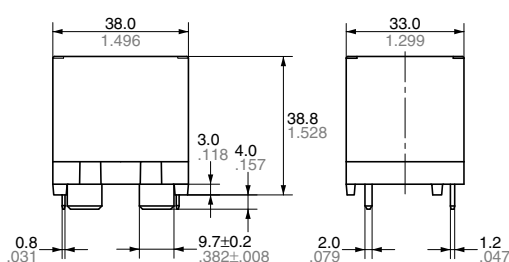


General tolerance: $\pm 0.3 \pm 0.012$

Schematic (Bottom view)
Single side stable type



PC board pattern (Bottom view)

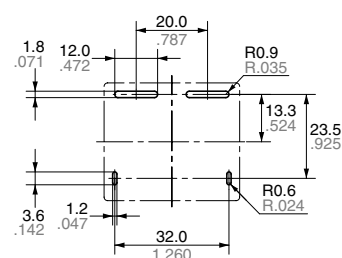

Tolerance: $\pm 0.1 \pm 0.004$

SAFETY STANDARDS

| Type | Certification authority | File No. | Contact rating |
|------|-------------------------|----------|---|
| 90A | UL/C-UL* | E43028 | 80A 300V AC (general use 10k cycles) 80A 300V AC (general use at 85°C 185°F, 6k cycles) in use at 60% of rated coil voltage |
| | VDE (VDE0435) | 40006681 | 80A 250V AC $\cos\phi = 1$ (at 25°C 77°F, 10k cycles) |
| | | | 90A 250V AC $\cos\phi = 0.8$ (at 85°C 185°F, 1k cycles) |
| | | | 80A 250V AC $\cos\phi = 0.8$ (at 85°C 185°F, 10k cycles) 90A 300V AC $\cos\phi = 1$ (at 85°C 185°F, 1k cycles) |
| 48A | UL/C-UL | E43028 | 48A 277V AC (general use, at 85°C 185°F, 30k cycles) in use at 60% of rated coil voltage 60A 277V AC (general use, at 60°C 140°F, 10k cycles), in use at 60% of rated coil voltage |
| | VDE (VDE0435) | 40006681 | 48A 250V AC $\cos\phi = 0.8$ (at 85°C 185°F, 30k cycles) |
| | | | 72A 250V AC ($\cos\phi = 0.8$ at 85°C 185°F, 50 cycles) |
| | | | 60A 250V AC ($\cos\phi = 0.8$ at 85°C 185°F, 10k cycles) 50A 20V DC (0ms, at 85°C 185°F, 30k cycles) |
| 35A | UL/CSA | E43028 | 35A 277V AC (10k cycles), 30A 277V AC (100k cycles), 30A 30V DC (100k cycles), 1.5HP 125V AC (100k cycles), 3HP 250V AC (100k cycles), TV-15 |
| | VDE (VDE0435)** | 40006681 | 35A 250V AC $\cos\phi = 1$ (at 80°C 176°F, 50k cycles) |

* CSA standard: Certified by C-UL

** Only 9V DC type is Certified by VDE

NOTES

1. For cautions for use, please read "GENERAL APPLICATION GUIDELINES".

2. Usage, transport and storage conditions

1) Temperature:

-50 to +55°C -58 to +131°F

-50 to +85°C -58 to +185°F (When applied coil hold voltage is 50% to 60% of nominal coil voltage)



2) Humidity: 5 to 85% RH

(Avoid freezing and condensation.)

The humidity range varies with the temperature. Use within the range indicated in the graph below.

3) Atmospheric pressure: 86 to 106 kPa

Temperature and humidity range for usage, transport, and storage

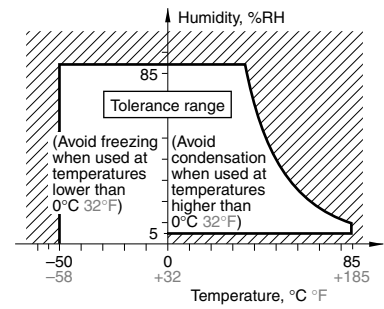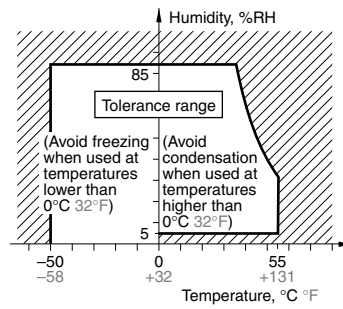

* -50 to +85°C -58 to +185°F (When applied coil hold voltage is 50% to 60% of nominal coil voltage)

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2016

Specifications are subject to change without notice.