


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

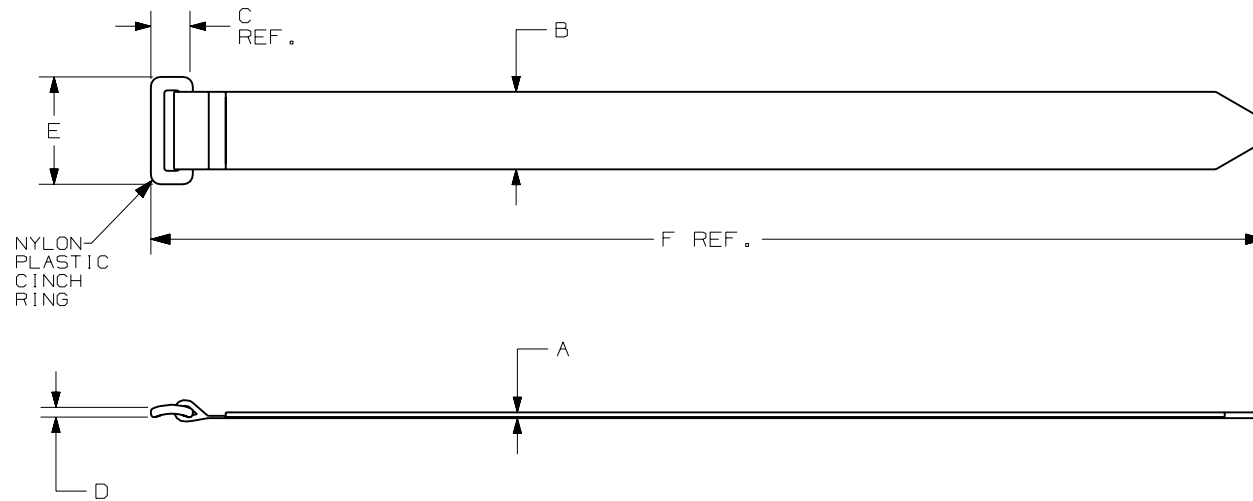

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PARTS (g)
	MIN. in (mm)	MAX. in (mm)									
UCT3S	.63 (16.0)	3.0 (76.2)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	12.0 (305)	50 (222)	STANDARD	.59 (267)
UCT5S	.63 (16.0)	5.0 (127)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	18.0 (457)	50 (222)	STANDARD	.81 (366)

NOTES:

- 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
- 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

SS\_27366\_00.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES  
ULTRA-CINCH HOOK & LOOP TIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .25 (.XXX) ± .030  
(.XX) ± .125 ANGLES ±

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
JABO

MAT'L:

SCALE  
NONE

7 4/12/06 FAB

ADDED PART WEIGHTS

27366 7

DATE  
6/19/02

WOVEN NYLON  
HOOK/LOOP  
COLOR: BLACK

DRAWING NO.  
SS-27366

DWG  
A  
SIZE

REV DATE BY CHK

DESCRIPTION

ECN - R CUST SUP

CHK'D  
DWW