


## P1™ Non-Laminated Label Cassettes

- P1™ Label Cassette contains an integrated memory device for automatic formatting, recall of last legend used, and number of labels remaining in the cassette

- Fast loading label cassette includes both label material and ribbon to make changing labels easy
- Non-laminated adhesive labels for wire/cable identification



## Part Number System for Wire/Cable Labeling

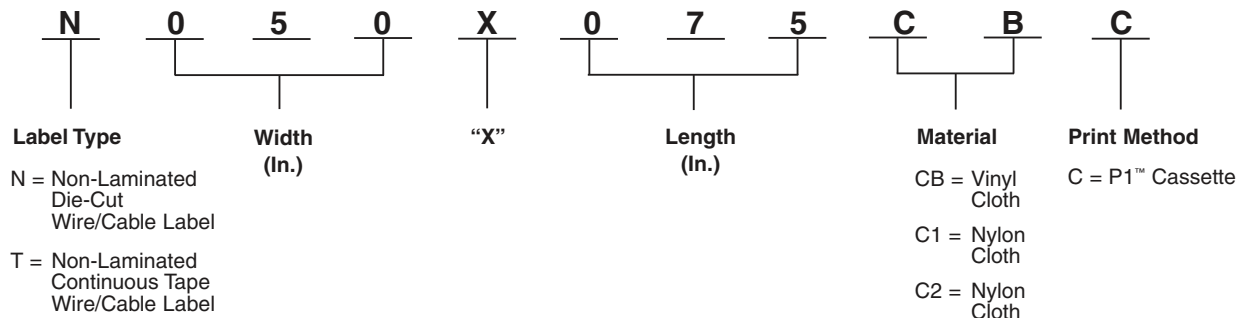

### Material/Print Method Selection Chart

| Material   | Print Method | Temperature Range                  | Features   |
|--|--------------|------------------------------------|--|
| Vinyl Cloth<br>White Print-On (CB)                         | P1™ Cassette | 50°F to 170°F<br>(10°C to 77°C)    | General purpose material, vinyl impregnated cloth resists oil and abrasion; material can be removed, repositioned, and reused. |
| Nylon Cloth<br>White Print-On (C1)<br>Yellow Print-On (C2) |              | -40°F to 285°F<br>(-40°C to 140°C) | General purpose material for wire and cable marking as well as flat surfaces; superior legibility; not repositionable.         |

| Part Number  | Part Description                         | Height |      | Length |     | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|--|--------|------|--------|-----|----------------|----------------|
|  |  | In.    | mm   | Ft.    | m   |                |                |
| <b>Continuous – For Use in PanTher™ LS8E and Cougar™ LS9 Hand-Held Thermal Transfer Printers</b> |  |        |      |        |     |                |                |
| T050X000CBC-BK   | Black on white, vinyl cloth tape.        | 0.50   | 12.7 | 12.5   | 3.8 | 1              | 10             |
| T100X000CBC-BK   | Black on white, vinyl cloth tape.        | 1.00   | 25.4 | 12.5   | 3.8 | 1              | 10             |
| T038X000C1C-BK   | Black on white, nylon cloth label tape.  | 0.38   | 9.7  | 18.0   | 5.5 | 1              | 10             |
| T038X000C2C-BK   | Black on yellow, nylon cloth label tape. | 0.38   | 9.7  | 18.0   | 5.5 | 1              | 10             |
| T050X000C1C-BK   | Black on white, nylon cloth label tape.  | 0.50   | 12.7 | 18.0   | 5.5 | 1              | 10             |
| T050X000C2C-BK   | Black on yellow, nylon cloth label tape. | 0.50   | 12.7 | 18.0   | 5.5 | 1              | 10             |
| T075X000C1C-BK   | Black on white, nylon cloth label tape.  | 0.75   | 19.1 | 18.0   | 5.5 | 1              | 10             |
| T075X000C2C-BK   | Black on yellow, nylon cloth label tape. | 0.75   | 19.1 | 18.0   | 5.5 | 1              | 10             |
| T100X000C1C-BK   | Black on white, nylon cloth label tape.  | 1.00   | 25.4 | 18.0   | 5.5 | 1              | 10             |
| T100X000C2C-BK   | Black on yellow, nylon cloth label tape. | 1.00   | 25.4 | 18.0   | 5.5 | 1              | 10             |

Table continues on page E1.6

A. System Overview

## P1™ Non-Laminated Label Cassettes (continued)

B1. Cable Ties

| Part Number   | Part Description   | Width |       | Length |       | Min. Cable O.D. |       | Max. Cable O.D. |       | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|--|-------|-------|--------|-------|-----------------|-------|-----------------|-------|----------------|----------------|
|   |  | In.   | mm    | In.    | mm    | In.             | mm    | In.             | mm    |                |                |
| <b>Die-Cut – For Use in PanTher™ LS8E Hand-Held Thermal Transfer Printers</b> |  |       |       |        |       |                 |       |                 |       |                |                |
| <b>N050X075CBC</b>  | White, perforated vinyl cloth label for 18 – 14 AWG wires, 125/cassette.   | .50   | 12.70 | .75    | 19.05 | .24             | 6.10  | .51             | 12.95 | 1              | 10             |
| <b>N050X150CBC</b>  | White, perforated vinyl cloth label for Cat. 5e/Cat. 6 cable, 75/cassette. | .50   | 12.70 | 1.50   | 38.10 | .48             | 12.19 | 1.02            | 25.91 | 1              | 10             |
| <b>N100X125CBC</b>  | White, perforated vinyl cloth label for 12 – 10 AWG wires, 75/cassette.    | 1.00  | 25.40 | 1.25   | 31.75 | .40             | 10.16 | .85             | 21.59 | 1              | 10             |
| <b>N100X150CBC</b>  | White, vinyl cloth label for Cat. 5e/Cat. 6 cable, 75/cassette.            | 1.00  | 25.40 | 1.50   | 38.10 | .48             | 12.19 | 1.02            | 25.91 | 1              | 10             |
| <b>N100X175CBC</b>  | White, perforated vinyl cloth label for 8 – 4 AWG wires, 50/cassette.      | 1.00  | 25.40 | 1.75   | 44.45 | .56             | 14.22 | 1.19            | 30.23 | 1              | 10             |

Order number of rolls required.

C2. Surface Raceway

## **NEW!** P1™ Turn-Tell™ Label Cassettes for PanTher™ LS8E Hand-Held Thermal Transfer Printer

C3. Abrasion Protection

C4. Cable Management

- Fast loading P1™ Label Cassette includes both label material and ribbon to make changing labels easy
- Innovative label design allows labels to rotate for visibility from any angle, and for repositioning on the wire/cable to align legends and improve aesthetics
- Labels can be easily installed on existing terminated wires and assemblies without disconnecting the wires/cables
- Temperature range: -40°F to 200°F (-40°C to 93°C)


D1. Terminals



D2. Power Connectors

D3. Grounding Connectors

## Part Number System for Wire/Cable Labeling

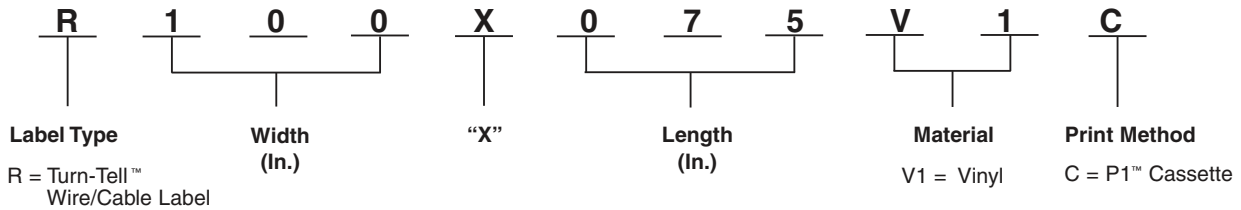

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

| Part Number        | Part Description                                    | Width |      | Length |      | Print-On Area Height |      | Min. Cable O.D. |     | Max. Wire O.D. |     | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------|---|-------|------|--------|------|----------------------|------|-----------------|-----|----------------|-----|----------------|----------------|
|                    |   | In.   | mm   | In.    | mm   | In.                  | mm   | In.             | mm  | In.            | mm  |                |                |
| <b>R100X075V1C</b> | White print-on, 18-14 AWG wire/cable, 150/cassette. | 1.00  | 25.4 | 0.75   | 19.1 | 0.25                 | 6.4  | 0.12            | 3.1 | 0.16           | 4.1 | 1              | 10             |
| <b>R100X125V1C</b> | White print-on, 12-10 AWG wire/cable, 100/cassette. | 1.00  | 25.4 | 1.25   | 31.8 | 0.38                 | 9.7  | 0.16            | 4.1 | 0.22           | 5.6 | 1              | 10             |
| <b>R100X150V1C</b> | White print-on, Cat 5/5e/6 cable, 100/cassette.     | 1.00  | 25.4 | 1.50   | 38.1 | 0.50                 | 12.7 | 0.22            | 5.6 | 0.28           | 7.1 | 1              | 10             |
| <b>R100X225V1C</b> | White print-on, 8-4 AWG wire/cable, 75/cassette.    | 1.00  | 25.4 | 2.25   | 57.2 | 0.75                 | 19.1 | 0.28            | 7.1 | 0.39           | 9.9 | 1              | 10             |

Order number of cassettes required.