


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					CA9 SERIES CRIMP DIE	CA-800(EZ) SERIES CRIMP DIE
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]		
PMV1-3FB-3K	--	M3	.78 [19,8]	.23 [5,8]	.20 [5,1]	.64 [16,3]	.13 [3,3]	CD9-1A	CD-800-1
PV18-6FB-3K	#6	M3,5	.78 [19,8]	.30 [7,6]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
PV18-6FNB-3K	#6	M3,5	.78 [19,8]	.25 [6,4]	.20 [5,1]	.64 [16,3]	.15 [3,8]		
PV18-8FB-3K	#8	M4	.84 [21,3]	.32 [8,1]	.23 [5,8]	.68 [17,2]	.17 [4,3]		
PV18-10FB-3K	#10	--	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PV18-10FNB-3K	#10	--	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PMV1-5FB-3K	--	M5	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]		
PV18-14FB-3K	1/4"	M6	1.03 [26,2]	.44 [11,2]	.33 [8,4]	.78 [19,9]	.27 [6,9]		

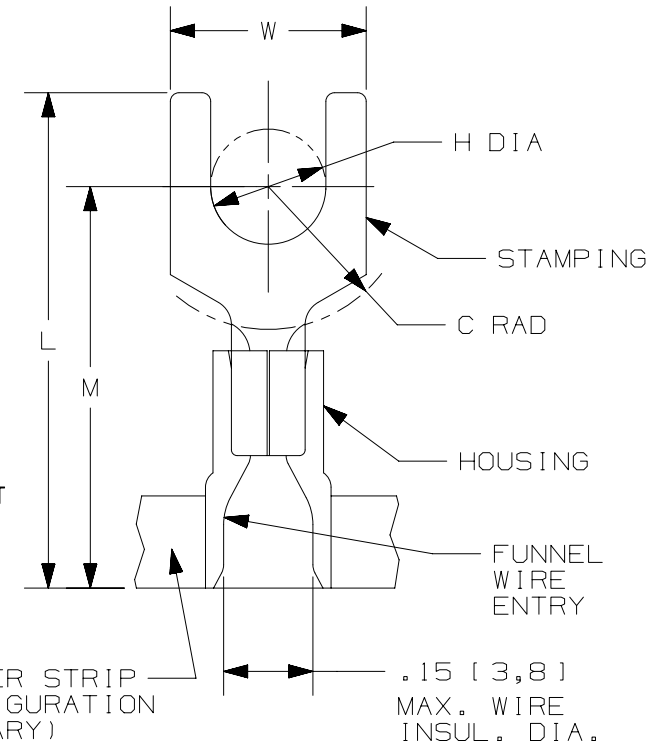


PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
  - A. #22-18 AWG [0,5-1,0 mm<sup>2</sup>] SOLID OR STRANDED COPPER WIRE
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600 V. MAX. VOLTAGE RATING
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- MATERIAL:
  - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
  - B. HOUSING: VINYL, RED
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: 1/4" <sup>+1/32</sup><sub>-0</sub> [6,4mm <sup>+0,8</sup><sub>-0</sub>]

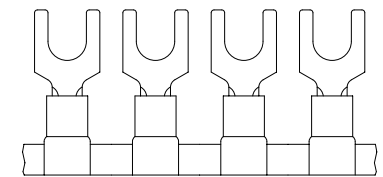

TITLE		FORK TERMINALS, 2 PC. VINYL INSULATED, #22-18, CONTINUOUS REEL		
		CUSTOMER DRAWING		
ITEM REVISION NAME		N41081BA/08		
DATASET FILE NAME		N41081BA_DC/08A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:  SEE NOTES		
.X ± .XX ±		.XXX ± ANGLES ±		
DRAWN BY DSM		DATE -		THIRD ANGLE PROJECTION SCALE N.T.S.
CHK FS		DRAWING NUMBER: A41081		SIZE A
REV		SHT 1 OF 1		

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08	1/17	TMR	TMR	RGB	ADMINISTRATIVE CHANGE SEE ECN	N41081BA-A41081
07	12/16	TMR	TMR	RGB	REVISED CERTIFICATION, C DIM TOL WAS .015	N41081BA-A41081
06	12/16	TMR	TMR	RGB	NONE, UPDATE TO REV 7	N41081BA-A41081
05	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41081BA-A41081
04	09.17.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41081

D10100DA/15