THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PV14-6FFB-3K	#6	.80 (20.32)	.28 (7.11)	.19 (4.83)	.64 (16.26)	.15 (3.81)
PV14-8FFB-3K	#8	.86 (21.84)	.31 (7.87)	.23 (5.84)	.68 (17.27)	.17 (4.32)
PV14-10FFB-3K	#10	.86 (21.84)	.35 (8.89)	.23 (5.84)	.68 (17.27)	.20 (5.08)

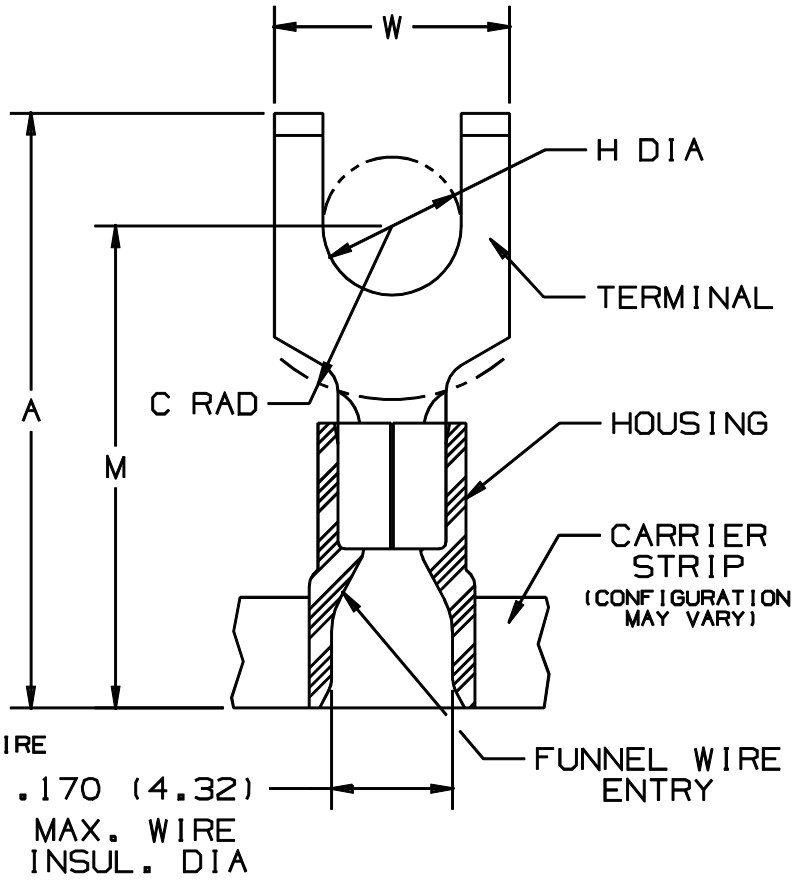

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR :
   A. 600 V MAX. VOLTAGE RATING
   B. 221°F (105°C) MAX. TEMP. RATING
   C. #16-14 AWG (1.5-2.5 mm^2) SOLID OR STRANDED, COPPER WIRE
2. PACKAGE QTY. : 3K = 3000 PCS.
   CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL :
   A. STAMPING - .03" THK COPPER, TIN PLATED
   B. HOUSING - BLUE VINYL
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS :
   A. PRESSES - CP-851, CP-860, CP-861
   B. APPLICATOR - CA-800
   C. DIE INSERTS - CD-800-2

LISTED 587H E52164

CERTIFIED LR31212



A41077_04

REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST
04	12/00	ED		FILESPEC WAS: N41077AA_PCD_03	03774		
03	11/95	ED		REVISIONS TO NOTES AND TABLE			

PANDUIT CORP. TINLEY PARK, ILLINOIS

TERMO 2PC CONTINUOUSLY MOLDED VINYL INSULATED, #16-14 BARREL, FLANGED FORKS

DRAWN BY	CHK'D	SCALE	DRAWING NO
FES	FS	NONE	A41077