THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.020	W ±.010	C ±.015	M ±.020	H ±.010
PN18-6LF-3K	#6	.82 (20.82)	.27 (6.9)	.19 (4.82)	.63 (16.00)	.15 (3.81)
PN18-8LF-3K	#8	.89 (22.61)	.29 (7.37)	.23 (5.84)	.68 (17.27)	.16 (4.06)
PN18-10LF-3K	#10	.89 (22.61)	.33 (8.38)	.23 (5.84)	.68 (17.27)	.19 (4.83)

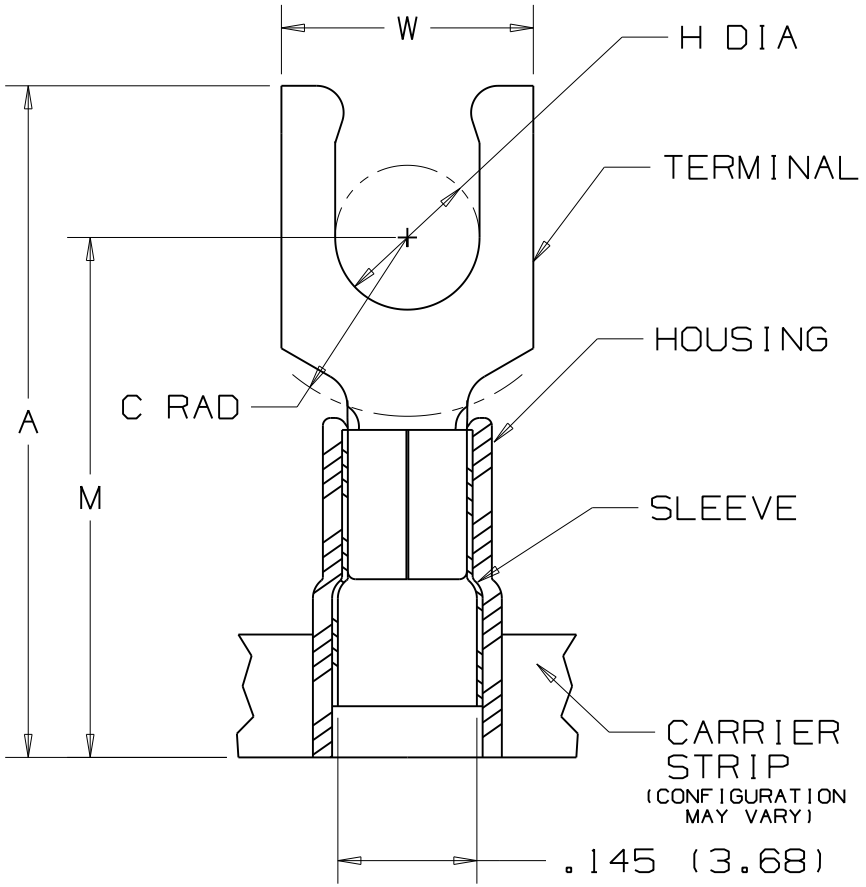

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 600 V MAX. VOLTAGE RATING (1000V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
   B. 221°F (105°C) MAX. TEMP. RATING OF INSULATION MATERIAL
   C. #22-18 AWG (0.5-1.5 mm²) SOLID OR STRANDED COPPER WIRE
2. PACKAGE QTY. : 3K = 3000 PCS. CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL:
   A. STAMPING - .03" THICK COPPER, TIN PLATED
   B. HOUSING - RED NYLON
   C. SLEEVE - BRASS, TIN PLATED
4. WIRE STRIP LENGTH: $7/32^{+1/32}_{-0}$ ($5.6^{+0.8}_{-0}$)
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
6. INSTALLATION TOOLS :
   A. PRESSES - CP-851, CP-860, CP-861
   B. APPLICATOR - CA-800
   C. DIE INSERTS - CD-800-1

LISTED 587H E52164

CERTIFIED LR31212



A41103

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST
08	3/10	SRB		Changed "W" dimension for PN18-6LF-3K			

PANDUIT CORP. TINLEY PARK, ILLINOIS

TERMO 3PC. CONTINUOUSLY MOLDED NYLON INSULATED, 22-18 BARREL, LOCKING FORKS

DRAWN BY	CHK'D	SCALE	DRAWING NO.
GRM		NONE	A41103