


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

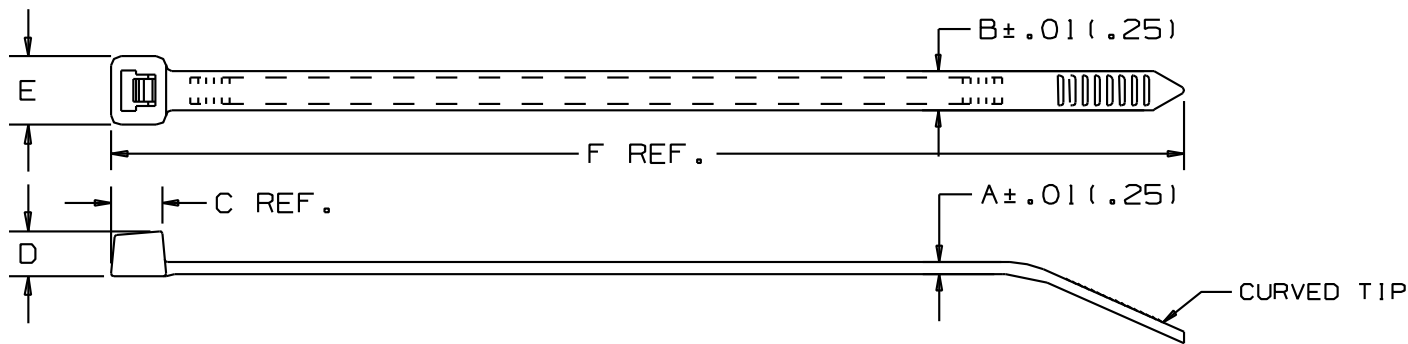

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	.07 (32)
PLT2I	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	.20 (91)
PLT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	.29 (132)
PLT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	.45 (204)

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE. SEE NOTE 2 FOR PART NUMBER SUFFIX FOR PART COLOR.
- 2. CABLE TIES ARE AVAILABLE IN 4 DIFFERENT FLUORESCENT COLORS:

PART NUMBER SUFFIX	COLOR
-53	ORANGE
-54	YELLOW
-55	GREEN
-59	PINK

REV							DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				
06	9/13/13	BWG	KJM	RTFI	UPDATED TOLERANCES & TITLE BORDER. SEE ECN FOR COMPLETE DETAILS			SS-26476/06	PAN-TY FLUORESCENT LOCKING CABLE TIE					CUSTOMER DRAWING			
													ITEM REVISION NAME				
													108015KO/00				
													DATASET FILE NAME				
													108015KO/00 SS_26476_REV06				
													UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)				
													.x : .005 (0.125) .xxx : .020 (.51)				
													.xx : .02 (.51) ANGLES :				
													DRAWING NUMBER:				
													SS - 26476				
													DRAWN BY				
													C.HARVELL				
													DATE				
													11/08/91				
													CHK				
													HVP				
													SCALE				
													NONE				
													SHT 1 OF 1				
													SIZE				
													A				

D:\101000A\16