


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

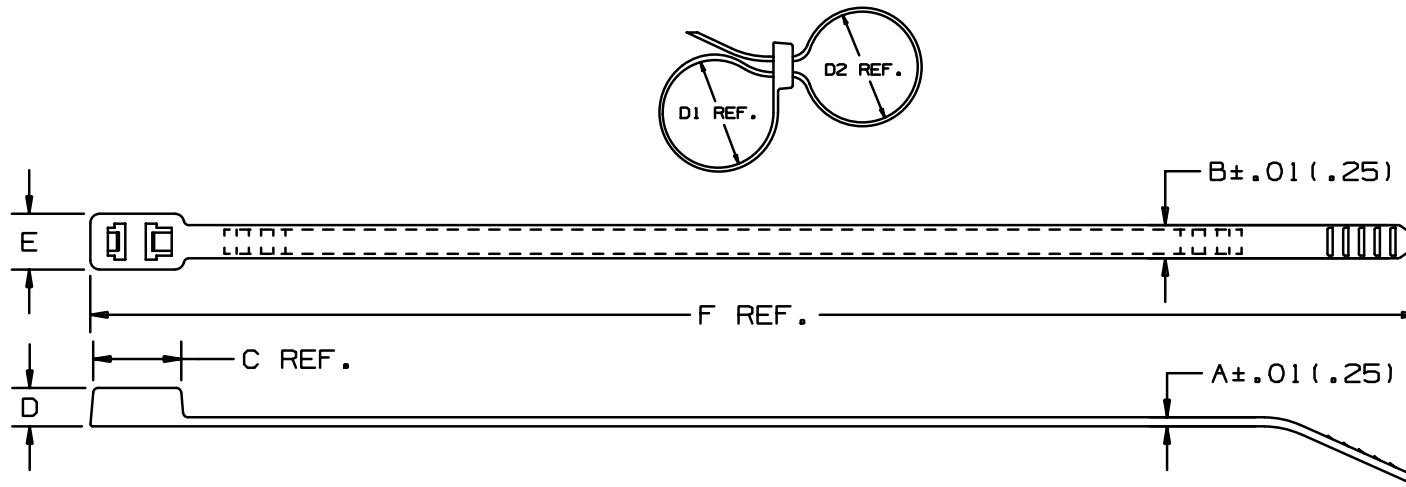

PANDUIT PART NO. *	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PLB2S	1.8 (45.7)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	7.6 (193)	50 (222)	STANDARD	.34 (154)
PLB3S	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	11.8 (300)	50 (222)	STANDARD	.47 (214)
PLB4S	4.1 (104.1)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	14.8 (376)	50 (222)	STANDARD	.58 (262)

NOTES:

*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS									
SS-21645_05.PRT									
PANDUIT CORP. TINLEY PARK, ILLINOIS									
BOW-TY CABLE TIES PLB SERIES									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .005 (.127) (XXX) ± .020 (.51) (.XX) ± .02 (.5) ANGLES ± .005					UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.				
---	-----	---	ⓑ ADDED REF. TO D1 & D2 DIM.		-----	---	DRAWN BY KEM		MAT'L: NONE
5	2/18/99	KET	Ⓐ ADDED REF. TO C DIM.		21645	5	DATE 4/6/87		SCALE NONE
4	12/18/95	DKN	JCC	"C" DIM. .465 (11.8) WAS .438 (11.1)	21645	4	NYLON 6/6		DRAWING NO. SS-21645
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	DWG SIZE A