


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

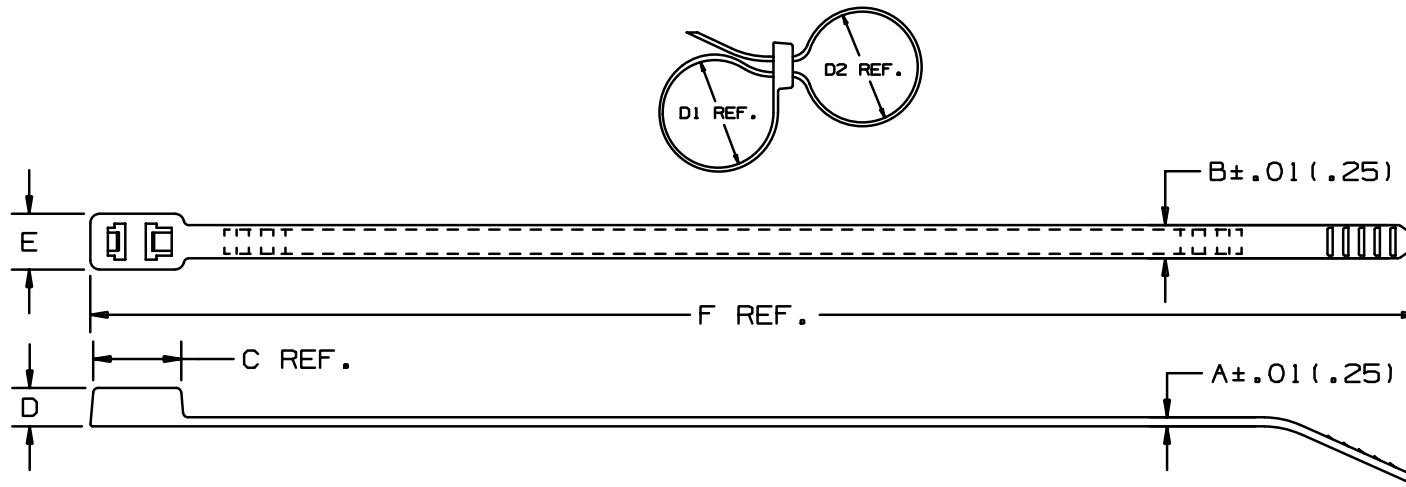

| PANDUIT PART NO. * | MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm) | A in (mm)  | B in (mm)  | C in (mm)   | D in (mm)  | E in (mm)  | F in (mm)  | MIN. LOOP TENSILE lbs (N) | CROSS SECTION | WEIGHT lbs/100 pcs. (g) |
|--------------------|---|------------|------------|-------------|------------|------------|------------|---------------------------|---------------|-------------------------|
| PLB2S              | 1.8 (45.7)                                | .052 (1.3) | .190 (4.8) | .465 (11.8) | .220 (5.6) | .320 (8.1) | 7.6 (193)  | 50 (222)                  | STANDARD      | .34 (154)               |
| PLB3S              | 3.0 (76.2)                                | .052 (1.3) | .190 (4.8) | .465 (11.8) | .220 (5.6) | .337 (8.6) | 11.8 (300) | 50 (222)                  | STANDARD      | .47 (214)               |
| PLB4S              | 4.1 (104.1)                               | .052 (1.3) | .190 (4.8) | .465 (11.8) | .220 (5.6) | .337 (8.6) | 14.8 (376) | 50 (222)                  | STANDARD      | .58 (262)               |

NOTES:

\*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

|     |          |     |                              |                                      |  |       |       |   |      |   |                     |                         |           |
|-----|----------|-----|------------------------------|--------------------------------------|--|-------|-------|---|------|---|---------------------|-------------------------|-----------|
|     |          |     |                              |                                      |  |       |       |   |      | DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS   |                     |                         |           |
|     |          |     |                              |                                      |  |       |       |   |      | SS-21645_05.PRT   |                     |                         |           |
|     |          |     |                              |                                      |  |       |       |   |      | PANDUIT CORP. TINLEY PARK, ILLINOIS   |                     |                         |           |
|     |          |     |                              |                                      |  |       |       |   |      | BOW-TY CABLE TIES<br>PLB SERIES   |                     |                         |           |
|     |          |     |                              |                                      |  |       |       |   |      | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:<br>(.X) ± .0005 (.XXX) ± .0010 (.51)<br>(.XX) ± .02 (.5) ANGLES ± .0005 |                     |                         |           |
|     |          |     |                              |                                      |  |       |       |   |      | UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.   |                     |                         |           |
| --- | -----    | --- | ⓑ ADDED REF. TO D1 & D2 DIM. |                                      |  | ----- | ---   |   |      | DRAWN BY<br>KEM   | MAT'L:<br>NYLON 6/6 | SCALE<br>NONE           |           |
| 5   | 2/18/99  | KET | Ⓐ ADDED REF. TO C DIM.       |                                      |  | 21645 | 5     |   |      | DATE<br>4/6/87  |                     | DRAWING NO.<br>SS-21645 | DWG<br>A  |
| 4   | 12/18/95 | DKN | JCC                          | "C" DIM. .465 (11.8) WAS .438 (11.1) |  |       | 21645 | 4 |      |   | CHK'D<br>HVP        |                         | SIZE<br>A |
| REV | DATE     | BY  | CHK                          | DESCRIPTION                          |  |       | ECN   | R | CUST | SUP   |                     |                         |           |