THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

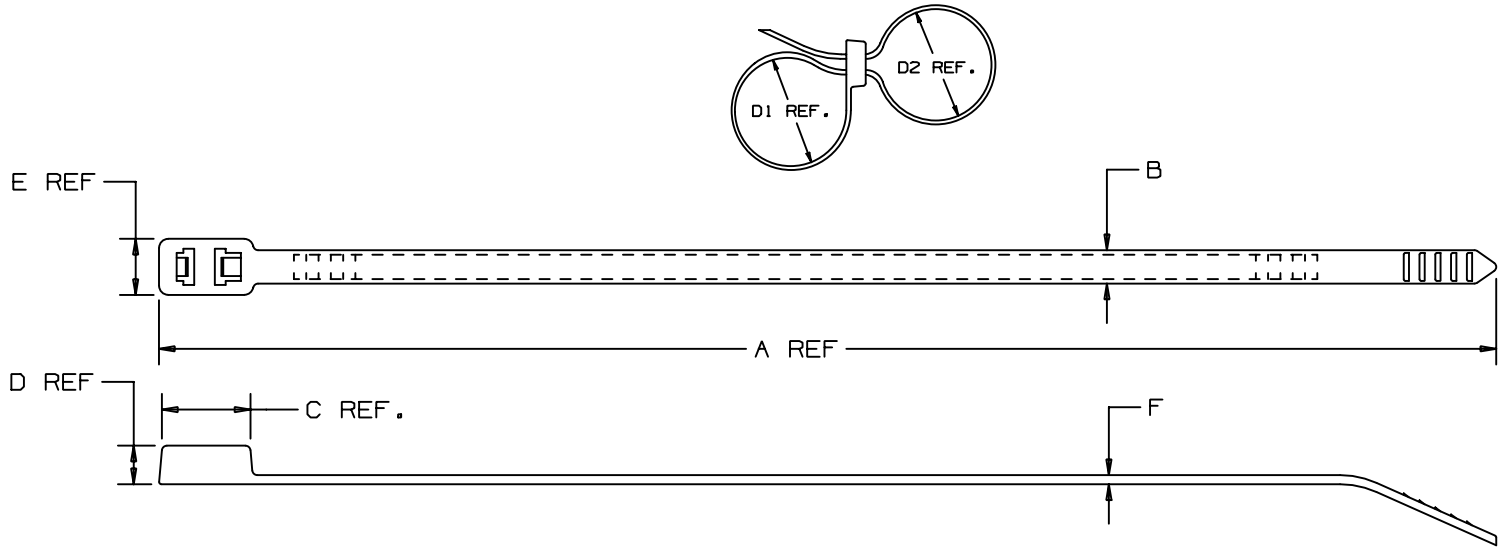

PANDUIT PART NO. *	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B ±.01in (±.25mm)	C in (mm)	D in (mm)	E in (mm)	F ±.01in (±.25mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PLB3S-M30	3.0 (76.2)	11.8 (300)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	.052 (1.3)	50 (222)	STANDARD	.47 (214)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PLB3S-M30 BOW-TY CABLE TIE
PLB SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY KET
DATE 6/4/96
CHK'D HVP

MAT'L; HEAT STABILIZED BLACK NYLON 6/6

SCALE NONE
DRAWING NO. SS-27026
DWG A
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
2	4/29/02	TJ		CHANGED FORMAT FOR CLARITY	27026 2		